



John Deere - HRN-GR09K1

Written By: Jason Fox

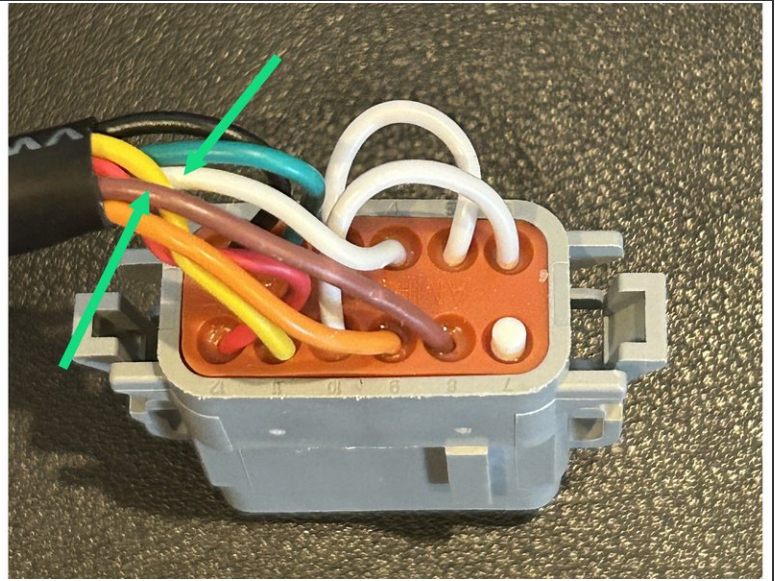


INTRODUCTION

Harness modification requirement for some John Deere vehicles using GoRugged with HRN-GR09K1.

In some cases you will see error codes on the dash and lose joystick functionality.

The modification to remedy this is to cut the pins F and G on the harness.

— John Deere - HRN-GR09K1

- ❗ Cut the **Brown wire** and **White wire** as shown in the image.
- ☑ Snip the wire close to the harness to avoid a floating wire, and insulate with tape.

-
- ⚠ **WARNING!** All in-vehicle devices and related cabling must be securely fastened and kept clear of all vehicle controls, including gas, brake and clutch pedals. To ensure all devices and cabling remain securely attached, inspect devices and cabling on a regular basis.
 - ⚠ Loose cabling or devices may impede the use of vehicle controls, resulting in unanticipated acceleration, braking, or other loss of vehicle control, which could lead to death or serious personal injury. Upon sudden acceleration or deceleration, improperly fastened, in-vehicle devices may detach and impact operators, which may cause injury.
-