HONDA TRX250X (2014 AND UP)

Written By: Sebastien Blain



Step 1 — Installing new Elka front shocks.






- Install shocks with the reservoir hose facing the front of quad.
- Install reservoirs on the frame as shown with the supplied mounting kit.

Step 2 — Installing new Elka rear shock.



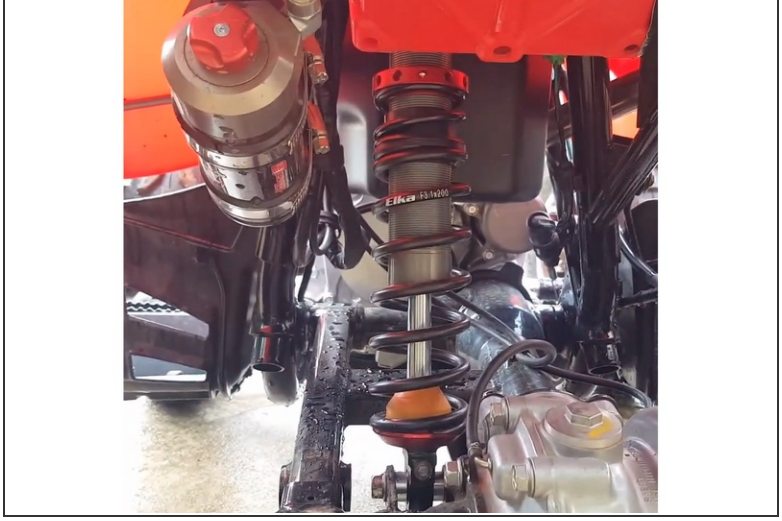

- Install rear shock with the hose fitting on head facing the rear of quad.
- Route the hose as shown and install reservoir on sub-frame as shown with the supplied mounting kit.
- The rebound adjuster screw must face the rear of quad. The lower eyelet can be turned if necessary.

© 2026