



## Fasteners

Written By: Iroh



---

## INTRODUCTION

Did you lose a screw in your Framework Desktop? Fear not! Follow this guide to replace your missing screws with the Framework Desktop Fastener Kit.



### TOOLS:

- [Framework Desktop Screwdriver](#) (1)
-

## Step 1 — Fastener information



- ❗ The Fastener Kit contains the following:
- Four screws labeled **"6.0 mm fastener with a 7.3 mm diameter 2.3 mm thick "**
  - Two large screws labeled **"M6 ring screws"**
  - Four screws labeled **"4.0 mm fastener with a 5.5 mm diameter 2.0 mm thick "**
  - Eight screws labeled **"4.0 mm fastener with a 5.5 mm diameter 0.9 mm thick "**
  - Four long screws labeled **"26.5 mm fastener with a 7.0 mm diameter 2.0 mm thick"**
- ❗ Your Framework Desktop comes with a spare screw of each size attached to the bottom of the top plate. You can use the Fastener Kit to replenish any screws you used there.
- Not included in the Fastener Kit is a silver 4.5 mm-long T5 Torx screw that secures the [SSD covers](#), [I/O shield](#), and [USB-C brackets](#).

## Step 2 — Top Panel screws




- The two screws labeled "**M6 ring screws**" secure the Top Panel.

## Step 3 — Fan screws



- The long screws labeled "**26.5 mm fastener with a 7.0 mm diameter 2.0 mm thick**" secure the Fan.

## Step 4 — Mainboard screws

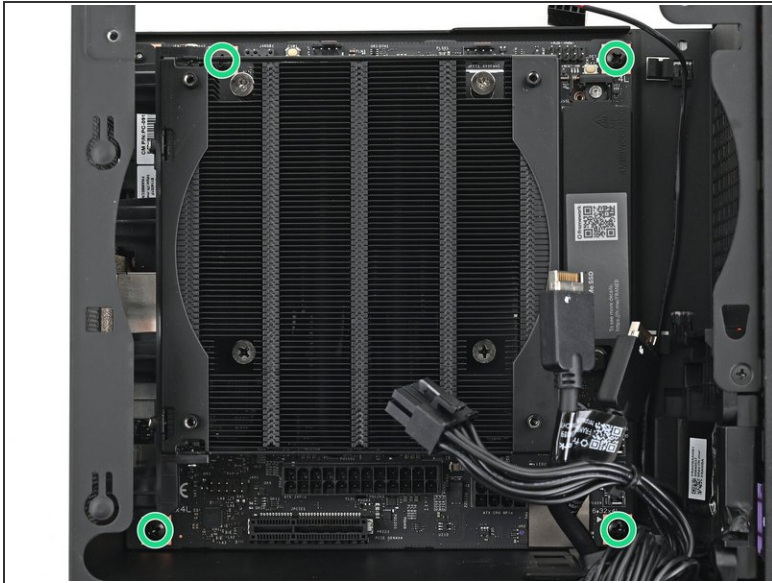

- The screws labeled **"6.0 mm fastener with a 7.3 mm diameter 2.3 mm thick "** secure the Mainboard.

## Step 5 — Power supply screws



- The screws labeled **"4.0 mm fastener with a 5.5 mm diameter 2.0 mm thick "** secure the power supply.

## Step 6 — Top plate screws




- The screws labeled **"4.0 mm fastener with a 5.5 mm diameter 0.9 mm thick "** secure the top plate.

## Step 7 — Rear plate screws



- The screws labeled **"4.0 mm fastener with a 5.5 mm diameter 0.9 mm thick "** secure the rear plate.

## Step 8 — Side power supply screw

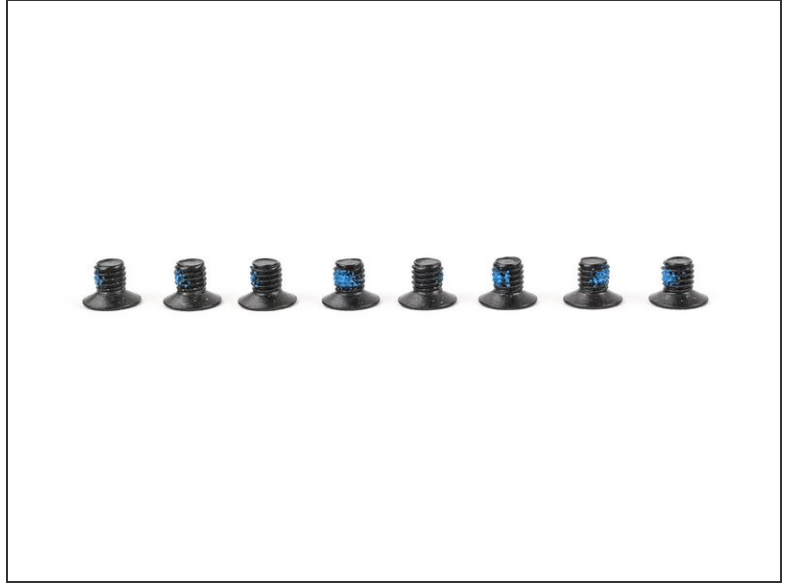

- The screws labeled **"4.0 mm fastener with a 5.5 mm diameter 0.9 mm thick "** secure the side of the power supply.

## Step 9 — Power duct screws



- The screws labeled **"4.0 mm fastener with a 5.5 mm diameter 2.0 mm thick "** secure the power supply.

If you need help, [contact Framework support](#).