ACE Chlorobite

Written By: Alkesh Dhak





— Requirements

- ACE Chlorobite controllers must be version 3.0 and have the 15430-1 emulation module.
- Earlier models, or those without the 15430-1 module can be upgraded by contacting ACE Electronics.

— Installation

⚠ The HRN-FAI cable must be used to prevent equipment damage. The ACE com port has +12V on pins 1 and 9. Do not use a standard straight cable!

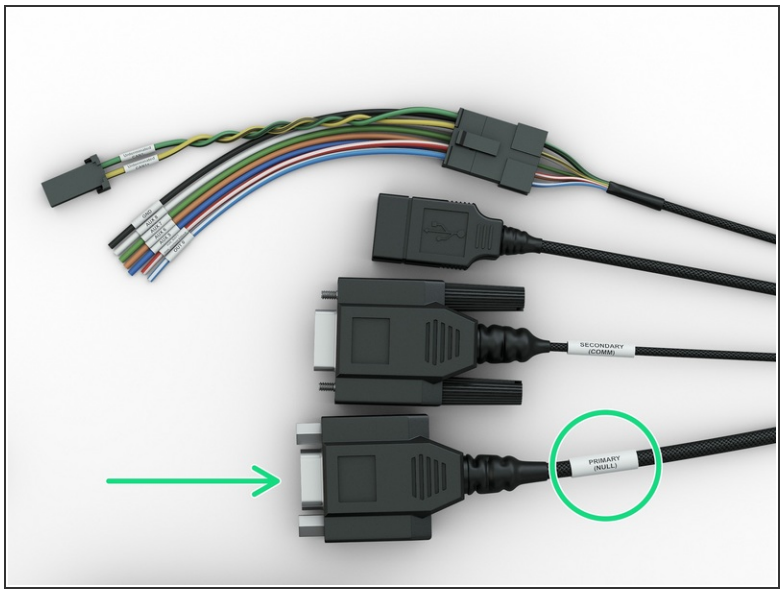

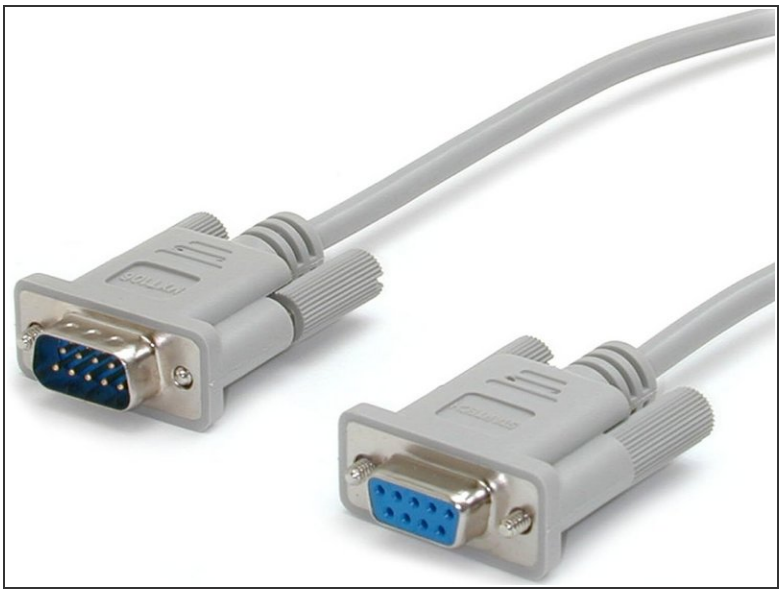

- The IOX-WRKS primary port connects (19200 baud) to the serial port on the ACE Infobite with the HRN-FAI cable.

Ensure the IOX-WRKS has the correct controller configuration loaded before proceeding to verification / simulation mode.

© 2024 - Uncontrolled If Printed