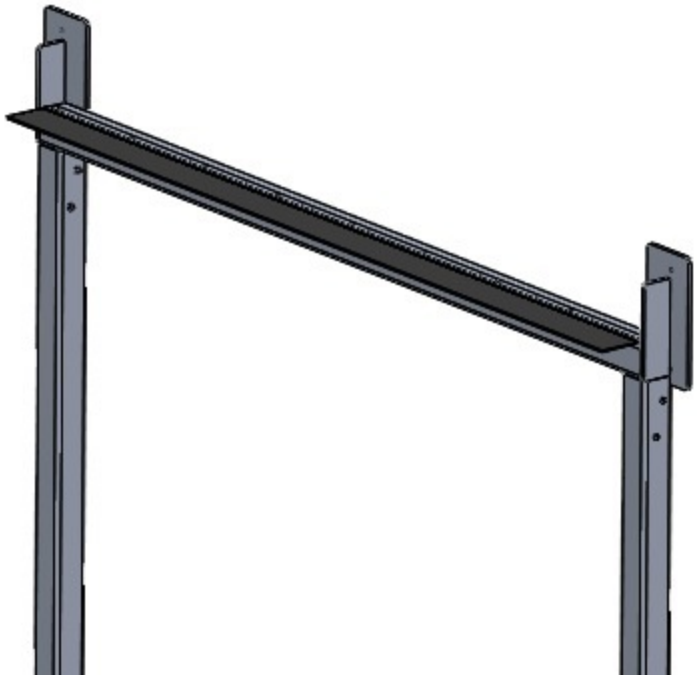
Mounting Brush onto Door Frame - Custom Setup

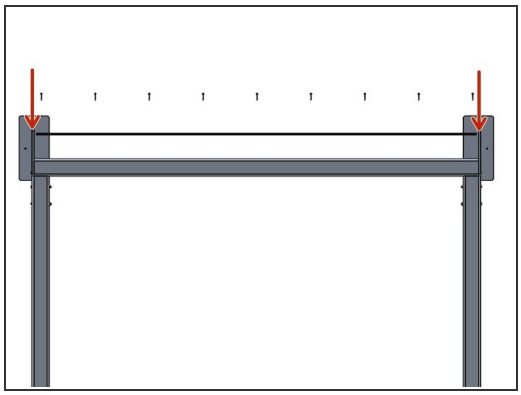
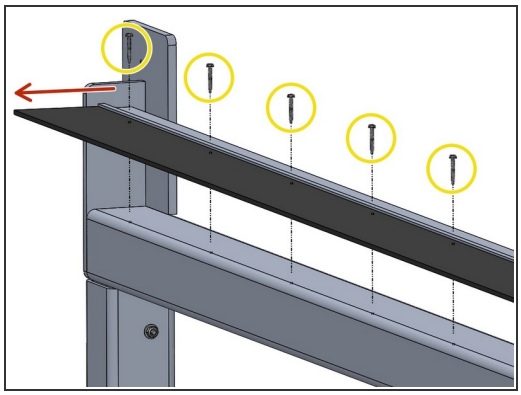
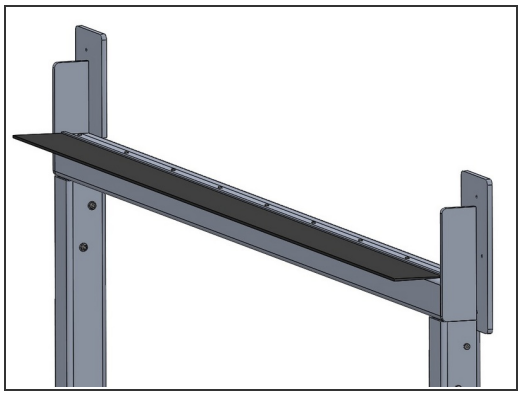
This guide will show you how to install a brush on a door frame, for frames that need to be sealed back to a wall/surface.

Written By: Trent Borgardt



© 2026

Step 1 — Mounting the Brush Seal onto the Door Frame

- On the back of the Door Frame, Center the Brush Assembly between the Structural Supports on the back of the Header Mounting Plates, with the Brush Protruding towards the Wall/Mounting Surface.
- Using the Provided Self-Drilling/Tapping Machine Screws, Secure the Brush Assembly directly into the Cross-Beam of the Door Frame.
  - ⓘ The Brush Retainer will have Pre-Drilled Holes to accept the Hardware.

⚠ It is easiest to Mount the Brush Assembly onto the Door Frame before mounting the Door onto the Frame.