
GL Keyless Go Jumper Harness (KG20166) Installation

Written By: Mid City Support

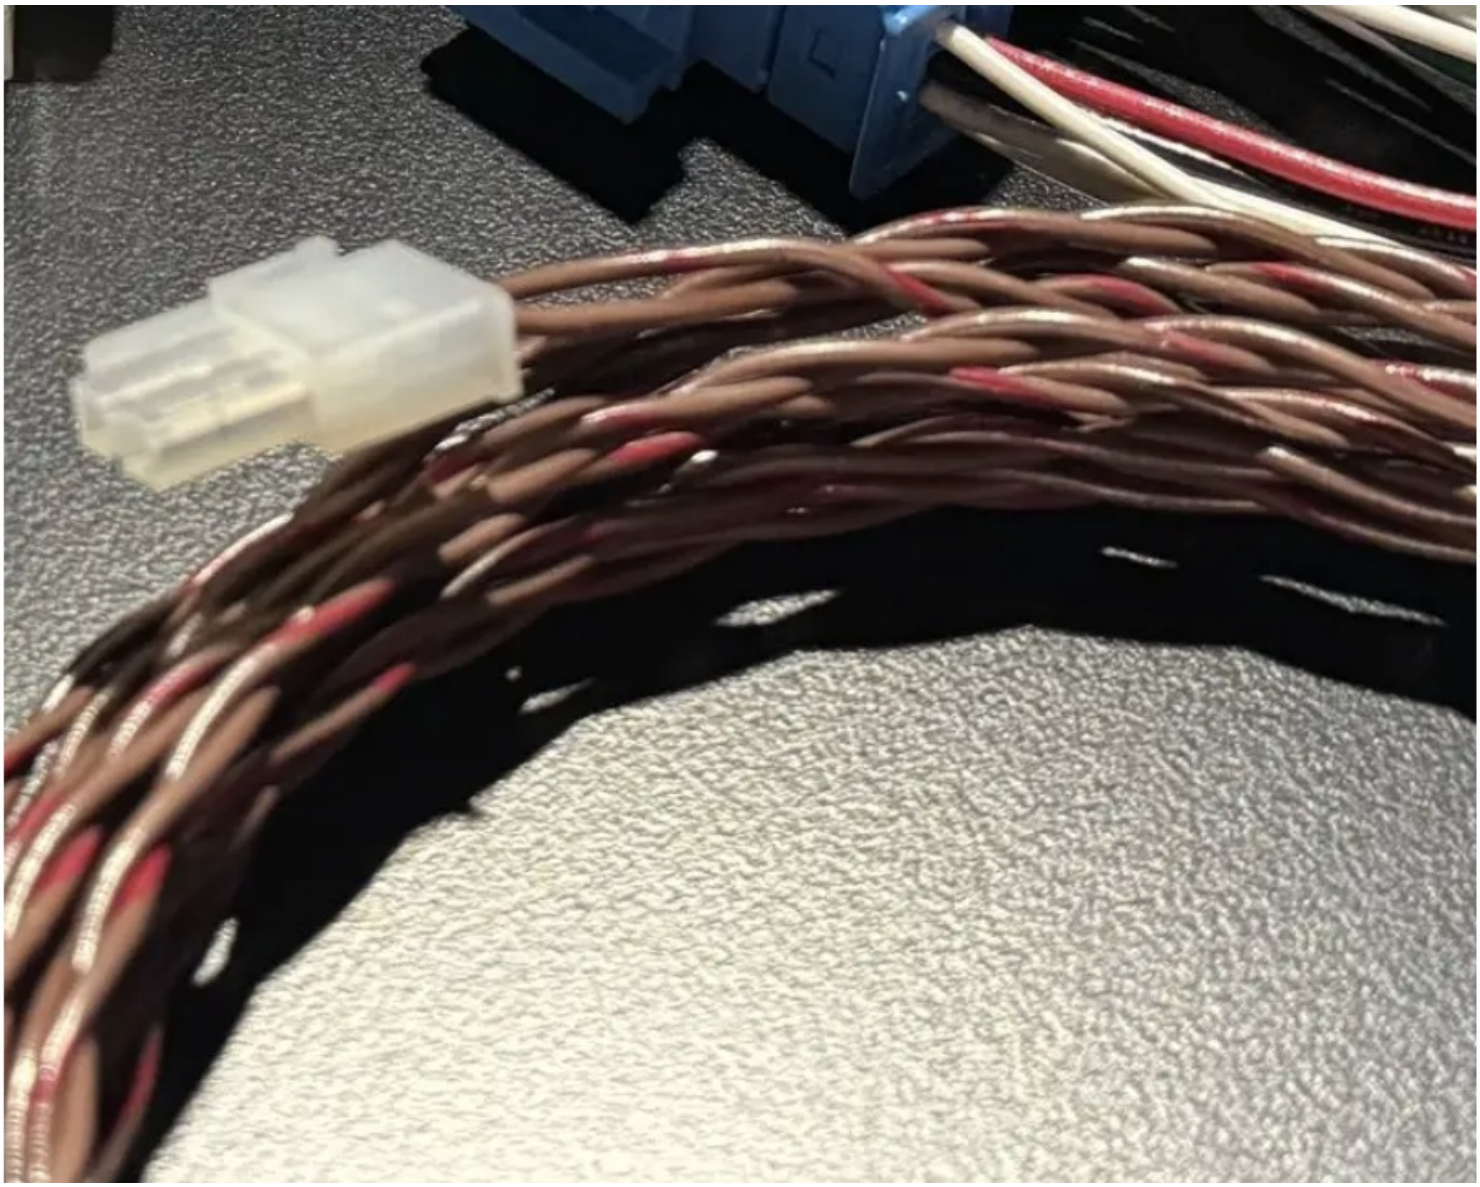

© 2026

INTRODUCTION

Keyless Go Jumper Harness (KG20166) Installation- only required if vehicle is equipped with Keyless Go (push button start)


© 2026

Step 1 — GL Keyless Go Jumper Harness (KG20166) Installation



- Remove driver’s rear door sill.

Step 2

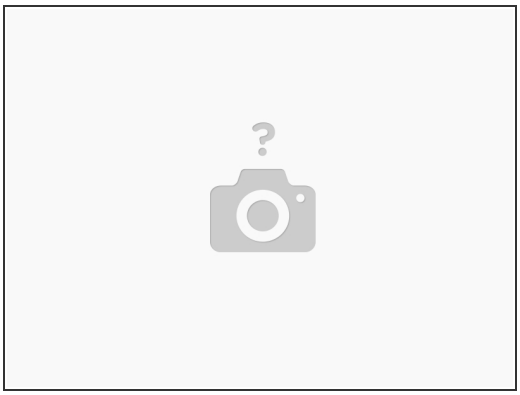

- Fold driver’s middle row seat all the way forward.

Step 3



- Remove torx bolt holding seat belt to rear side panel.

Step 4



- Pull back weather strip on the back side of the rear door opening.

Step 5






- Remove screw cover.
- Remove (1) T-30 torx from inside the rear retractible cover mount.

Step 6



- Pop side panel partially out.


Step 7

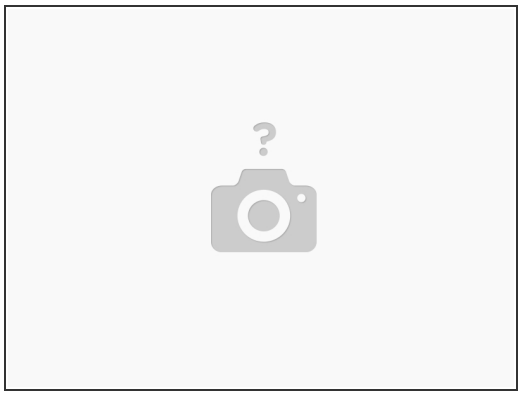

- Route the 166 KG adapter to the rear side panel area.


Step 8



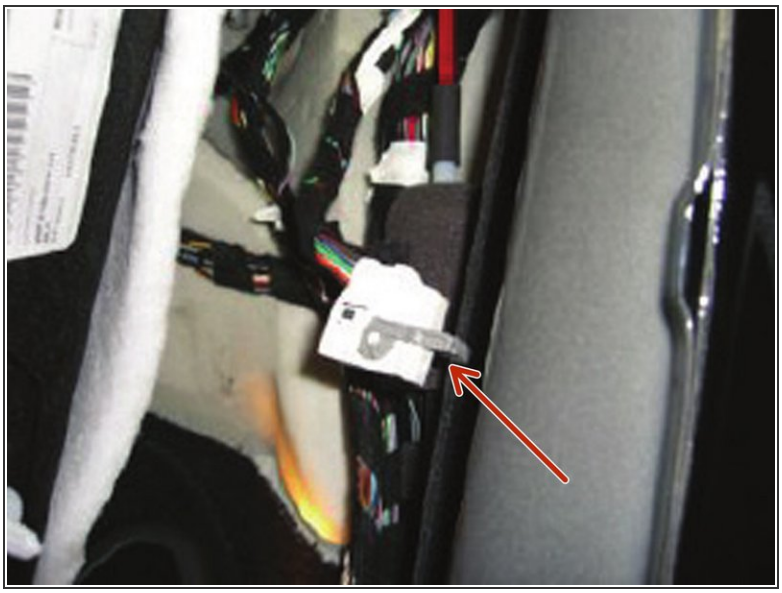


- Reach in and unplug connector on KG module (see picture).
- Plug removed

Step 9

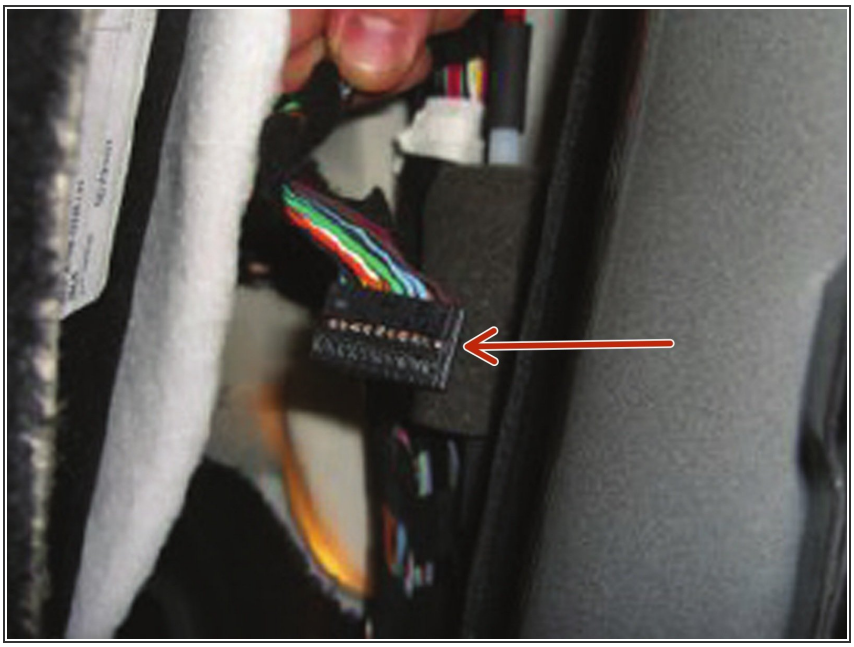


- Remove the shroud from that connector
- Shroud removed

Step 10

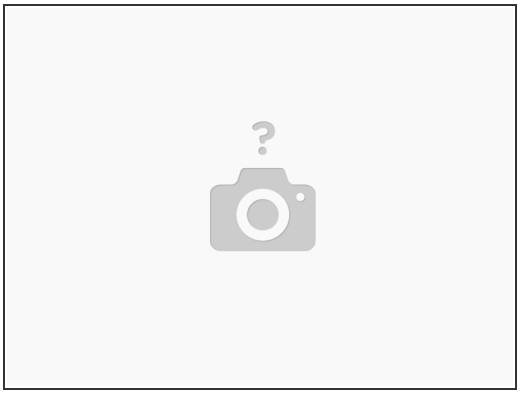


- Remove the brown and brown/red pins from the black connector making a note of their position

Step 11

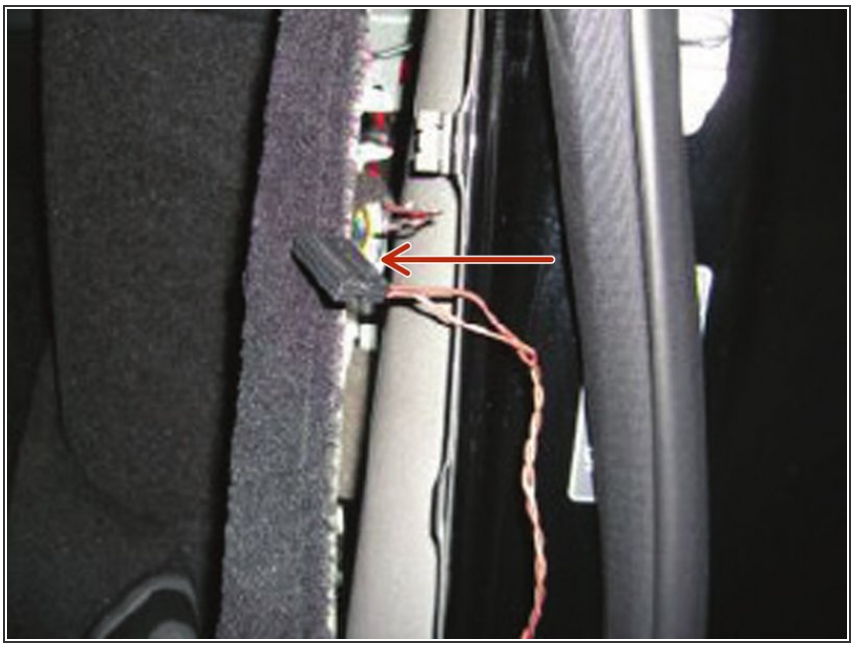


- Install the pins from the 166 KG adapter into the spots where the factory wires were removed.
- KG harness properly installed into plug

Step 12

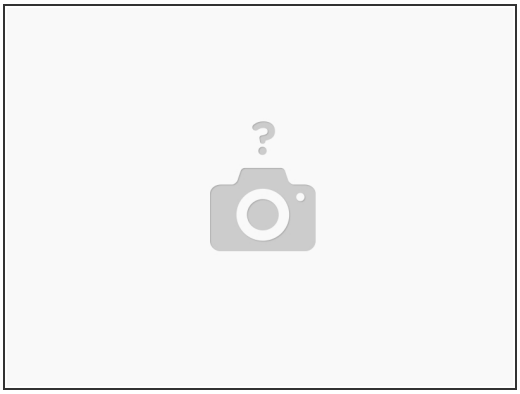


- Reinstall the shroud for that plug.

Step 13

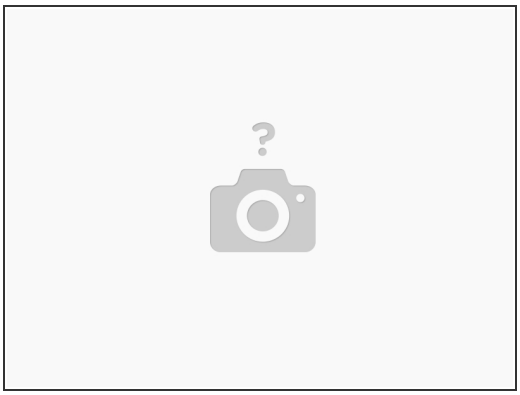


- Reinstall the plug into the module.

Step 14

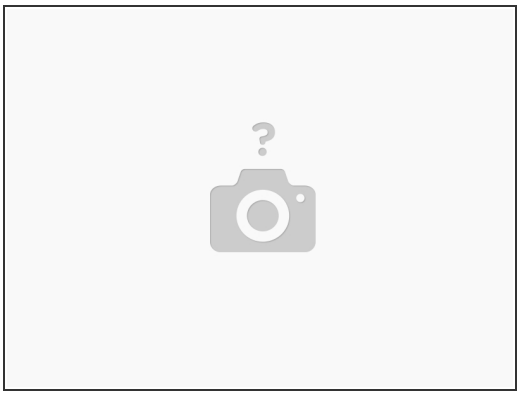


- Pop the side panel back into place.

Step 15

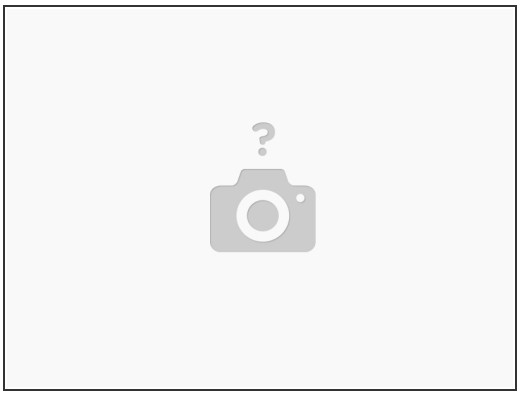

- Reinstall (1) T-30 Torx and cosmetic cover.

Step 16

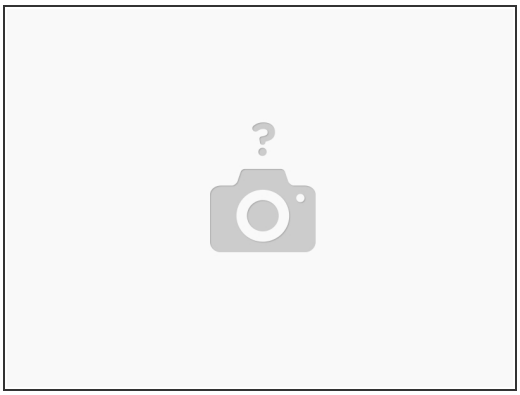

- Reinstall Torx bolt for seat belt.