

FORDMTE Ford Miles to Empty Correction Installation Manual

Ford Miles to Empty Correction Installation Manual

Written By: Mid City Support



Step 1 — Remove radio and climate control panel




- Remove trim panel on right side of climate controls and across the top of the climate and radio controls
- Release bolster panel on left side of controls
- Unbolt radio/climate controls and remove panel

Step 2 — Remove control modules



- Disconnect harnessing and plugs from radio control module
- There is a bracket holding both the radio control module and the gateway module. Remove bracket and pull both modules from dash cavity

Step 3 — Connect T-Harness

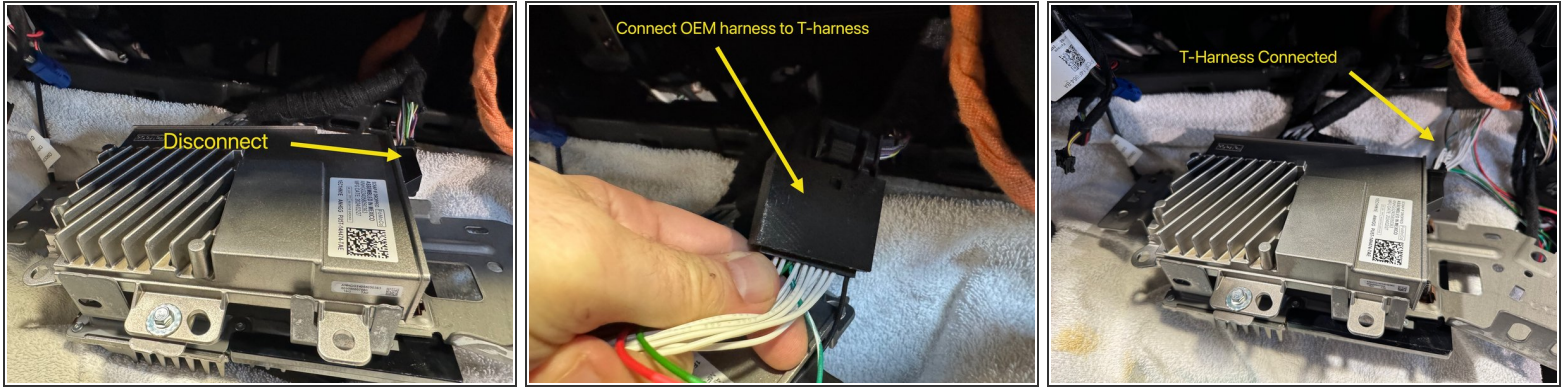

- Disconnect black plug from gateway module
- Connect OEM harness to mating plug on T-harness
- Connect T-harness to gateway module

Step 4 — Mount FORD-MTE module and reassemble dash



- Mount FORD-MTE module securely away from any heat sources or moving parts
- Re-install gateway module and radio control module
- Re-assemble control panel, bolster panel, and trim.

Step 5 — Tank Size Programming



- To adjust the tank size:
 - Turn vehicle ignition on and press the **back** button and the **down** buttons on the steering wheel simultaneously to reduce the tank size
 - Turn vehicle ignition on and press the **back** button and the **up** buttons on the steering wheel simultaneously to increase the tank size