Witch Wand

Use the printable template and these instructions to create a spooky light-up wand for Halloween!

Written By: Andy Wallus



© 2024

INTRODUCTION

Use the printable template and these instructions to create a spooky light-up wand for Halloween!

You can make this project (and many more!) with our **Paper Circuits Kit**.

TOOLS:

- Scissors (1)
- Markers, Crayons, or Colored Pencils (1)
- Push Pin (1)

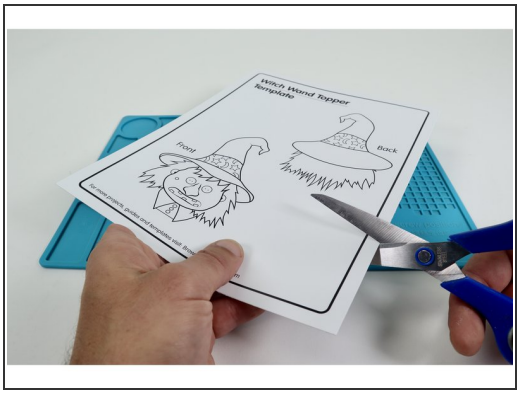
PARTS:

- Paper Circuits Kit (1)
- Printable Template (1)
- Masking Tape (1)
- Jumbo Craft Sticks (2)
- Glue (1)

© 2024

Step 1 — Gather, Print, Cut

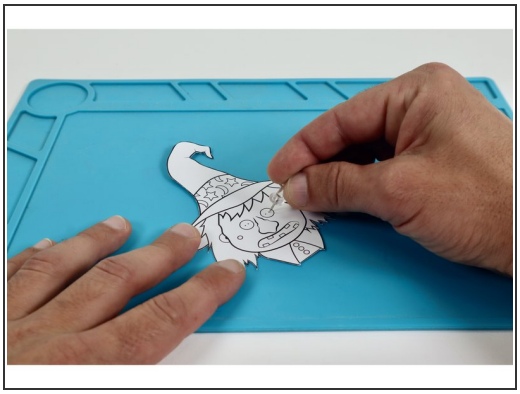


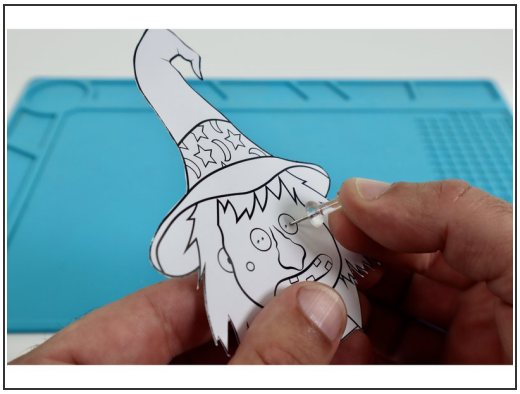




- **Gather all tools and materials** listed/pictured at left.
- After printing the template version of your choice, **use a scissors to carefully cut out the front and back of your witch**.

Step 2 — Poke Holes and Color Witch



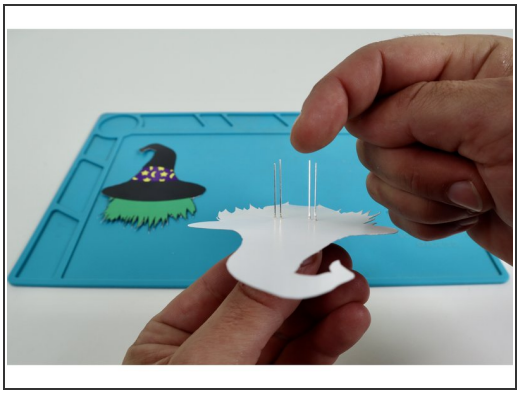




- **Use a push pin to poke out the four small holes** in the areas designated for the witch's eyes.
- **Color both halves of your witch** whichever way you wish!

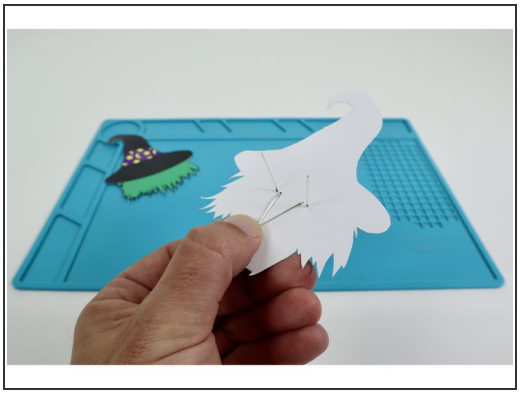
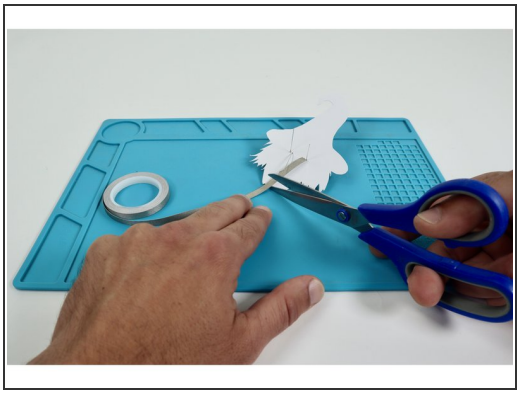
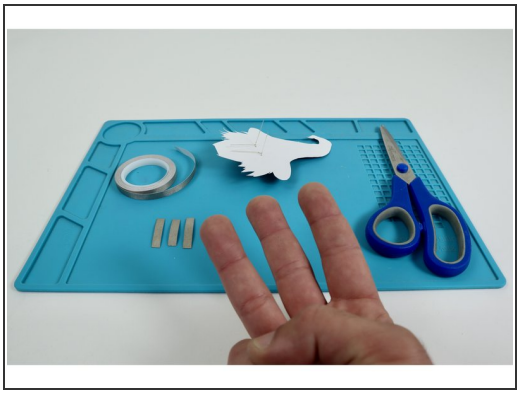
Step 3 — Thread LEDs





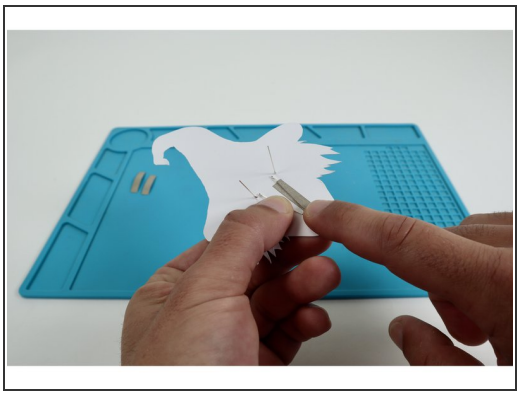
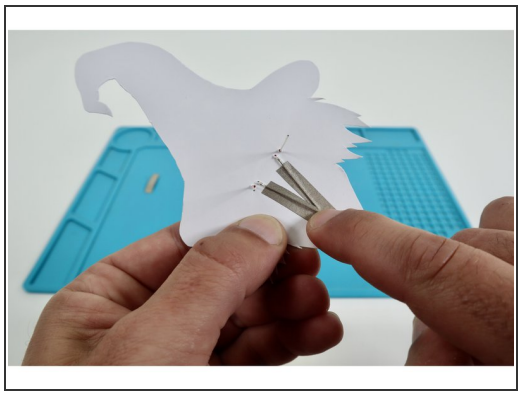
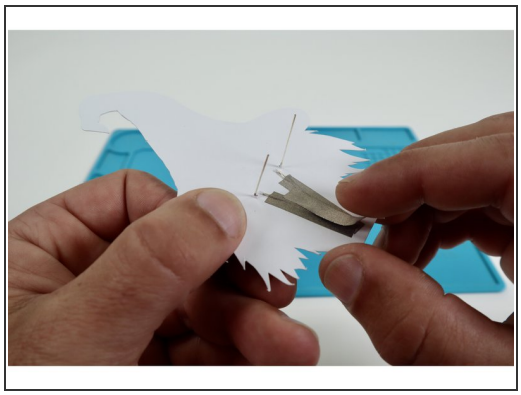
- **Thread each LED through a pair of holes taking care to orient the LED legs as pictured** with the shorter legs toward the outer edges and the long legs through the inner holes nearest the witch's nose.
- **If oriented correctly, the leg length orientation should match photo three.**

Step 4 — Prepare Long LED Legs and Tape

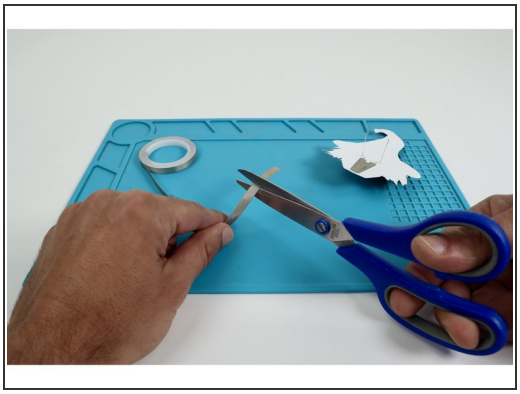
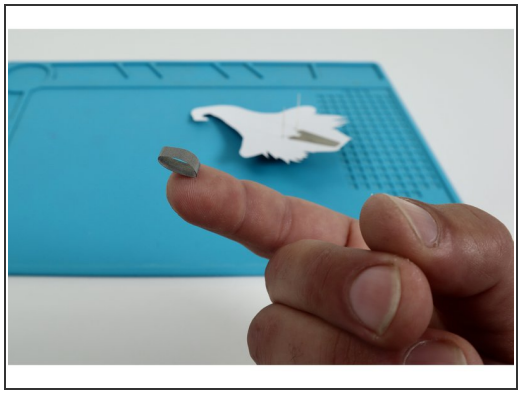
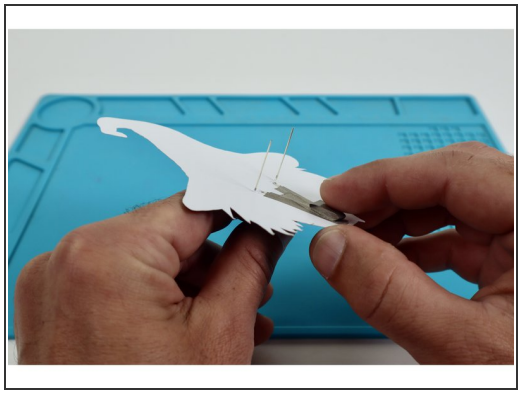
- **Fold the longer inner LED legs flat against the project in a slight "V".**
- **Measure and cut three pieces of Maker Tape** that are approximately the length of the Long LED Legs.

Step 5 — Tape Long LED Legs

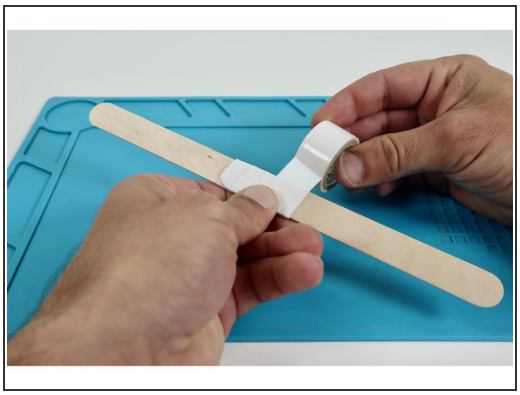
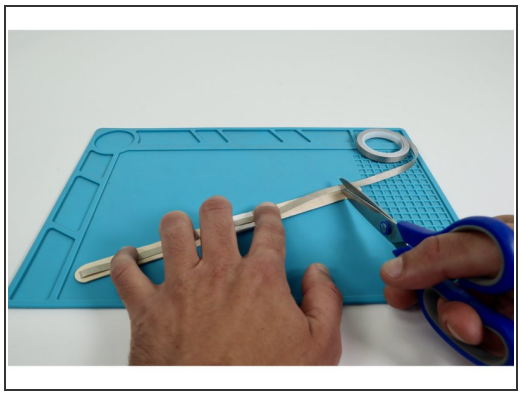
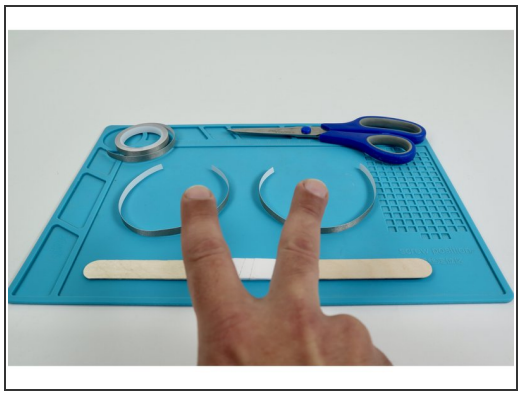
- **Peel and stick** one of your three Maker Tape pieces atop one of the long legs and onto the paper below it.
- **Peel and stick** one of your remaining two Maker Tape pieces atop the remaining long leg and onto the paper below it.
- **Peel and stick** the last piece of Maker Tape as shown in photo three.

Step 6 — Prepare and Place Tape Loop 1

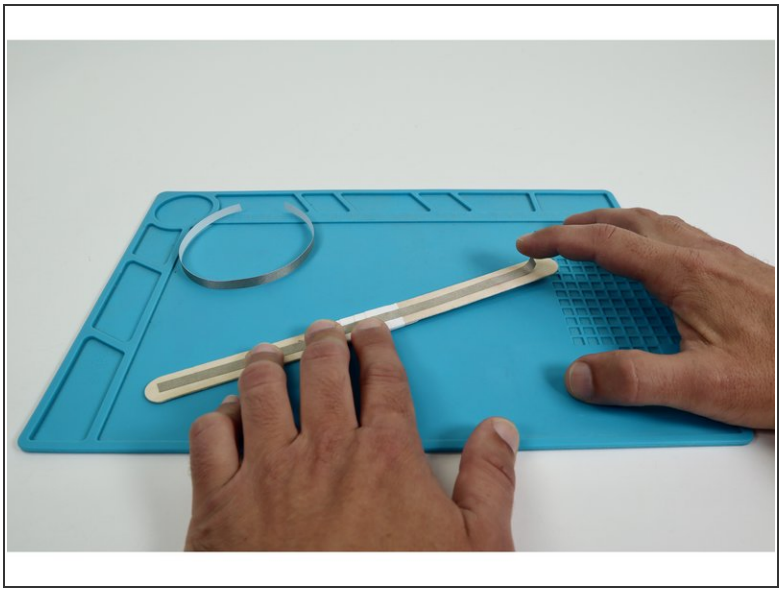
- **Cut a small length of Maker Tape and create a loop "sticky side out".**
- **Place that tape loop** atop the center of the taped area that is now atop the Long LED Legs.

Step 7 — Prepare Wand Handle Elements

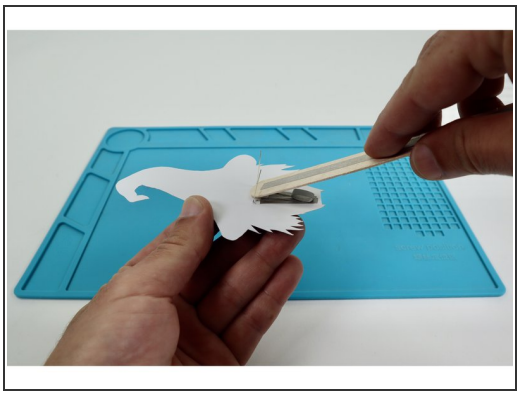
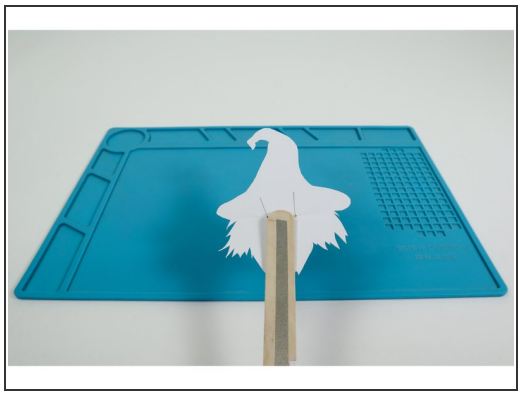
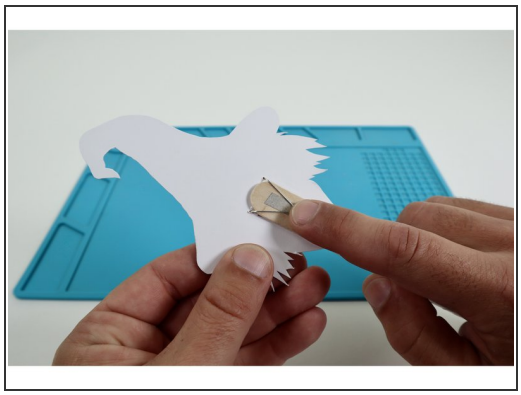
- **Use masking tape and join your two jumbo craft sticks** to effectively create one long handle.
- **Measure and cut two separate Maker Tape pieces** that are approximately the length of the wand handle you created.

Step 8 — Place Tape Paths for Wand Handle



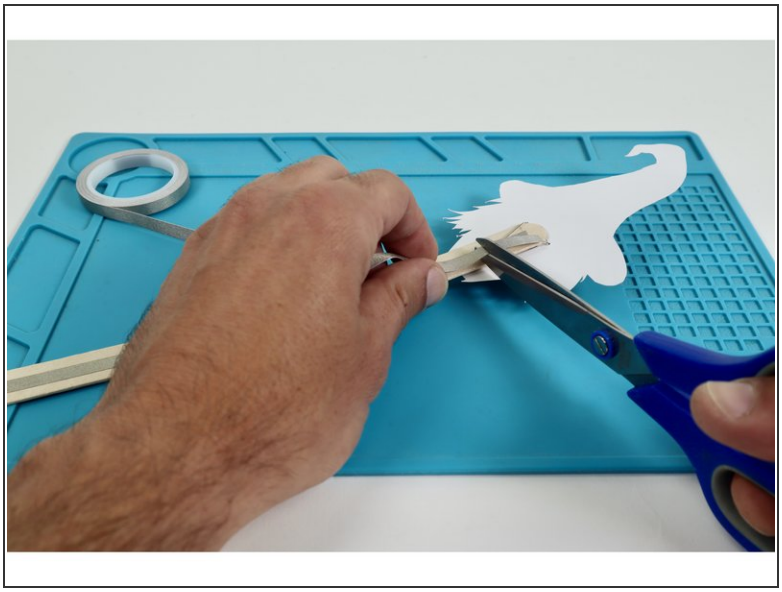
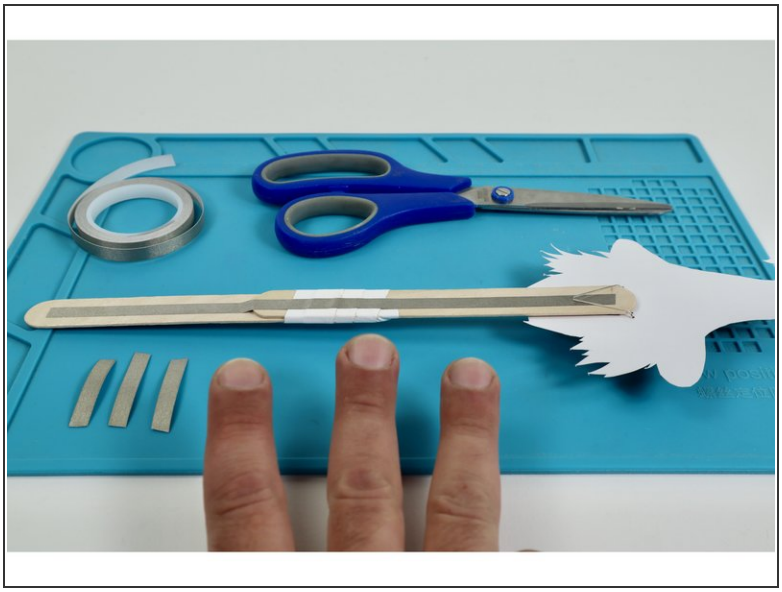

- **Place each of the two long Maker Tape pieces** so they run end-to-end down the middle of each side of the wand handle.

Step 9 — Seat the Handle; Fold Short LED legs

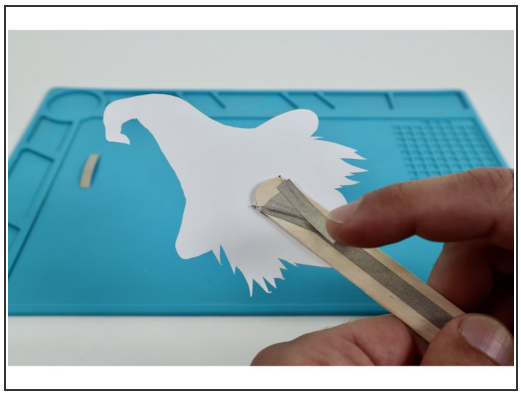
- **Seat one end of the wand handle** between the two outer LED legs and press into place so that the Maker Tape Loop contacts the downward-facing path of the wand handle.
- **Fold the outer (short) LED legs down flat against the upward-facing side of the wand handle in a slight "V".**
- These remaining two LED legs **should now be very near to the upward-facing Maker Tape path that runs the length of the wand handle.**

Step 10 — Prepare Maker Tape Paths

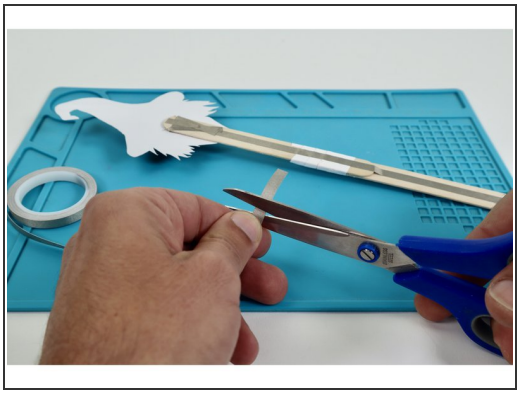
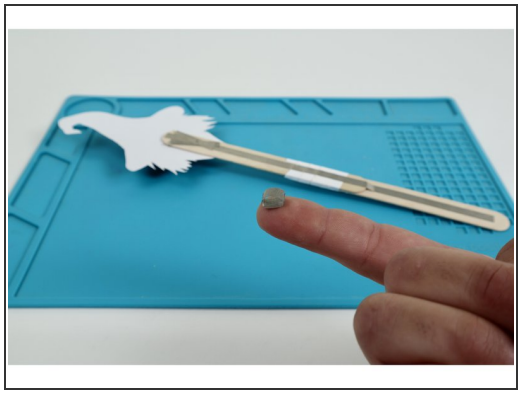
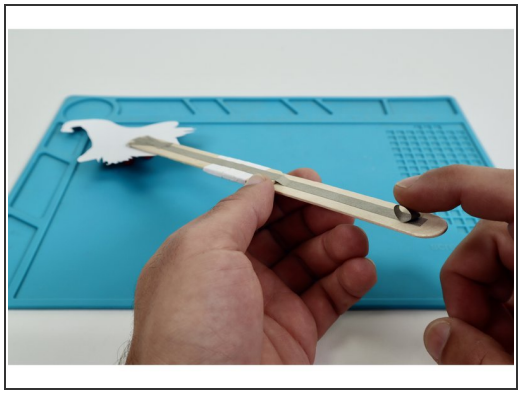
- **Measure and cut three pieces of Maker Tape** that are approximately the same length as the Short LED Legs.

Step 11 — Connect and Secure Remaining LED Legs


- **Using two of your three Maker Tape pieces, stick one atop each of the two LED legs bent flat in the previous step.** Press them into contact with the upward-facing long handle path.
- **Stick the remaining Maker Tape path down as shown in photo three.**

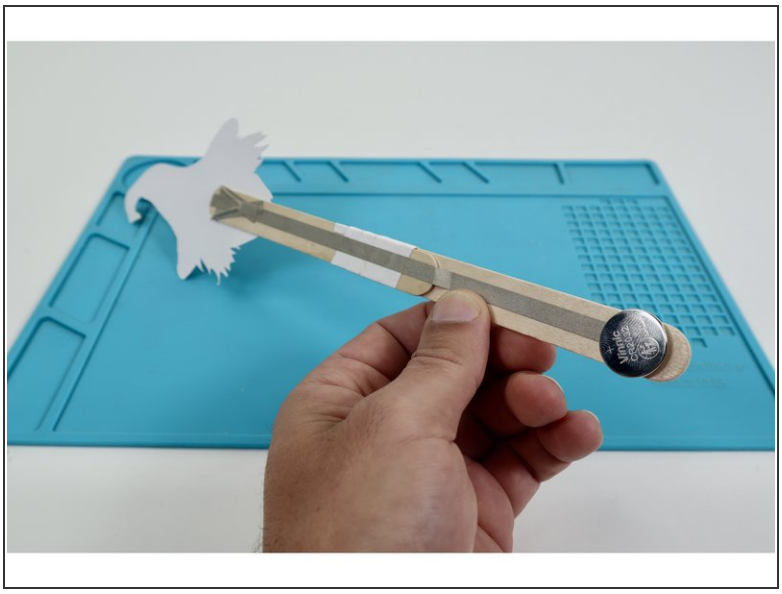
Step 12 — Prepare the Battery Install Area

- **Cut a piece of Maker Tape and make one final sticky-side-out Maker Tape Loop.**
- **Stick that tape loop in place** atop the far end of the long path from the previous step as shown.

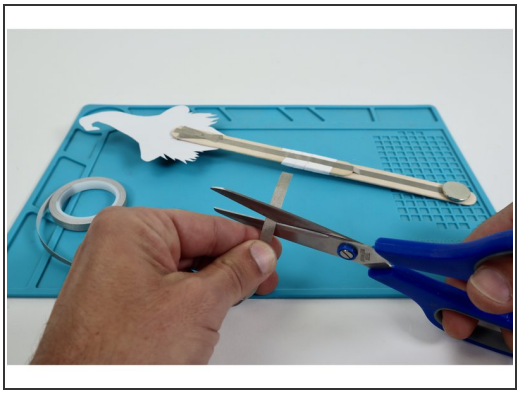
Step 13 — Install the Battery

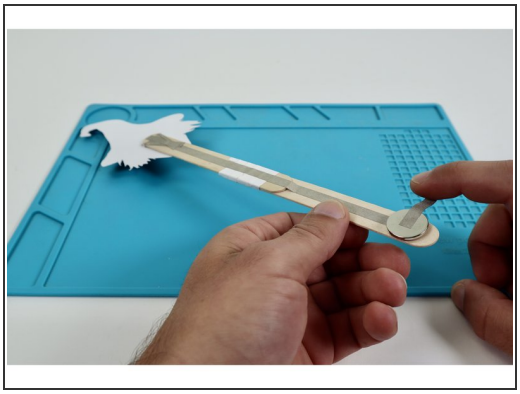


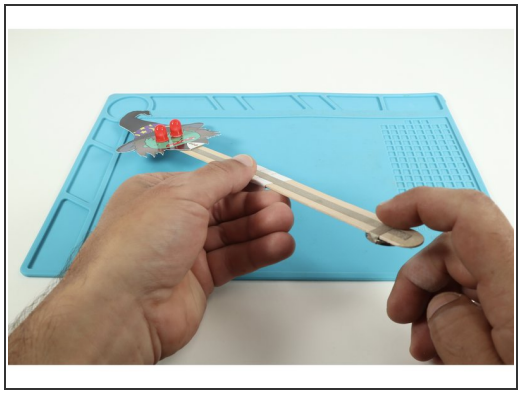


- **Begin the battery installation** by sticking the CR2032 battery atop the tape loop with the positive (+) side facing UP.
- **Note:** At this point, the LEDs should still be dark/off.

Step 14 — Complete the Battery Install



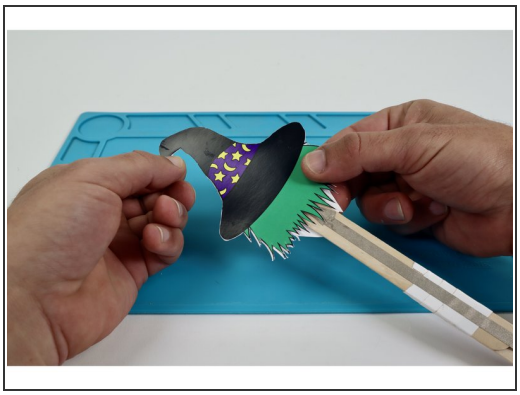




- **Finish installing the battery and turn the LEDs on.** To do this, measure, cut, peel, and stick a piece of Maker Tape that can reach from the top of the battery around to the path on the opposite side of the wand handle.
- **Note:** Once this connection is made, your witch's eyes should turn on.

Step 15 — Seal the Deal







- **Use some glue to stick the back panel in place as shown to cover the circuitry.**
- Your witch wand is now ready to light up the night and cast all the spells!