Replacing the Cutter Blade

This article will help walk you through the process of replacing the cutter blade in your unit.

Written By: Mosaic Support




© 2024

INTRODUCTION

After extended use with Palette+, the blade can dull due to extensive use. This article will help walk you through the process of replacing the cutter blade in your unit.

© 2024


Step 1 — Removing Blade

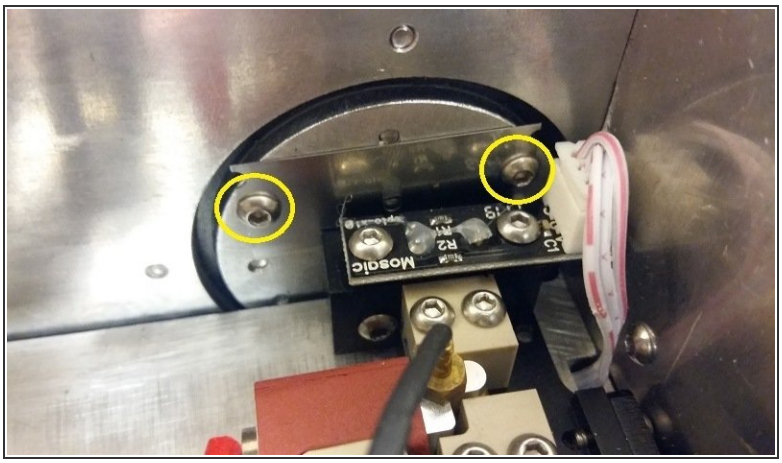



- To remove the blade, you will need to remove the two highlighted screws.
- Remove the left screw first as this is the easiest to access. Using a screwdriver or hex key, turn counter-clockwise to remove this screw.

Step 2 — Replace Blade

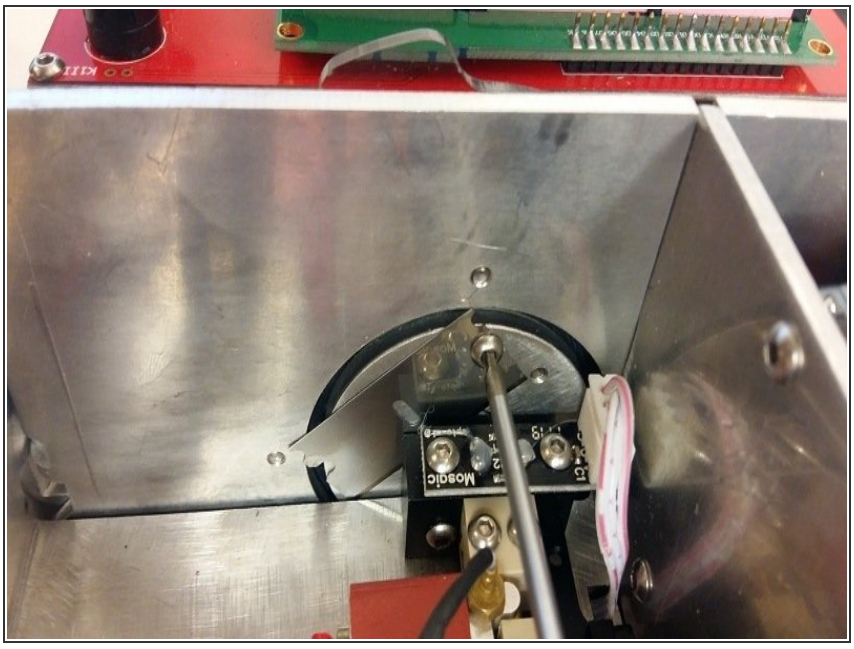

- Once the first screw is removed, you'll be able to move the cutter into a position which will allow easier access to the second screw. Remove this screw while pressing against the blade to avoid it from falling.
- Once removed, install the new blade and re-tighten the screws.

If you have any additional questions, please send us a message at support@mosaicmfg.com