

# CELLPHONESANDBOX

## Manual 01 - Loudspeaker

Written By: James Linder




## Step 1 — Removal 1 - Battery Cover




- Power down the device.
- Remove the battery cover and place it in ZONE I.

## Step 2 — Removal 2 - Loudspeaker

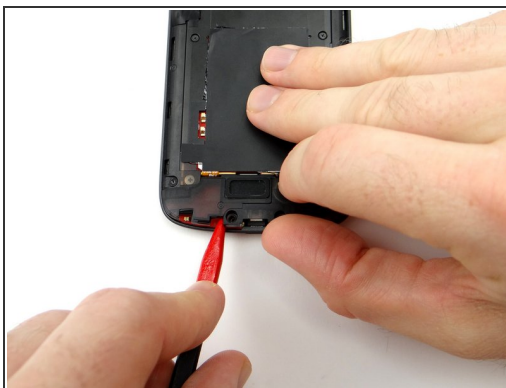

- Remove two 3.6 mm T4 Torx screws. Place them in SLOT 1.
- Use the pointed end of the spudger to pry up the speaker assembly. Remove it with your fingers and place it in ZONE I (below battery cover).

### Step 3 — Replacement 2 - Loudspeaker

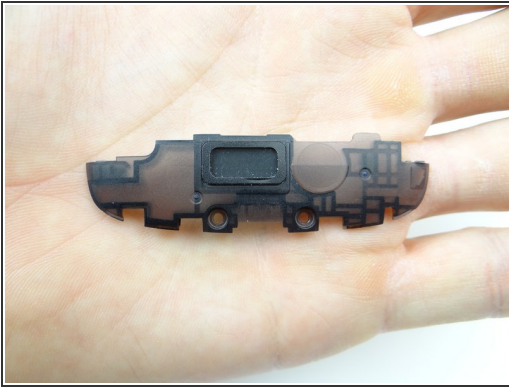

- Replace speaker assembly from ZONE I:
  - Position top edge first then push speaker assembly fully into place.
  - Replace two 3.6 mm T4 Torx screws from SLOT 1 to secure speaker assembly.

### Step 4 — Replacement 1 - Battery Cover



- Seat battery cover from ZONE I.
- Power up and test device.