




CH6-A - Four Buttons Fade

Connect four pushbuttons to a Bit Board and control an LED with code.

Written By: Pete Prodoehl

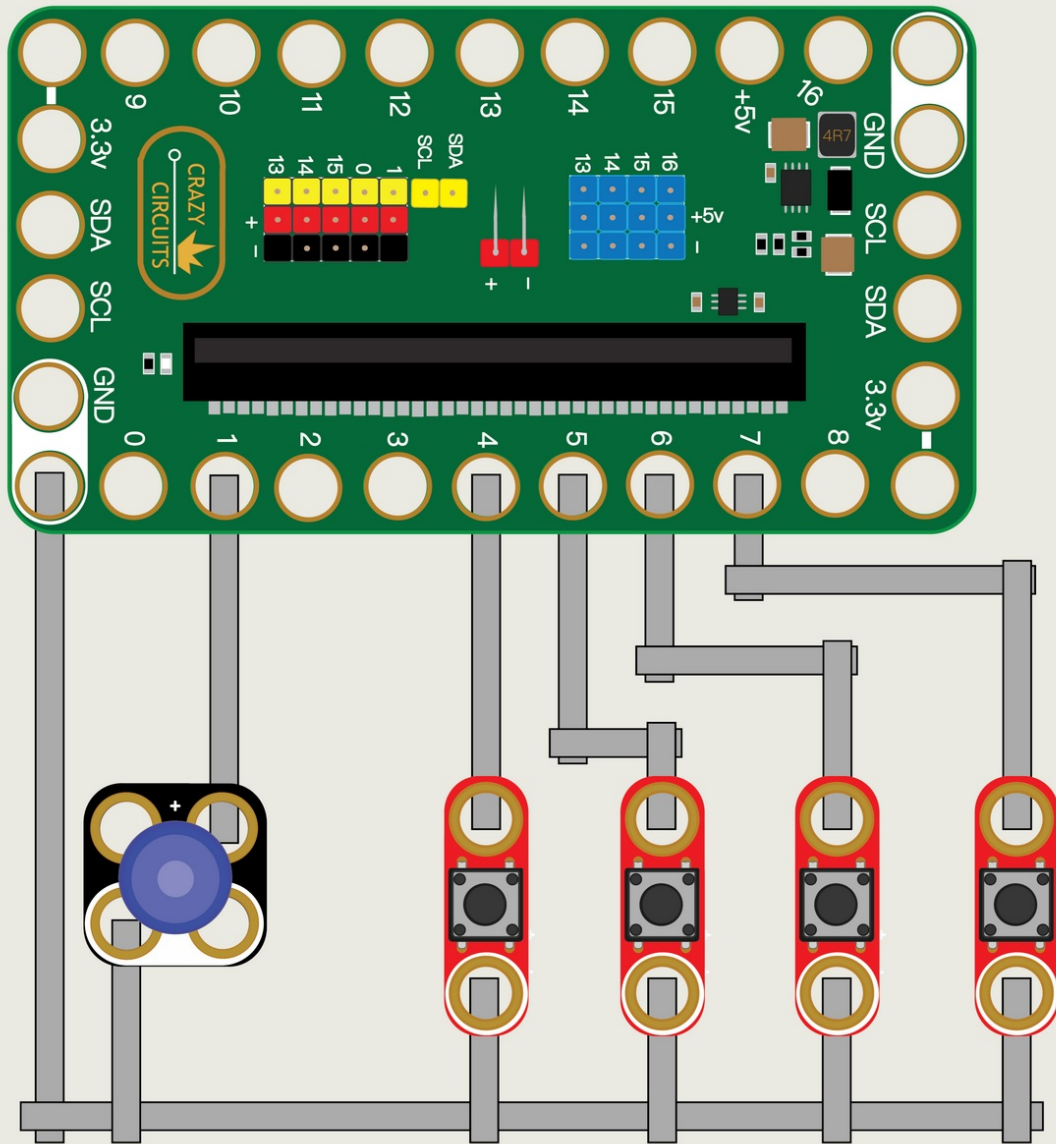

INTRODUCTION

Connect four pushbuttons to a Bit Board and control an LED with code.

We'll explore how we can use four pushbuttons as inputs for the micro:bit



TOOLS:



- [Computer](#) (1)
- [Scissors](#) (1)



PARTS:


- [Crazy Circuits Bit Board](#) (1)
- [micro:bit](#) (1)
- [Maker Tape](#) (1)
1/8" Wide
- [Standard Pushbutton Chip](#) (4)
- [Crazy Circuits LED Chip](#) (1)

Step 1 — Connect the Buttons (and LED)

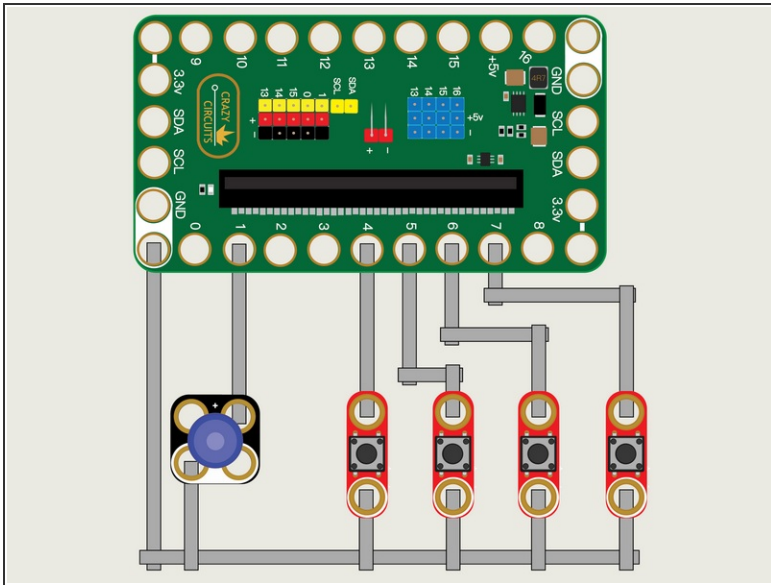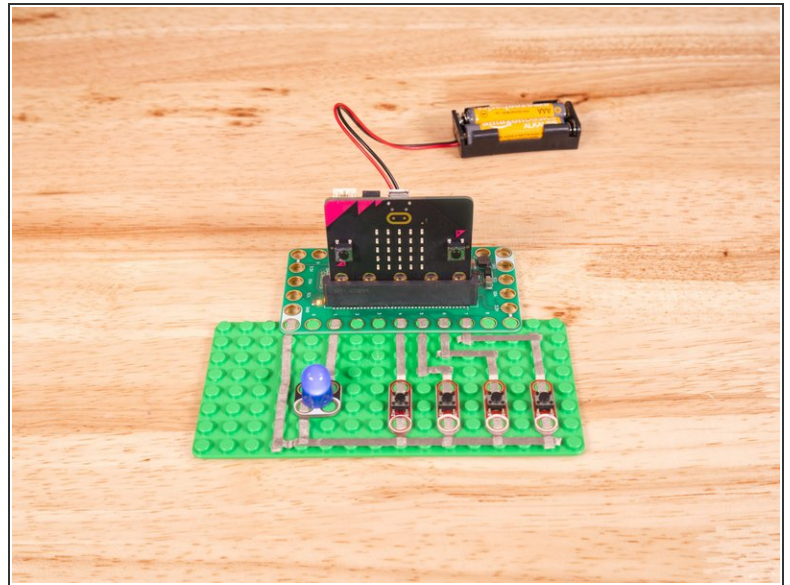


- We'll use **Maker Tape** to connect the four Buttons and the LED to the Bit Board on a LEGO baseplate.
- We'll connect our **LED** to **Pin 1** and one of our **Buttons** to **Pin 4** and the others to **Pin 5**, **Pin 6**, and **Pin 7**, respectively.
- And of course we'll connect the **Ground** (GND) sides of each component to **Ground** on the Bit Board.
- ☑ You'll notice the **Ground** on the Bit Board (as well as the LED and other Crazy Circuits components we'll use) is color coded **White**.
- ☑ While the LED has **Polarity** our **Button** does not. If you connect it the other way around *it will still work fine*. Not all components have **Polarity**.

Step 2 — Load the Code

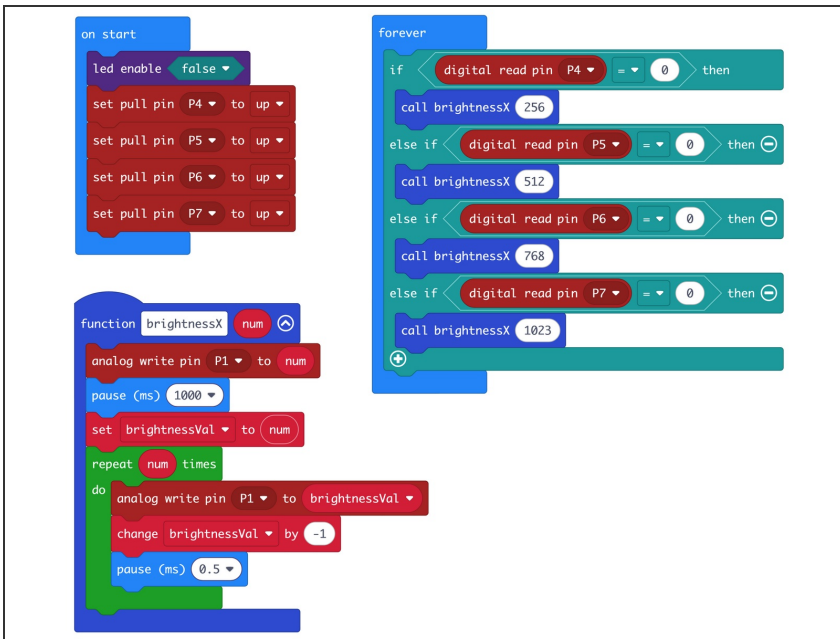


- If you've never used a micro:bit before you'll want to check out this guide: [Bit Board V2 Setup and Use](https://makecode.microbit.org/_F0L0iCUrU...)
- We're going to load the following code for our **Four Buttons Fade** program:
https://makecode.microbit.org/_F0L0iCUrU...
- This code uses a **function** which will run when a button is pressed. A different **parameter** will be sent depending on which button you press.
- Our function brightnessX accepts one parameter, which tells the function the brightness level it should set the LED. (Remember, we can choose a value between **0** and **1023**.)
- The function will turn on the LED at the determined brightness, wait one second (1000 milliseconds) and then start a repeat loop to decrease the brightness, making the LED fade down.

Step 3 — Test it Out!

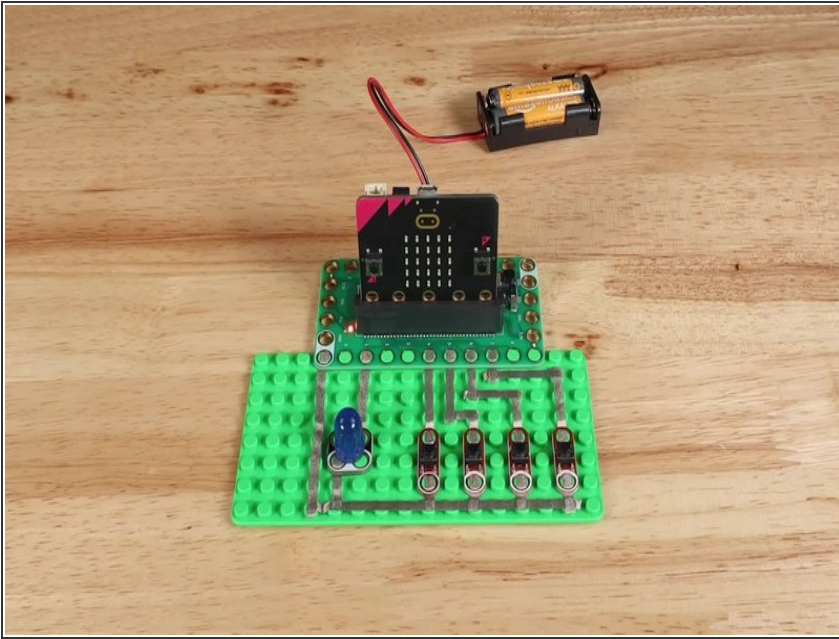

- Once the code is loaded it should start running immediately.
- ① You can power the micro:bit via the USB cable you used to load the code or you can use a battery pack plugged into the Bit Board.
- Press a button and you'll see the LED turn on for a second, and then start to dim. Try the different buttons for different initial brightness values.

Step 4 — Follow Along

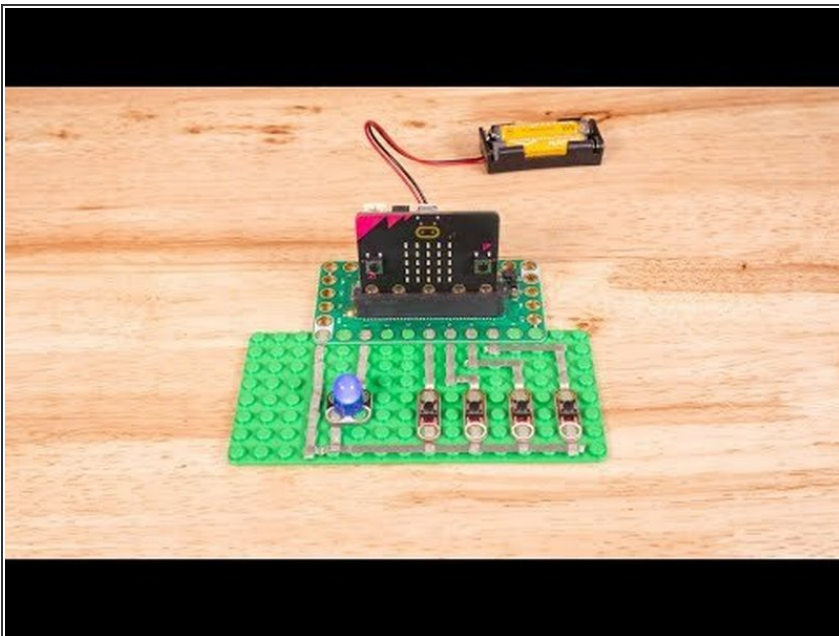

- Follow along with our recorded Live Stream!
- ① You can watch the full video of us walking through this project, along with explaining and exploring the code:
<https://www.youtube.com/watch?v=Huqyi9A8...>