
Belt and Disk Sander

Written By: Sarah Rosalinde Schaupp




Step 1 — PPE

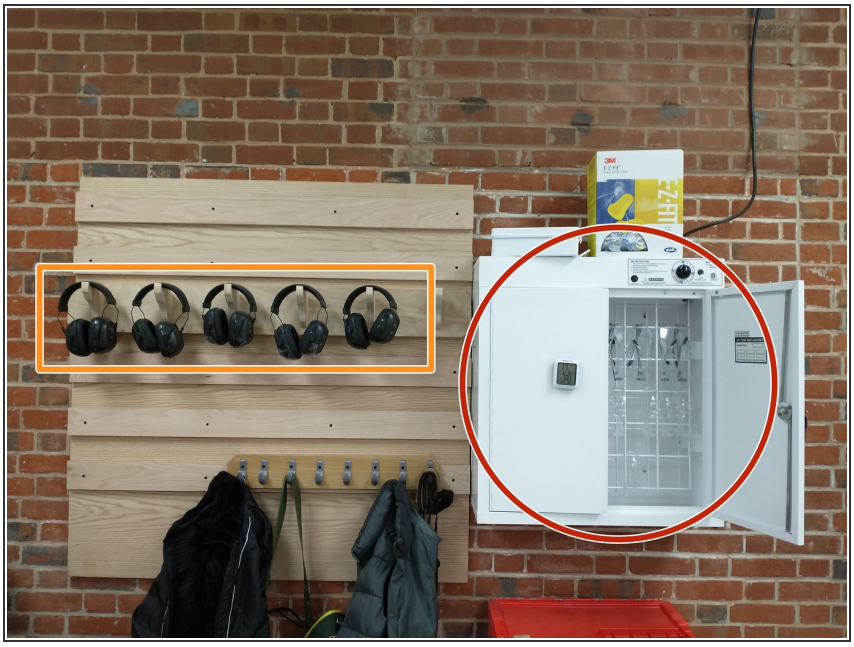

- Safety goggles are required to work in the woodshop.
- Ear protection is recommended, but not required.
- Long pants and short sleeves are required.
- ⚠ NO GLOVES - they can get caught in the machinery
- Closed toed shoes are required
- Tie back long hair

Step 2 — The Belt Sander

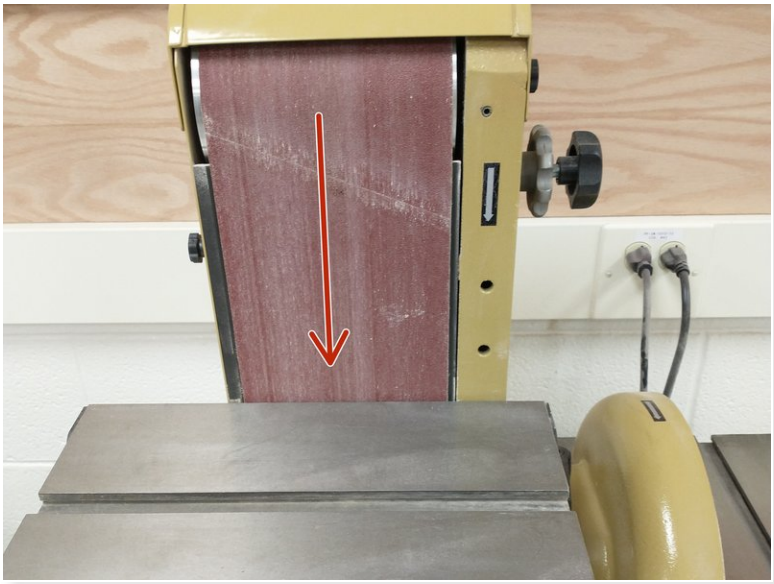



- Hold the piece you are sanding against the fence. This will prevent it from being dragged along with the belt.


  ⓘ The belt always moves towards the fence.


- Push the start button before you touch your piece to the belt.

  ⓘ The same start button starts both the belt and disk sander.

© 2022

Step 3 — The Disk Sander

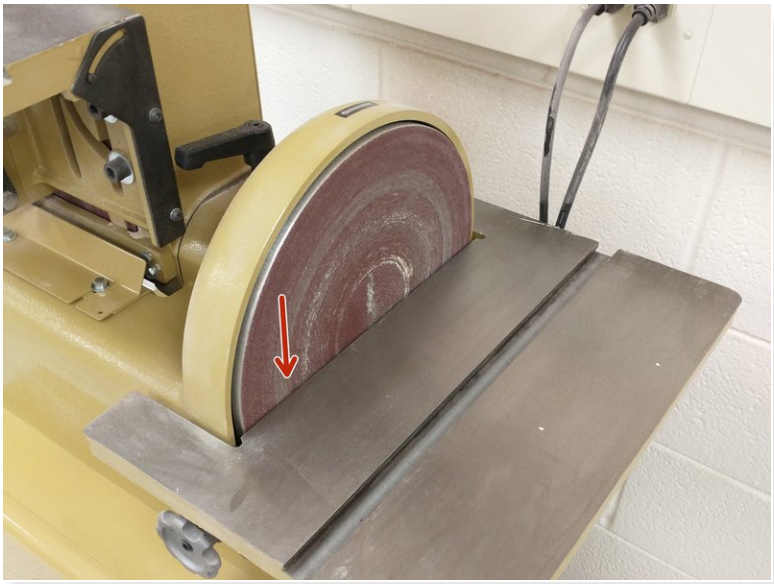

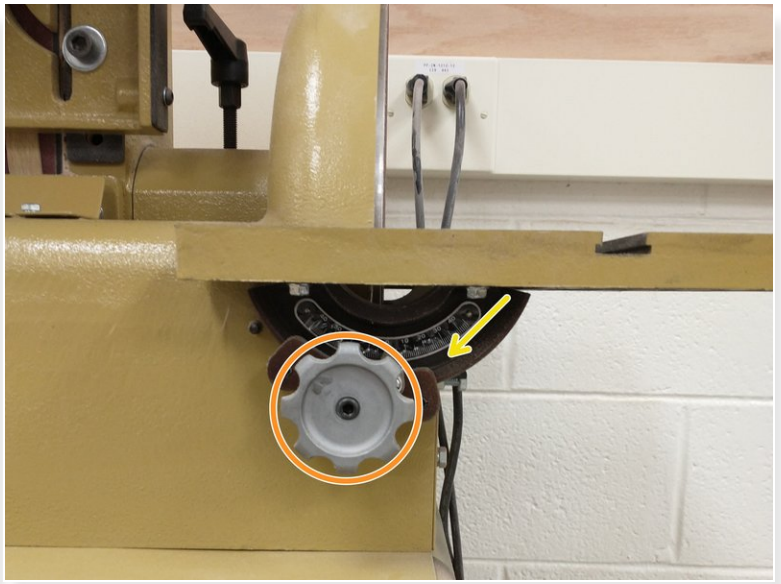

- The belt sander always spins counterclockwise, so hold your piece against the left side of the fence.
- Loosen the locking knob to angle the fence. This allows you to sand at an angle.