Marwis Meteorological Sensor

Written By: Jason Fox



© 2024 - Uncontrolled If Printed

— Requirements





⚠ Marwis cable connections must be soldered and insulated with heat shrink.


- A single 120 ohm termination resistor is required.

© 2024 - Uncontrolled If Printed

— Installation

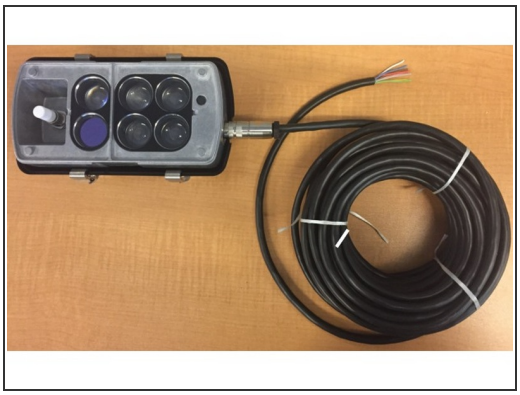

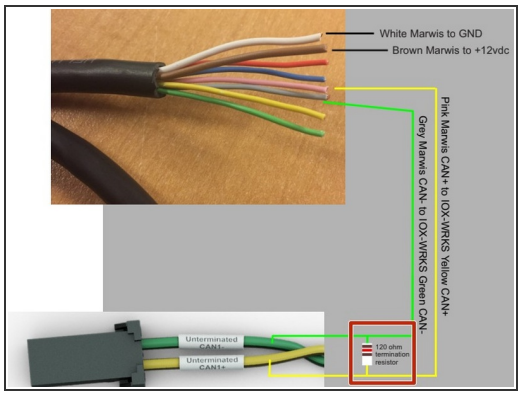

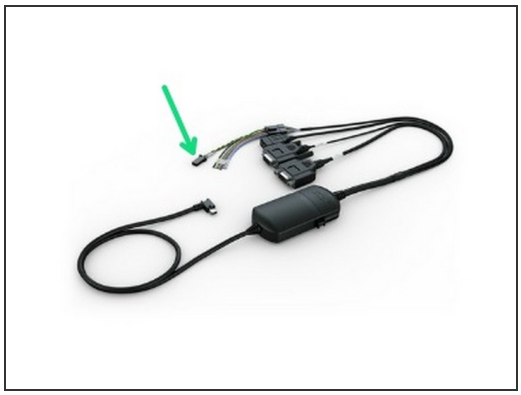

- White Marwis to GND
- Brown Marwis to +12vdc ignition
- Pink Marwis CAN+ to IOX-WRKS Yellow CAN+
- Grey Marwis CAN- to IOX-WRKS Green CAN-
- Be certain to install120ohm Termination Resistor between the CAN+ and CAN- connections as shown.

There will be nothing connected to the Red, Blue, Yellow, or Green leads on the Marwis cable.

© 2024 - Uncontrolled If Printed