
Miller Edge Light Curtain Wiring for ICS Control Panel

Miller Edge Light Curtain

Written By: Todd Lucas



© 2026

Step 1 — TRANSMITTER:


- RED – 24VDC
- BLACK – 0VDC

Step 2 — RECEIVER

⚠ REMOVE FACTORY (X4 TO X4.1) JUMPER TO INSTALL SAFETY DEVICE

- RED – 24VDC
- BLACK – 0VDC
- BROWN – X4.1
- ORANGE – X4

Step 3 — 2 OR MORE LIGHT CURTAINS USED ON THE SAME DOOR

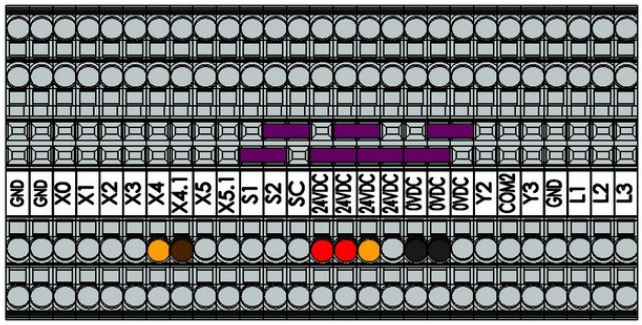

⚠ REMOVE FACTORY (24VDC TO X4.1) JUMPER TO INSTALL SECONDARY DEVICE(S).

- YELLOW WIRES – NOT USED
- 0 VDC - BOTH BLACK WIRES
- 24 VDC - (1) ORANGE WIRE
- 24 VDC - BOTH RED WIRES
- X4 - (1) ORANGE WIRE
- X4.1 - BOTH BROWN WIRES