
Connecting your Mini PC and Monitors

Written By: Brendon Welch



Step 1 — Connecting your Mini PC and Monitors



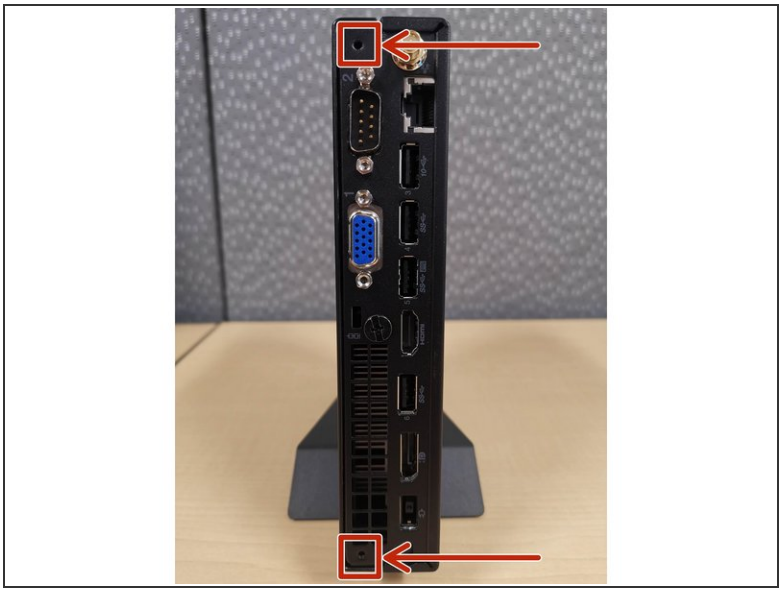


ⓘ ***Slide your Mini-PC into the Vesa Mount.***

⚠ **The screw holes on the back of your Mini-PC will line up with the mount.**


- **Use the included Screws to secure the back of the Mini-PC to the Vesa Mount**

Step 2

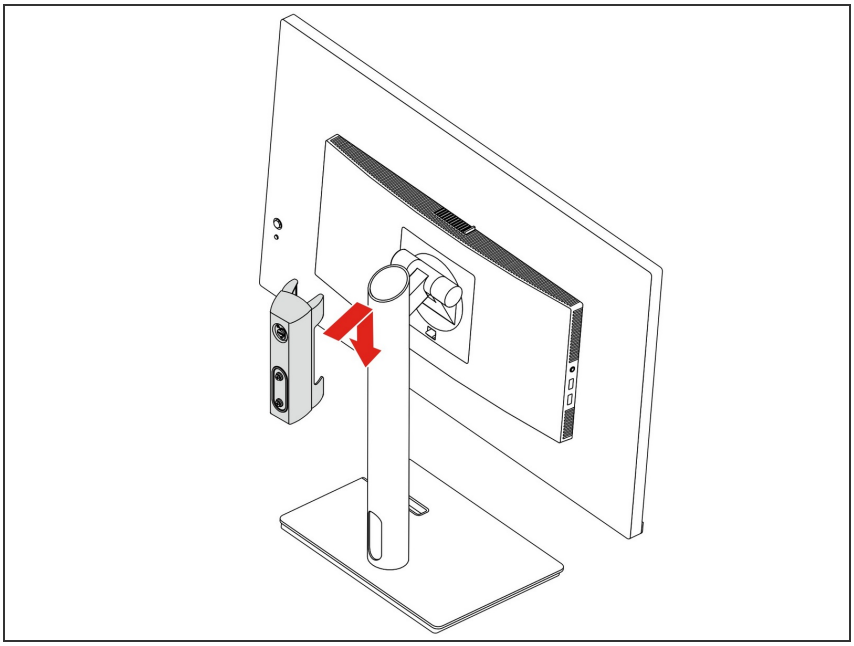

- **Slide the mounting bracket onto the top of the monitor post**

Step 3

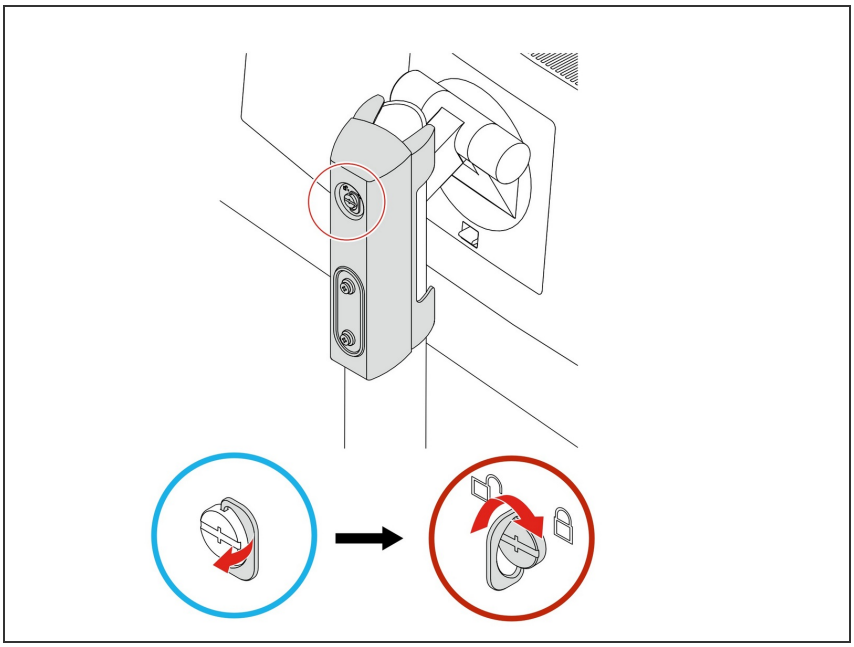


- **Lift the screw handle**

ⓘ **To tighten the screw:**


- **Turn the screw clockwise**

Step 4

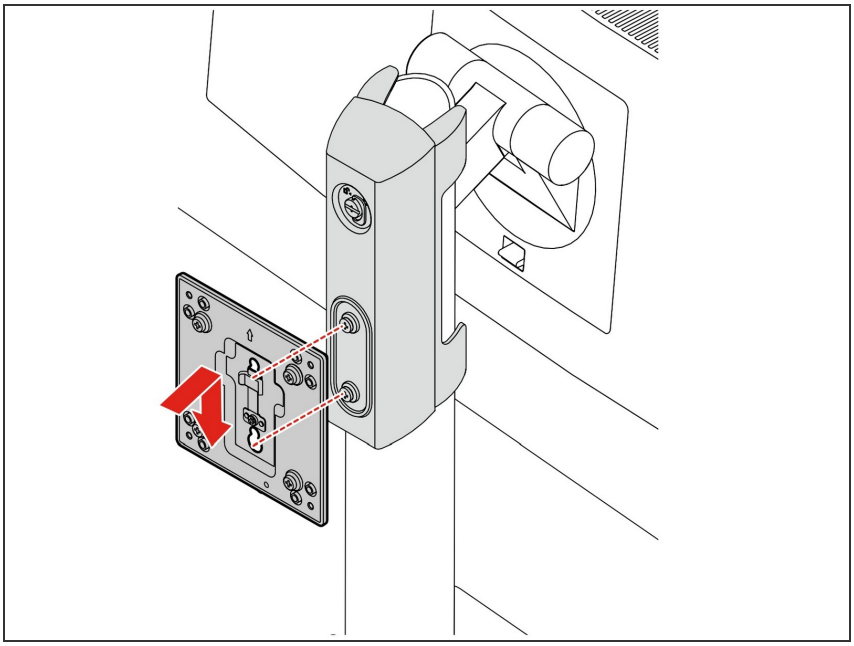

- **Slide the mounting bracket onto the mount**


Step 5

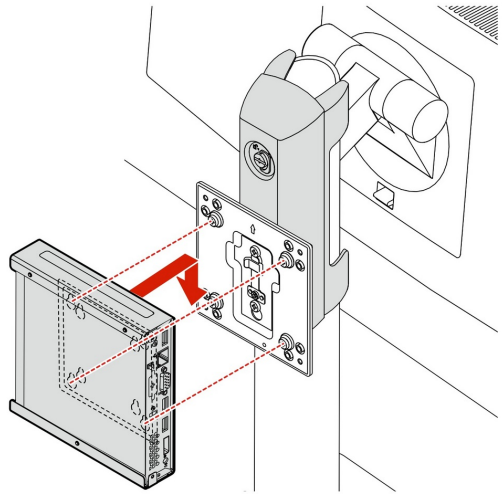

ThinkCentre Tiny
ThinkCentre Tiny VESA mount


- **Line up the screws on the Vesa mount and the holes on the Mini-PC mount.**
- **Slide the Mini-PC onto the Vesa mount.**

Step 6

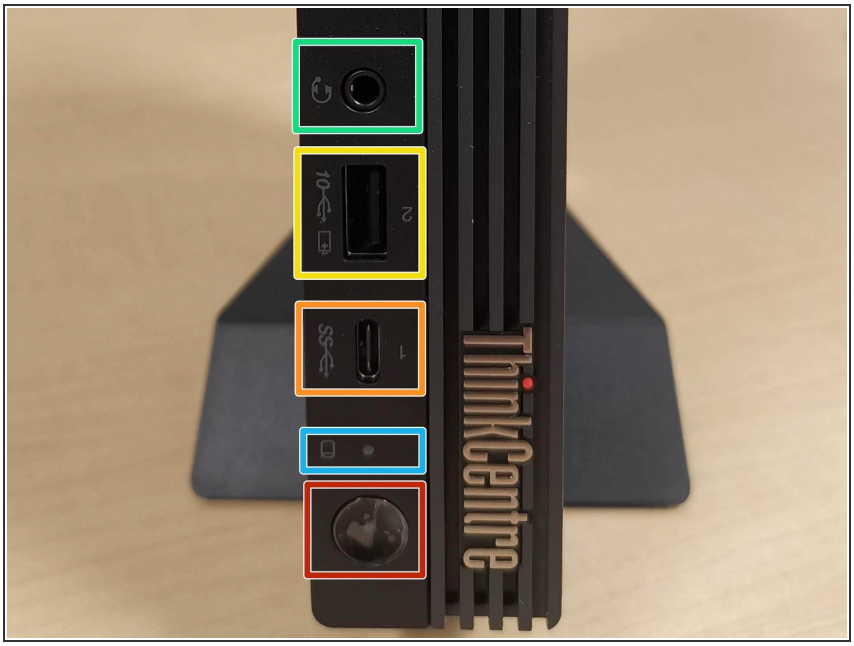

- **Front Panel Overview:**
- **Headphones/Headset**
- **USB 3.0** (Highspeed)
- **USB 3.0 Type C** (Highspeed)
- **Hard Drive Activity Light**
- **Power Button**

Step 7

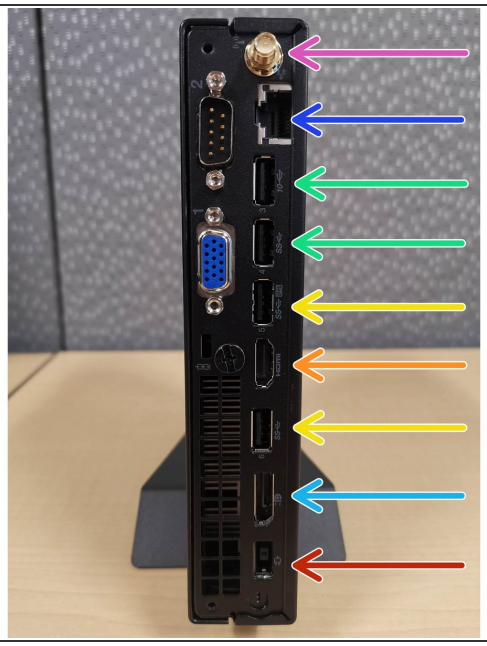

ⓘ **Rear Panel Overview:**

- **Wi-Fi Antenna Jack**
- **Ethernet Port**
- **USB 2.0**
- **USB 3.0** (Highspeed)
- **HDMI**
- **DisplayPort**
- **Power Supply**


Step 8



⚠ **Do not force any cables into place.**

- Plug your **Mouse into the top USB port**

Step 9

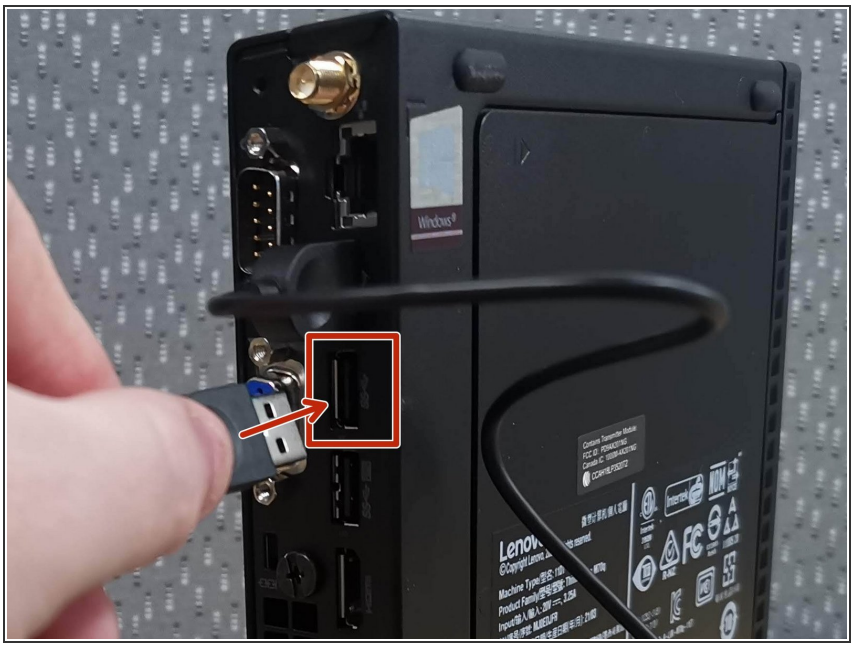

- Plug your **Keyboard into the USB port below the mouse**



Step 10





- **Each of your monitors will come with a Display Port cable and an USB 3.0 cable.**
- ***A DisplayPort to HDMI cable is provided separately. If you did not receive one, contact your hiring manager.***
- Unwrap the **Display Port and USB 3.0 cables**
- **DisplayPort to HDMI cable**

Step 11

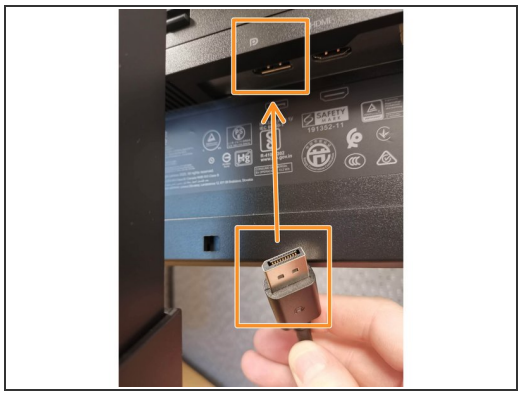
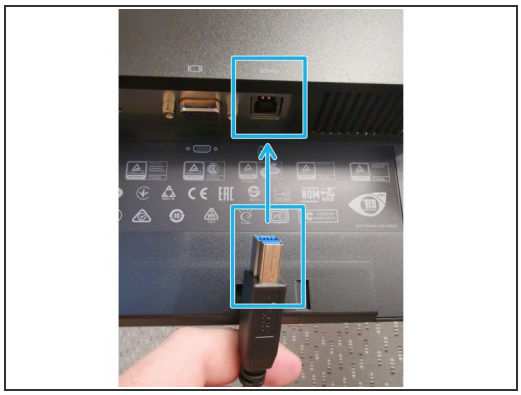




⚠ **Do not force any cables into place.**

⚠ **Your Main Monitor (1st Monitor) has a camera.**

- Connect the **DisplayPort to HDMI cable to the back of the 1st monitor**
- Connect the **USB 3.0 cable to the back of the monitor**
- Connect the **Power cable to the back of the monitor**

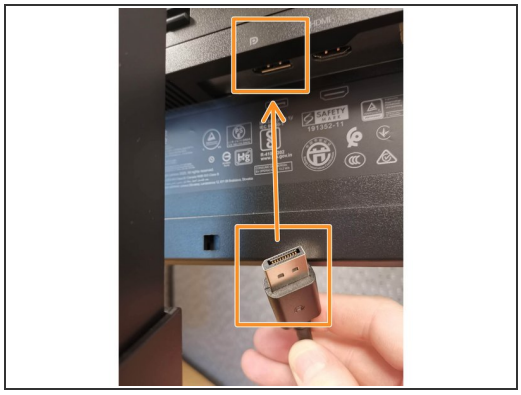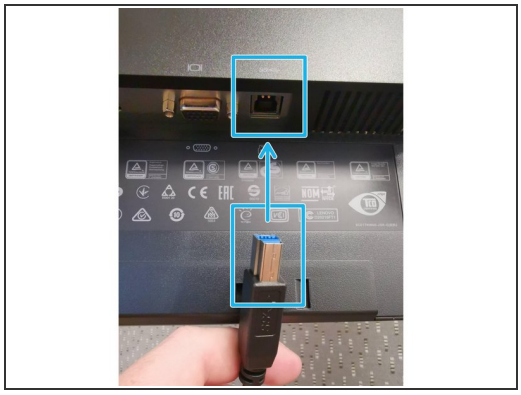
Step 12






⚠ **Do not force any cables into place.**

- Connect the **Display Port cable to the back of the 2nd monitor**
- Connect the **USB 3.0 cable to the back of the monitor**
- Connect the **Power cable to the back of the monitor**

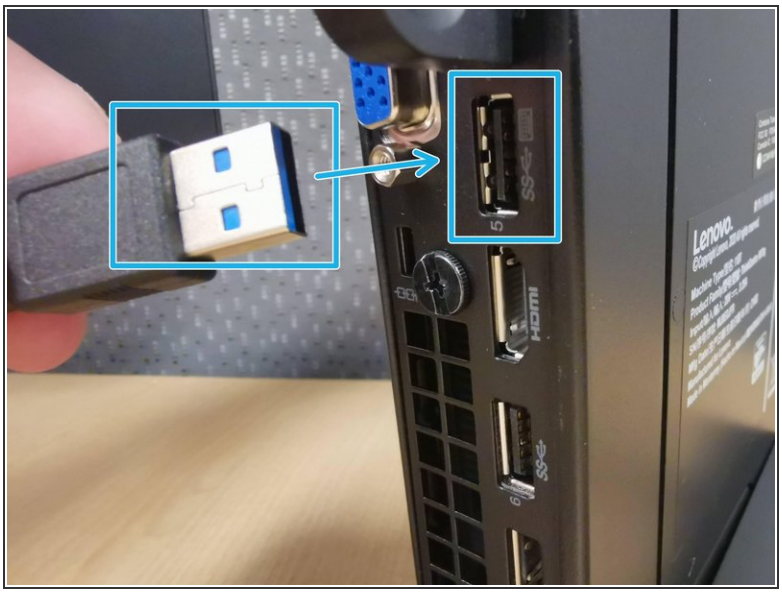Step 13

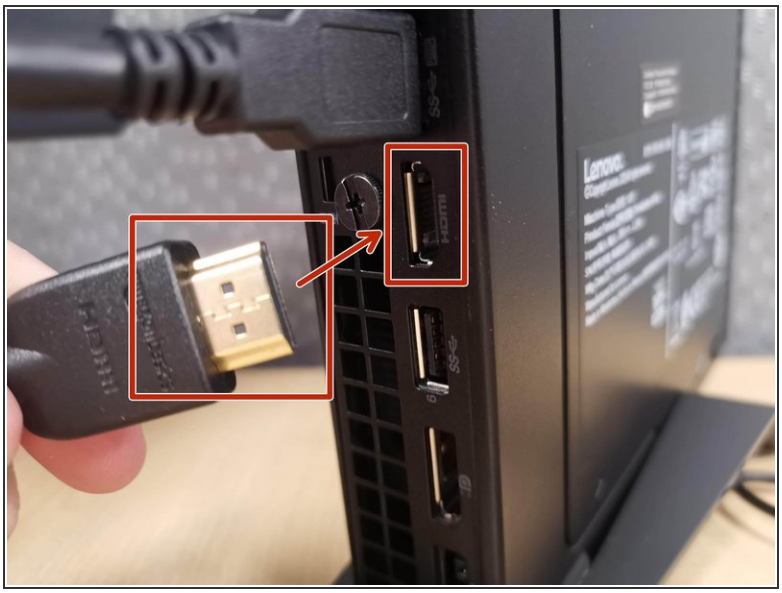





⚠ **Do not force any cables into place.**

The primary monitor uses the DisplayPort to HDMI connection.

- Connect the **USB 3.0 cable to the Mini PC**
- Connect the **HDMI end to the Mini PC**

Step 14

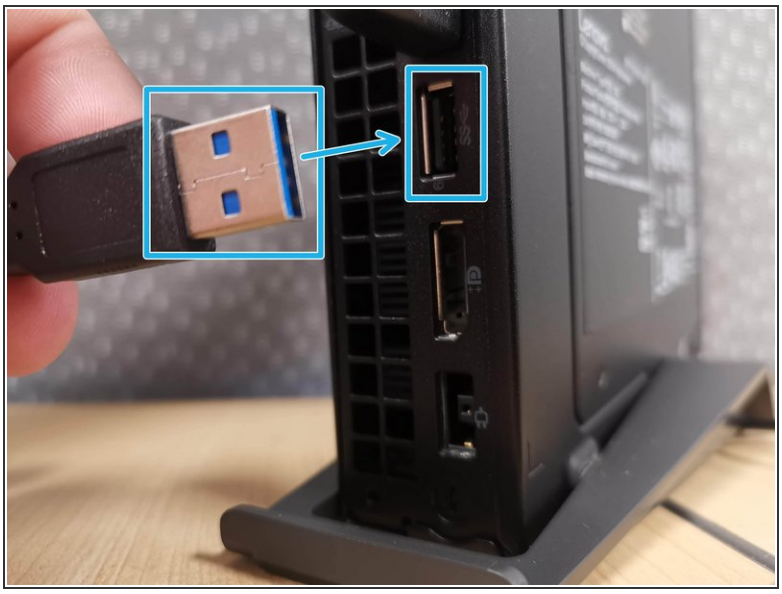

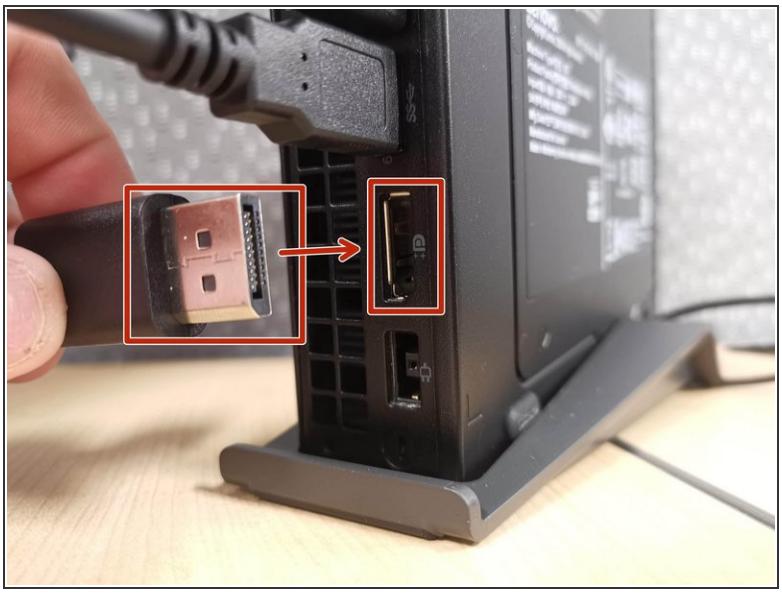


⚠ **Do not force any cables into place.**

The secondary monitor uses the Display Port connection.

- Connect the **USB 3.0 cable to the Mini PC**
- Connect the **Display Port cable to the Mini PC**

Step 15

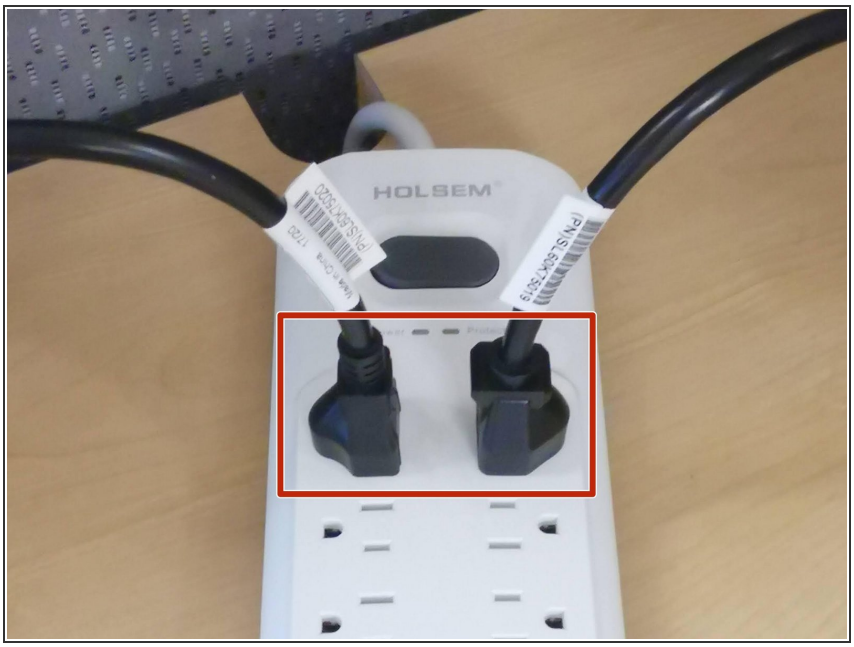


⚠ **Make sure your surge protector is turned OFF.**

- Connect the **monitors' power cable to the surge protector**

Step 16



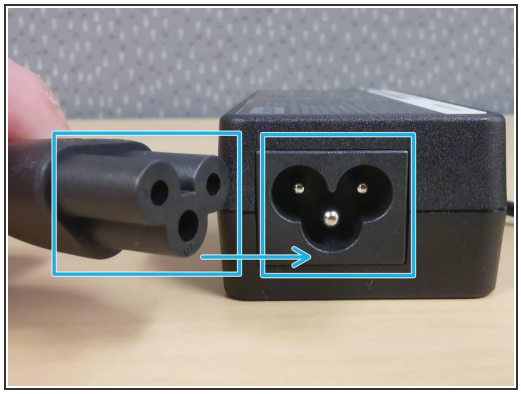




Assemble the Mini PC power supply:

- Connect the **AC cable to the Mini PC power supply**
- Connect the **AC cable to the surge protector**


Step 17

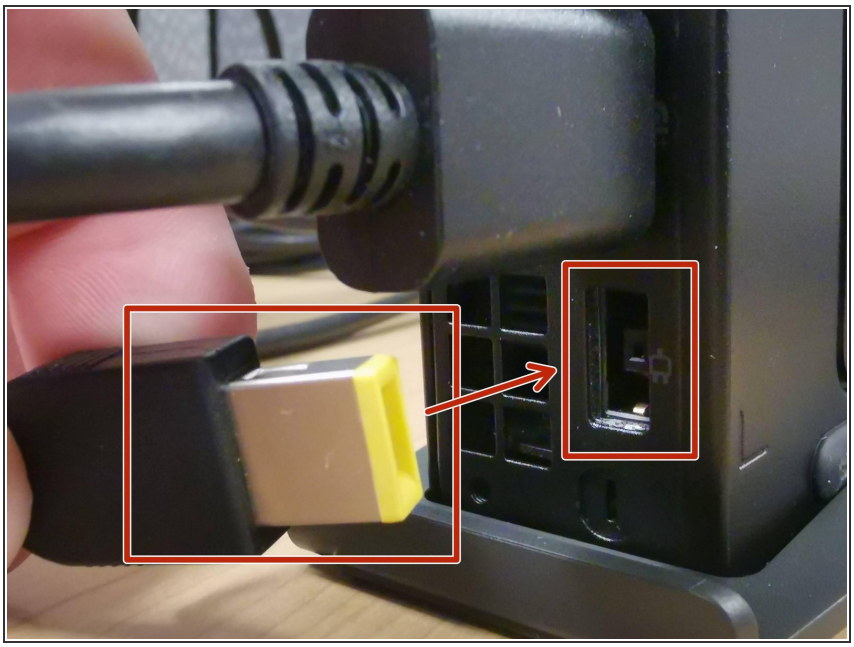


⚠ **Do not force any cables into place.**

- **Connect the Mini PC power supply**

Step 18

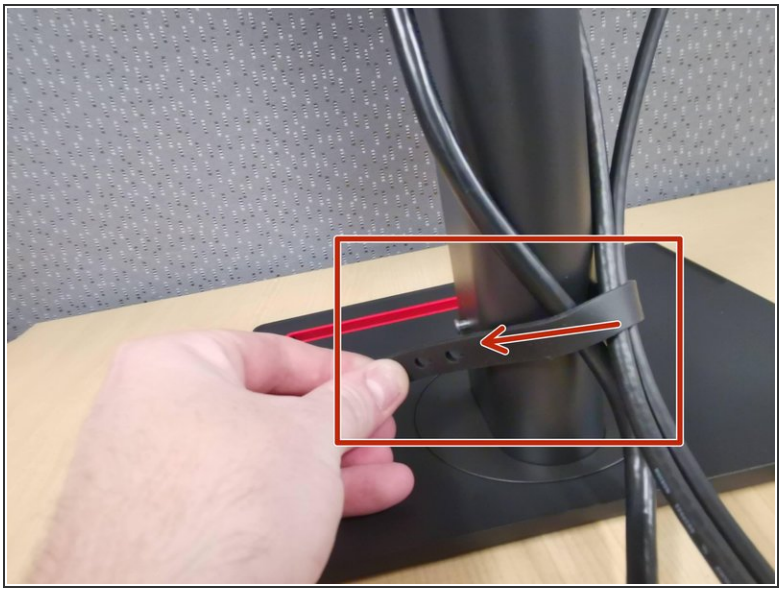


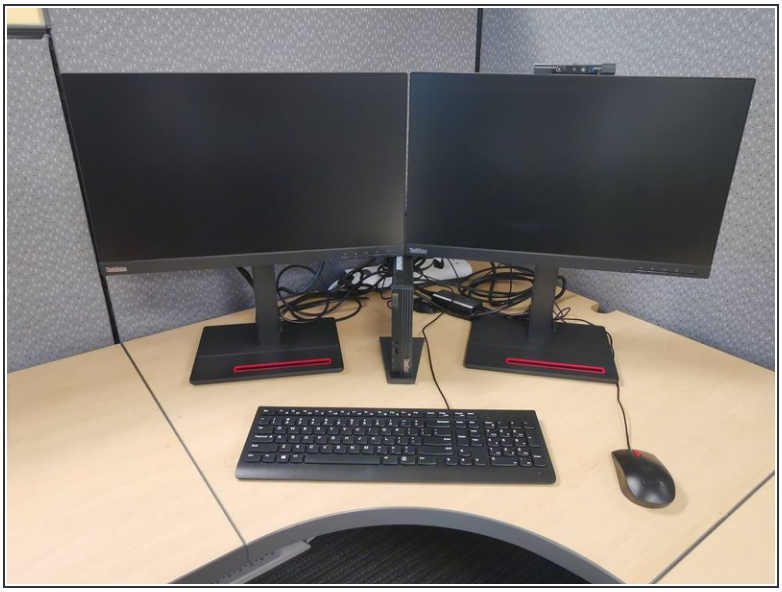



- **Organize your cables** using the strap at the base of the monitor arm

Arrange your monitors, PC, keyboard and mouse into a comfortable position.

Step 19

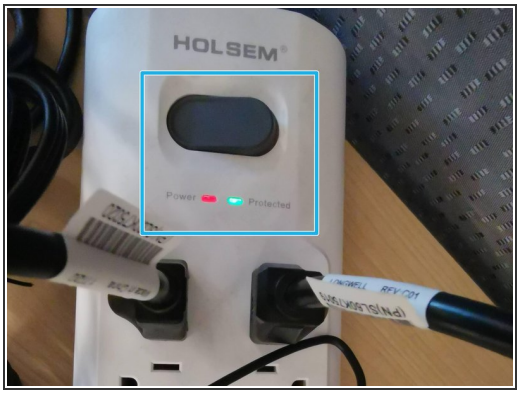

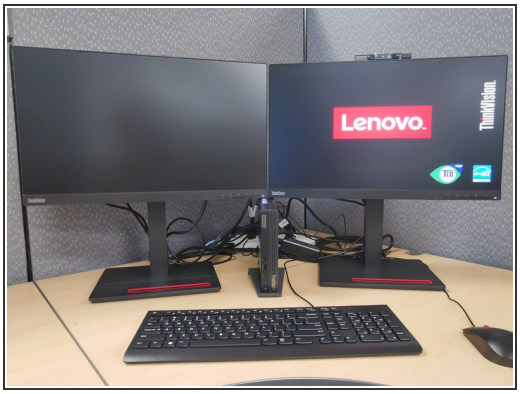

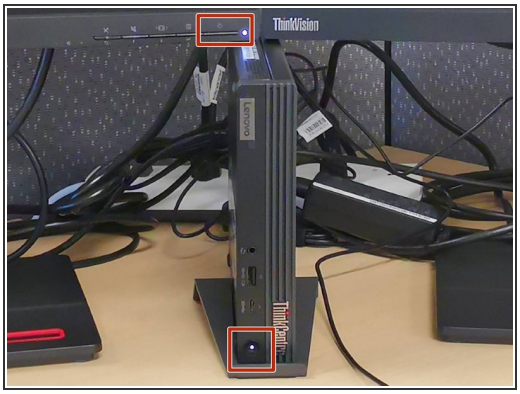

- **Turn the Surge Protector on**

ⓘ The Mini PC and monitors will turn on.

⚠ **If the Mini PC or monitors do not turn on:**

- Press **Power on the Mini PC and monitors**

CLICK HERE for the First Boot - PC Setup