



NixOS on the Framework Laptop 13

How to install NixOS on a Framework Laptop 13

Written By: Matt Hartley



INTRODUCTION

Once you have your Framework Laptop 13 set up following the [Quick Start Guide](#), you're ready to install your preferred OS. With the latest release of NixOS, everything works pretty smoothly. You can check our [Linux page](#) for additional Linux compatibility notes.


NOTE: This is a [Compatible Community Supported Linux Distribution](#). [Learn more here](#).



PARTS:



- [Storage Expansion Card](#) (1)
-

Step 1 — (From macOS) Preparing USB NixOS Installation Media

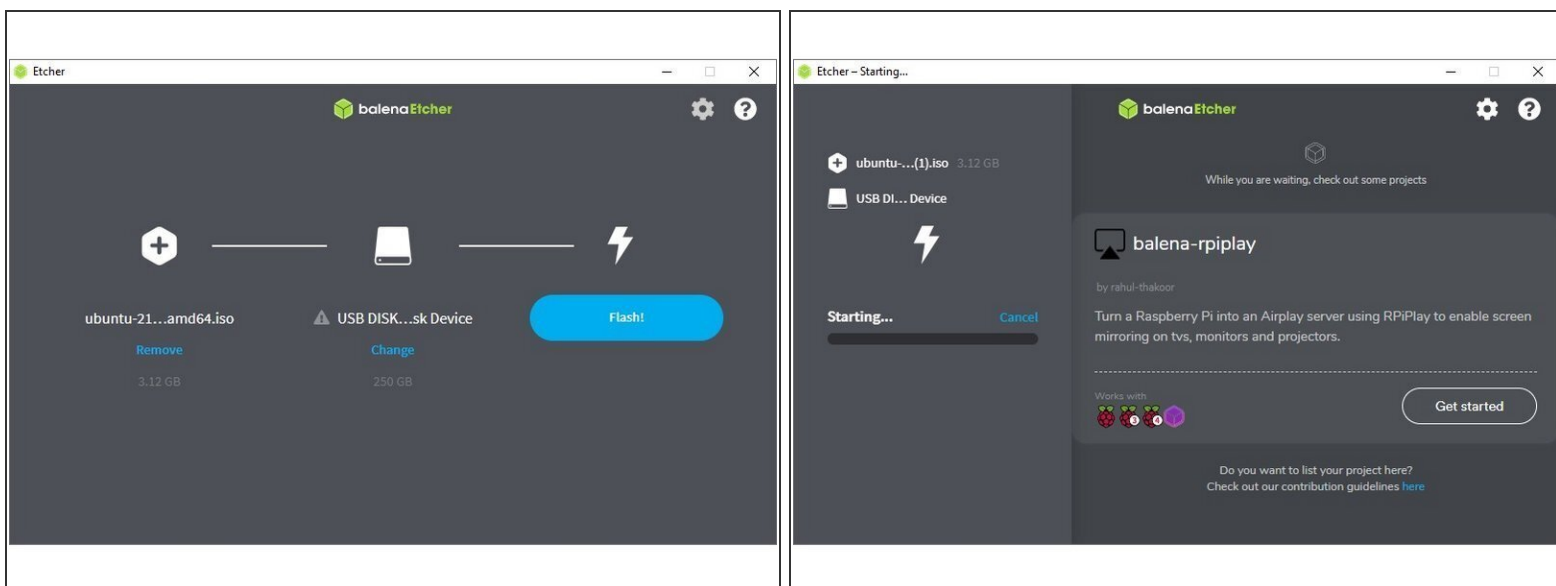


- First, [download NixOS from NixOS' website](#). NixOS has a [detailed installation guide](#) that you can follow. We'll go through the steps in this Guide assuming you have a simple installation scenario of a fresh install on a blank drive.
- Download [balenaEtcher](#) as a tool to create the USB installer from the ISO. balenaEtcher is available for MacOS. Install it.
- Launch balenaEtcher. Insert your USB drive (8GB or larger). Click on "Flash from file" and select the NixOS iso that you downloaded. Click on "Select target" and choose your USB drive. Click "Flash" and wait a minute or two for it to complete.
- Once the USB drive creation is complete, you can close balenaEtcher and eject the USB drive from your OS.

Step 2 — (From Windows) Preparing USB NixOS Installation Media

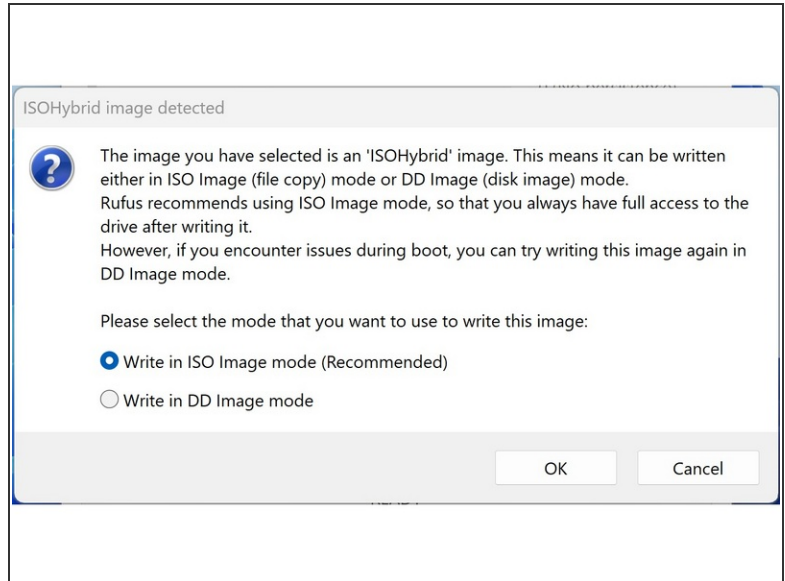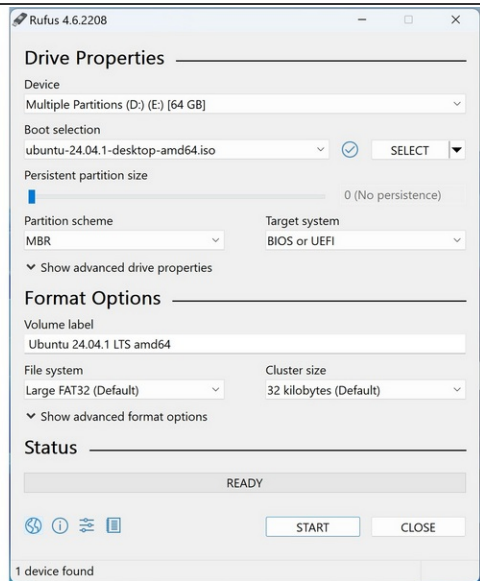

- First, [download NixOS from the NixOS website](#). NixOS has a [detailed installation guide](#) that users can follow. This Guide will walk through a basic setup that automatically uses an entire disk.
- Download [Rufus](#) as a tool to create the USB installer from the ISO. The first item in this list will be a link to install installer for the latest version. Install Rufus using this.
- Open Rufus, from the Device drop-down, select the USB flash drive stick.
 - ⚠ In order to use devices like external hard drives, external solid state drives, or the Framework Storage Expansion Card to create a live USB, *List USB Hard Drives* must be enabled under *Show advanced drive properties*.
- Use the *Select* Button next to *Boot selection* to choose the downloaded NixOS ISO.
- ⚠ Set *Partition scheme* to *GPT* to ensure the live USB is properly recognized at boot.
- Click Start. A window will pop up to prompt for a choice between *dd image mode* and *ISOHybrid image mode*. Select *ISOHybrid image mode* then *OK*.

Step 3 — Secure Boot

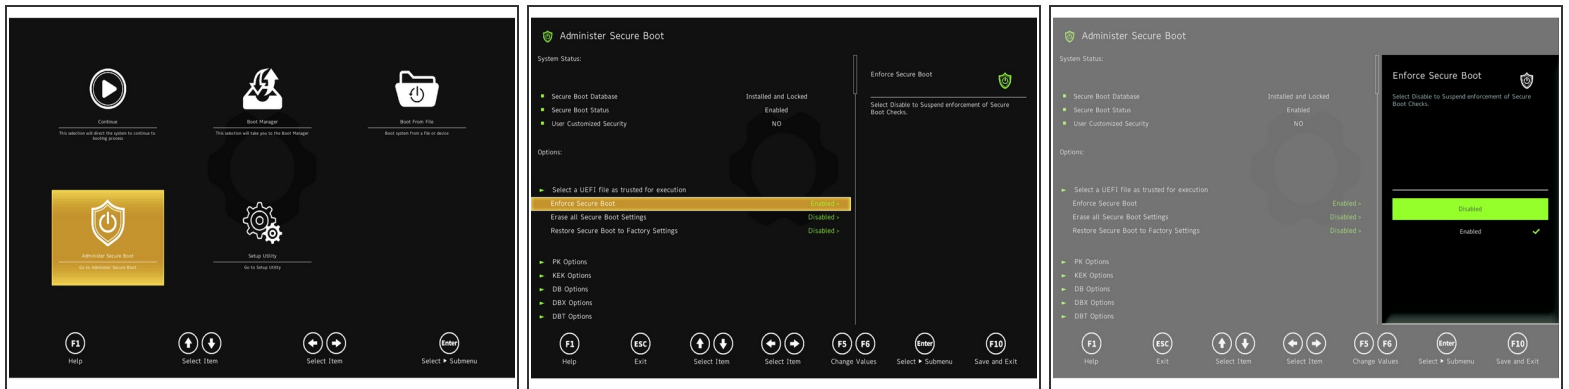


⚠ To install NixOS, Secure Boot must be disabled! By default NixOS will not boot with Secure Boot enabled. Please refer to [our explanation of Secure Boot](#) to learn more

📘 To disable secure boot:

- Boot into BIOS by tapping F2 just before the Framework splash screen.
- Arrow down to Administer Secure Boot. Press enter.
- Arrow down to Enforce Secure Boot. Press enter, select Disabled, and press enter.
- Press F10 to save and reboot. With Yes selected, press Enter.


📌 To enable Secure Boot again, repeat the above steps but select Enable this time.

Step 4 — Booting to Live NixOS USB

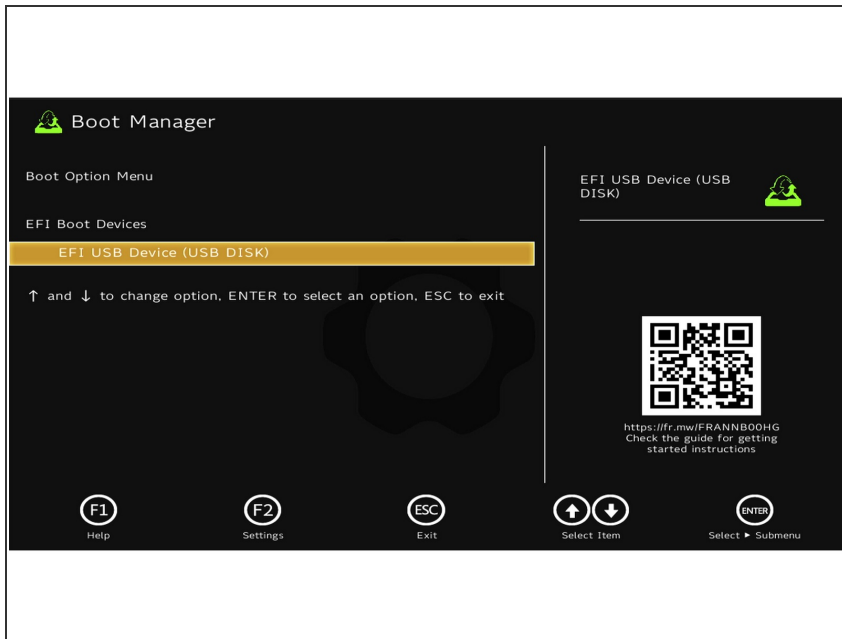


- Insert the USB drive into the powered off Framework Computer, and then power on. Immediately after the power light comes on begin tapping the F12 key before the Framework logo is visible.
 - ⓘ If the computer does not have an existing OS installed, tapping F12 is not necessary and the system will automatically boot the Live USB.
- Use the arrows to select the Live USB, typically named "EFI USB Device (USB Disk)" and press enter to boot from it.
- Hit Enter again to boot into and install NixOS.

Step 5 — Installing NixOS to a drive

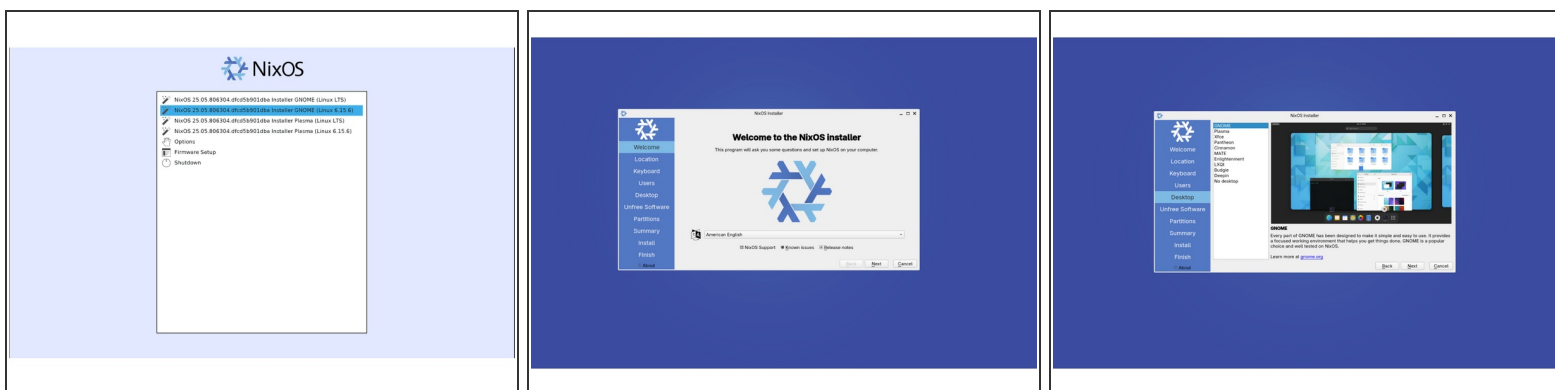

- When the installer first displays a list of kernels to choose from, select the latest one. At the time of this guide, that was kernel 6.15.x - for the sake of this guide, we will assume you've selected GNOME.
- When the installer appears, you will be asked to connect to a network. Connect to wi-fi. It will cycle through the checking process again, then allow you to select your language and press the next button.
- Select your location keyboard and then setup your user account.
- Next, you will want to choose your desktop - as mentioned previously, for the sake of this guide, we will assume GNOME.

Step 6 — Installing NixOS to a drive - Continued

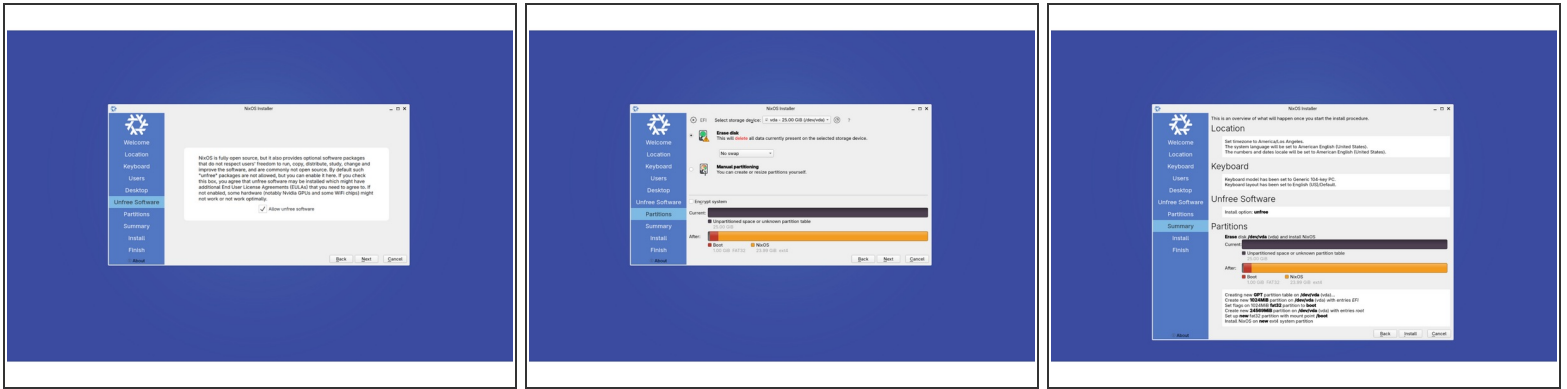

- Next you will be asked if you would like to have access to non-free software. This is recommended for most users, but if you understand it can affect access to proprietary blobs and related, you can elect to not choose it.
- The next option is to choose your partition setup. For most people, the desired choice will be to erase disk. Advanced users, may instead elect for manual partitioning.
- And now, we arrive at the summary screen where you can determined if the settings are what you would like. And you can press the install button to begin writing your selections to the drive.

Step 7 — Finish Setup - Adding the NixOS-Hardware Module

Adding the NixOS-Hardware Module (Framework Laptop 13, AMD AI 300 Series)

This provides the hardware channel steps for the NixOS on the Framework Laptop 13 Guide.

Channel-based (default from graphical installer)

```
sudo nix-channel --add https://github.com/NixOS/nixos-hardware/archive/master.tar.gz nixos-hardware
sudo nix-channel --update
```

```
# /etc/nixos/configuration.nix
imports = [
  ./hardware-configuration.nix
  <nixos-hardware/framework/13-inch/amd-ai-300-series>
];
```

```
sudo nixos-rebuild switch
```

Flake-Based

```
# flake.nix inputs
inputs.nixos-hardware.url = "github:NixOS/nixos-hardware/master";
```


```
# flake.nix modules list
modules = [
  ./configuration.nix
  nixos-hardware.nixosModules.framework-amd-ai-300-series
];
```

```
sudo nixos-rebuild switch --flake .#hostname
```

✦ Framework hardware quirks and fixes for NixOS are maintained in the nixos-hardware project, which isn't part of NixOS by default. Add the module for your CPU generation. If you installed using the graphical installer in Steps 1-6, you're on a channel-based system.

- ① AMD AI 300 Series: [AMD AI 300 Series setup page](#).
- ① AMD 7040 Series: [AMD 7040 Series setup page](#).
- ① Intel Core Ultra Series 1: [Intel Core Ultra Series 1 setup page](#).
- ① Intel 13th Gen: [Intel 13th Gen setup page](#).
- ① Intel 12th Gen: [Intel 12th Gen setup page](#).
- ① Intel 11th Gen: [Intel 11th Gen setup page](#).

Step 8 — Recommended: Updating to the latest firmware

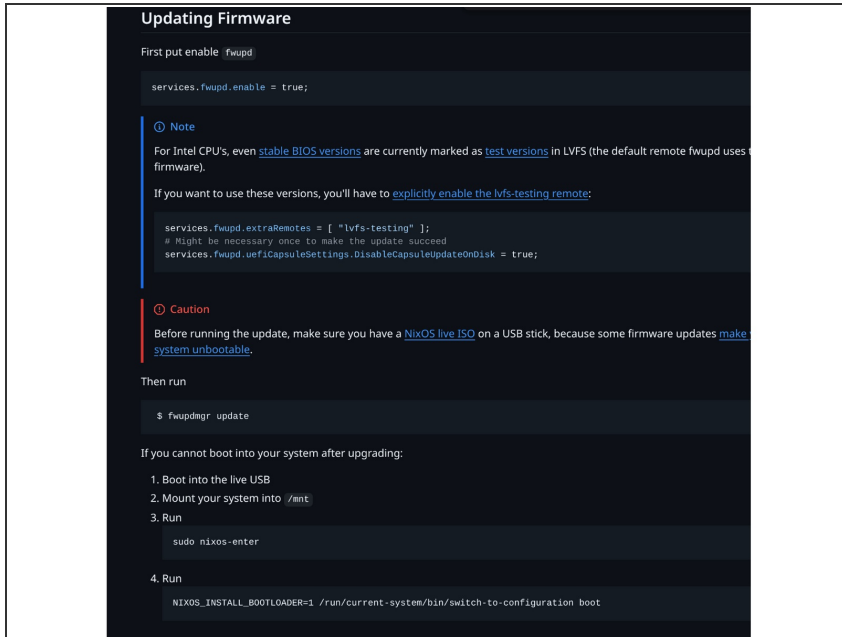

- How to check the BIOS version. Go to and click upper left corner where you see the horizontal line, search terminal and launch it. Please follow the step here: `nix-shell -p lshw dmidecode --run "clear && sudo dmidecode | grep -A3 'Vendor:|Product:' && sudo lshw -C cpu | grep -A3 'product:|vendor:'"`

⚠ If you have Intel 11th Gen Intel Core, you can check [here for the latest firmware](#).

⚠ If you have Intel 12th Gen Intel Core, you can check [here for the latest firmware](#).

⚠ If you have Intel 13th Gen Intel Core, you can check [here for the latest firmware](#).

⚠ If you have AMD Ryzen 7040 Series, you can check [here for the latest firmware](#).

⚠ If you have Intel Core Ultra Series 1, you can check [here for the latest firmware](#).

⚠ If you have AMD Ryzen AI 300 Series, you can check [here for the latest firmware](#).

⚠ **IMPORTANT:** Per the instructions above, we do NOT recommend updating BIOS and firmware using various GUIs. We recommend using fwupdmgr as provided in the step above. Using GUIs can potentially create issues that would not be present using fwupdmgr directly.

Step 9 — Troubleshooting NixOS



- If you need additional help, feel free to visit our [active support community](#).
- We also recommend this amazing newcomer guide for NixOS newcomers called [Zero to Nix](#).

Enjoy using NixOS on your Framework Laptop 13! If you have any questions or run into any issues, we recommend bringing them to the Community in the [Linux NixOS topic](#). Members of the Framework team participate in discussions there.