10 - Load the Printer Drivers

This is a step by step guide on how to install the drivers for your GSS Desktop Wireless Printer.

Written By: Eric Sutter



INTRODUCTION

This is a three-part guide for downloading the drivers for your printer. The first part is for installing the driver when the printer is plugged into the computer with a USB cable, while the second part is for installing a driver when connected to the printer only over the network. The third part is setting up a port for the printer, and is applicable to both the USB and network setup methods.


'"When looking for this printer in the driver, you will use this printer name. >>>>> Bar Code Printer TT053-20**"**

'"Download the drivers Drivers Here

TOOLS:


- Admin Privileges (1)


Step 1 — USB or Network

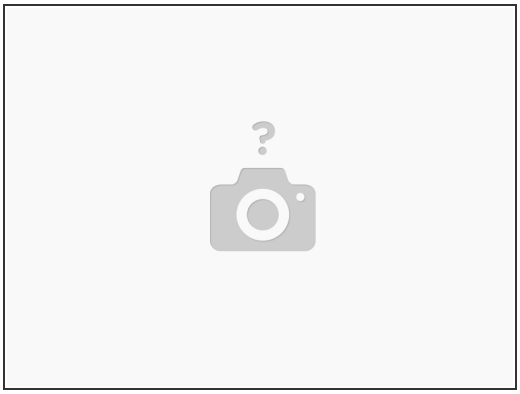


- If installing while connected to the printer by a USB cable, go to Step 2.
- If installing while connected to the printer by over the network, go to Step 6.
- After either, please go to Step 10 to learn how to set up a port for the printer.

Step 2 — Installing with USB Pt.1

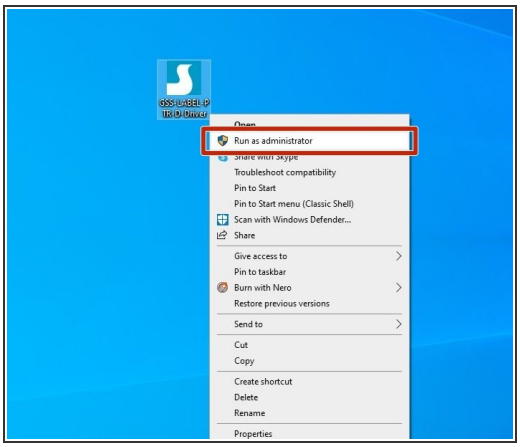

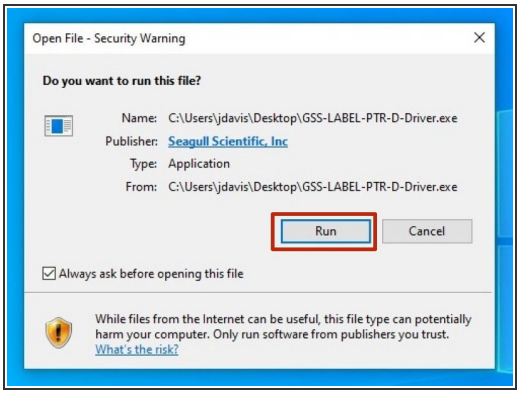


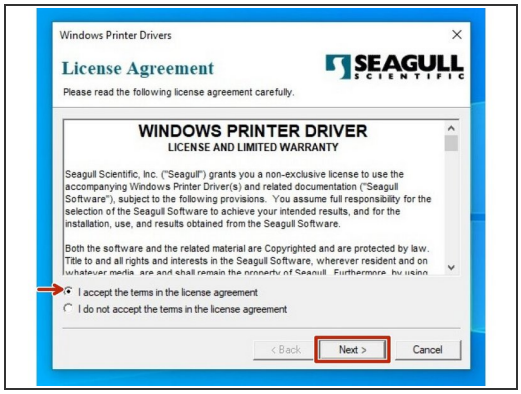



ⓘ *Before running the driver program, please make sure you have connected the printer using the USB cable provided.*

- After downloading the driver program, right click on the program, and click "Run as Administrator".
- If the Security Warning window opens, click "Run" to run the program.
- Review the EULA. If you agree to the terms of use, select the appropriate response and press the "Next" button.

Step 3 — Installing with USB Pt.2

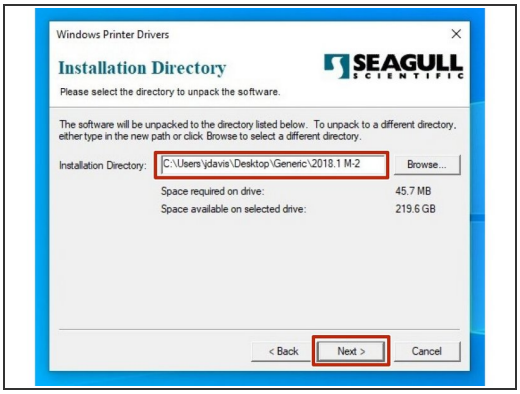


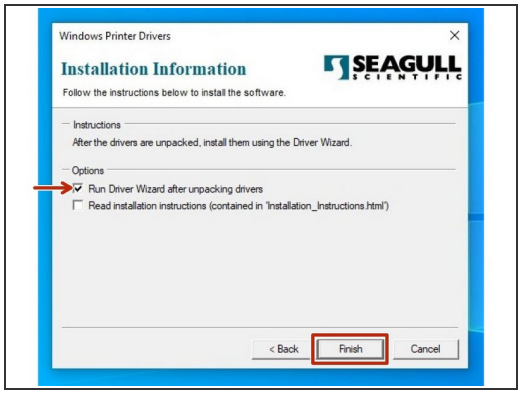


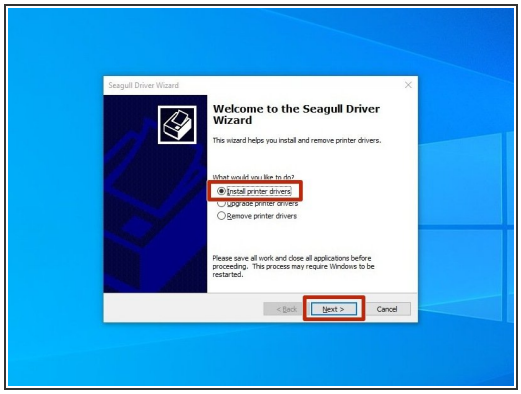

- Review the Installation Destination and change the location, if desired. Click "Next" to continue.
- Choose "Run Driver Wizard..."; the second option is unnecessary. Then select "Finish."
- After installation is completed, the Driver Wizard will start. Choose the option to "Install printer drivers" and click "Next".

Step 4 — Installing with USB Pt.3

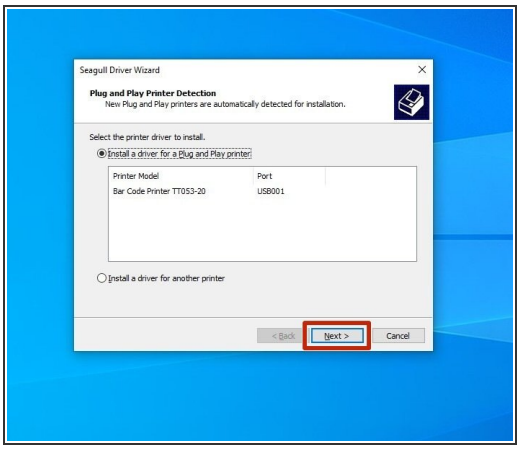

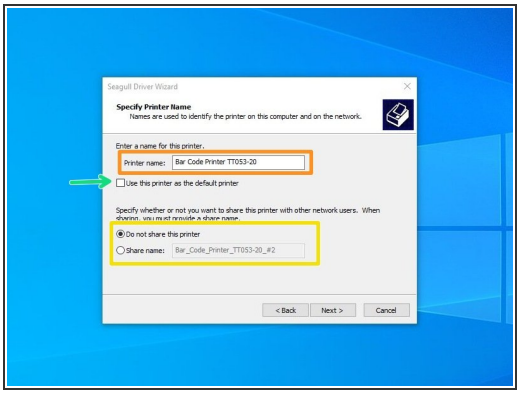



- If you have connected the printer via USB prior to downloading and installing the drivers, your computer will automatically detect the printer. Click "Next" to continue.

  ⓘ *If you did not connect the printer prior to installation, close the program, connect the printer, and re run the program from the location you saved it to restart the process.*


- There are some things that can be customized before installation of the driver. You can choose to rename the printer (Orange), check it as the Default printer (Green), and make it visible on your network with a specific name (Yellow). Hit "Next" when you've made your choices.


  For standard setup, we recommend against changing these settings from their default. If you know what you're doing, adjust the settings as you please.

- Confirm setup option before pressing "Finish". If anything needs to be changed, press "Back".

  ⓘ *You may receive a Security Warning from Windows. If you do, choose the option to "Install".*


Step 5 — Installing with USB Pt.4

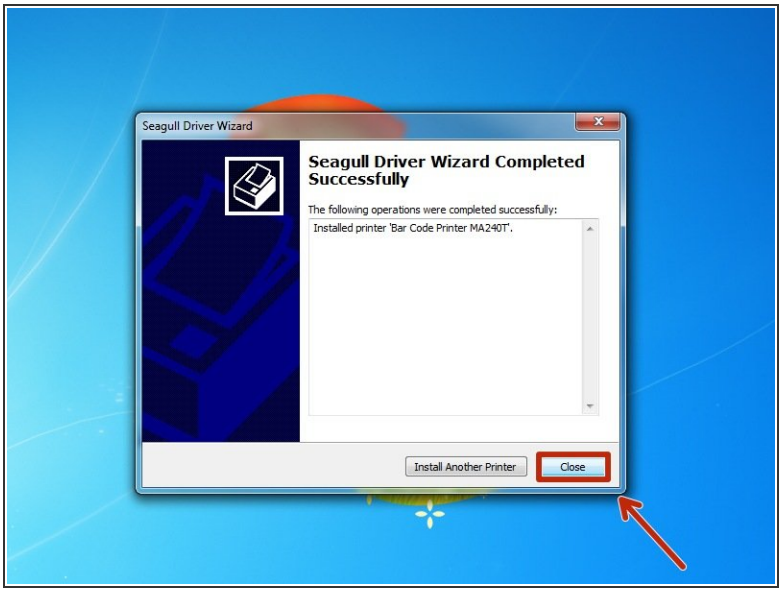


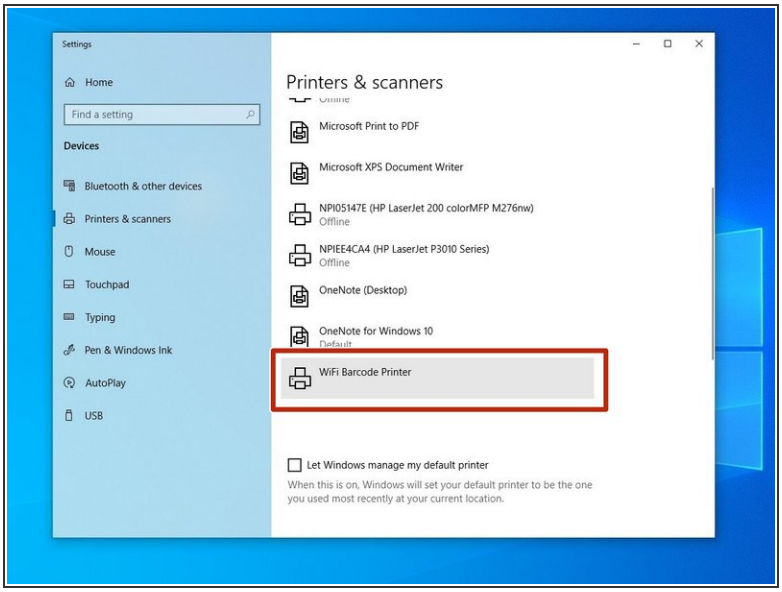


- Once installation has been completed, hit the "Close" button.
- Check your Printers & Scanners in Windows to verify setup has been completed.
- Please go to Step 10 of this guide to set up a port for the printer.

Step 6 — Installing over Network Pt.1

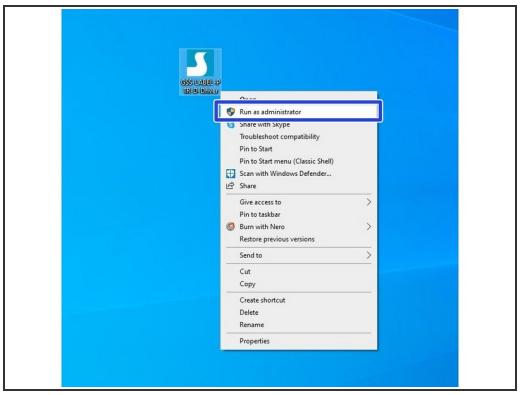

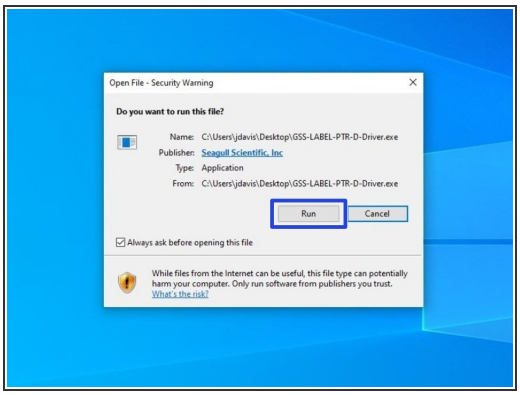


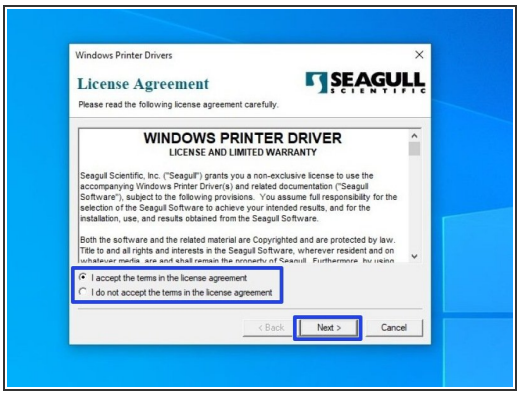



ⓘ *Steps 6 - 9 explain how to install the drivers for a printer connected to your PC over the network. If your printer is plugged in directly to your computer, please see Steps 1-5.*

- After downloading the driver program, right click the program and click "Run as administrator.
- If the Security Warning window opens, click "Run" to run the program.
- Review the EULA. If you agree to the terms of use, select the appropriate response and press the "Next" button.

Step 7 — Installing over Network Pt.2

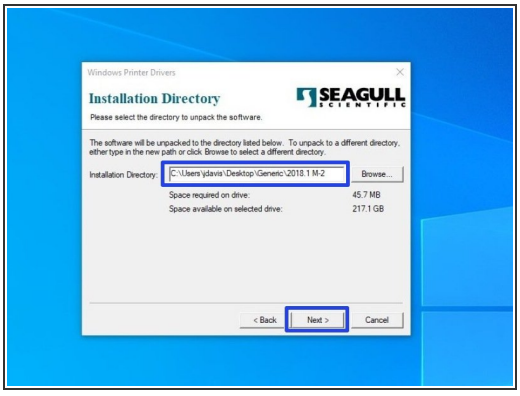


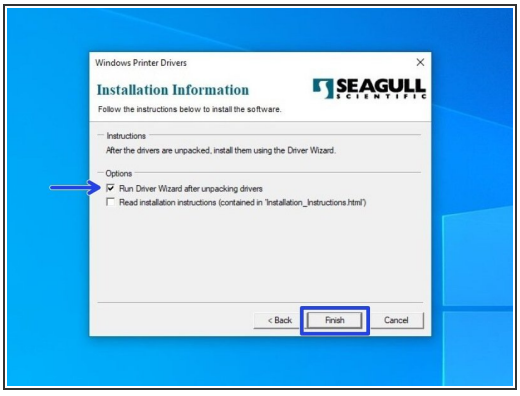


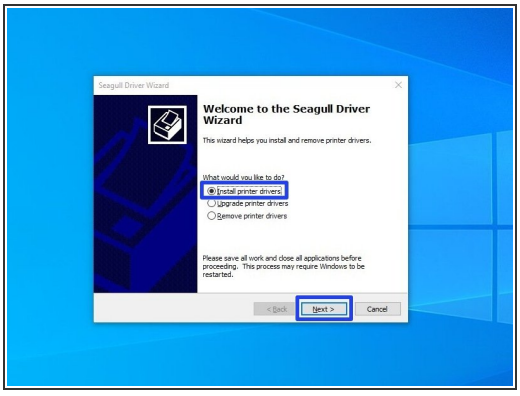


- Review the Installation Destination and change the location, if desired. Click "Next" to continue.
- Choose to "Run Driver Wizard..."; the second option is unnecessary. Then select "Finish."
- After installation is completed, the Driver Wizard will start. Choose the option to "Install printer drivers" and click "Next".

Step 8 — Installing over Network Pt.3

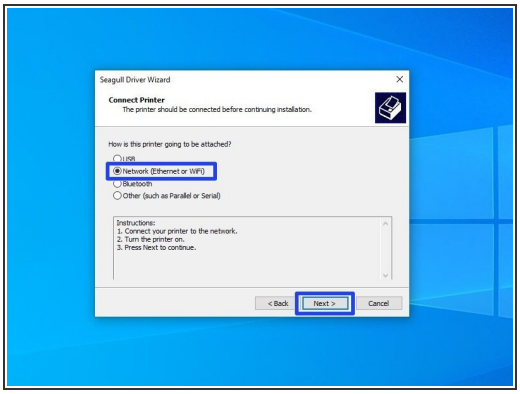


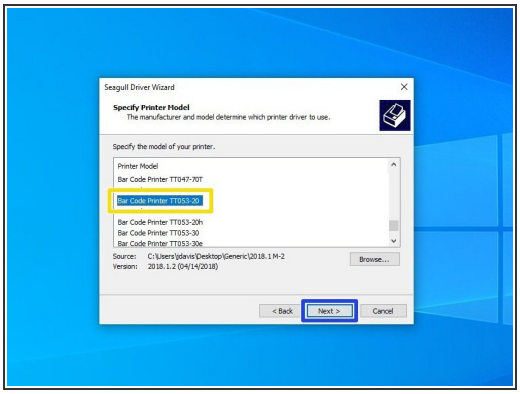


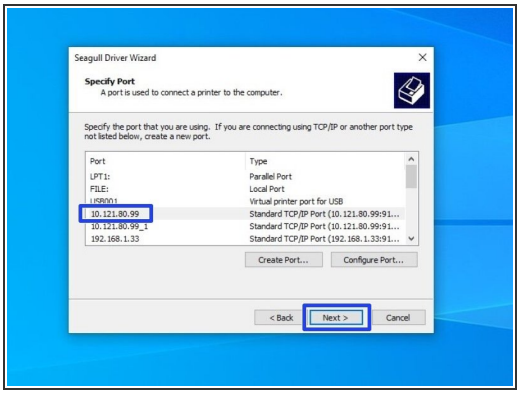

- Choose the option for "Network (Ethernet or WiFi)," the click the "Next" button.
- Scroll down until you find the Printer Model "**Bar Code Printer TT053-20**". Click on it, and while it is highlighted, click the "Next" button.
- Select the correct port/IP for your printer (the IP should be displayed on the built-in screen on the printer).


Step 9 — Installing over Network Pt.4

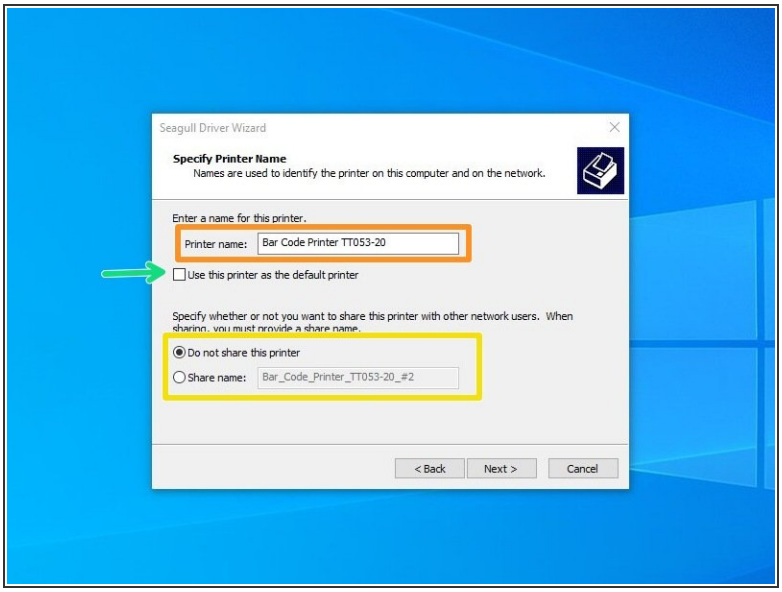


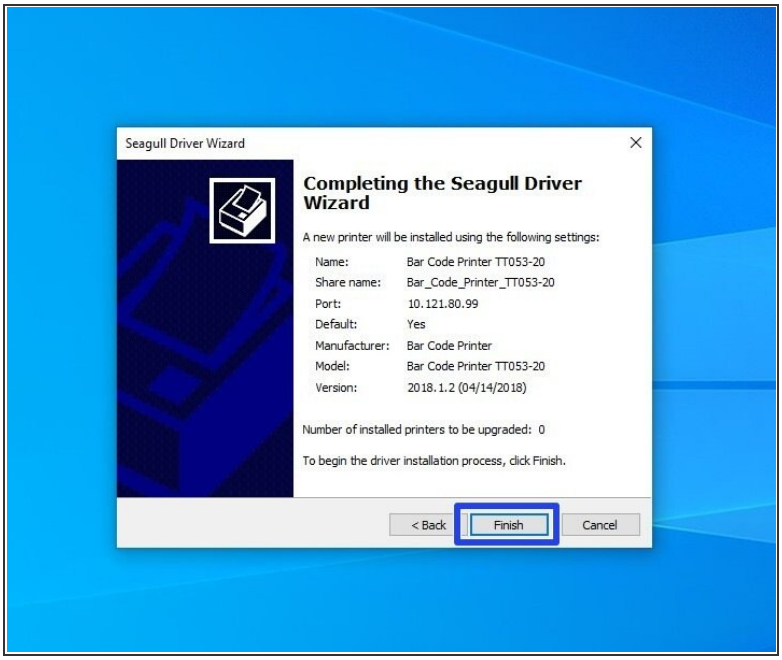


- There are some things that can be customized before installation of the driver. You can choose to rename the printer (Orange), check it as the Default printer (Green), and make it visible on your network with a specific name (Yellow). Hit "Next" when you've made your choices.
  - For standard setup, we recommend against setting the printer as default printer or sharing it. If you know what you're doing, adjust the settings as you please.
- Confirm setup option before pressing "Finish". If anything needs to be changed, press "Back".
  - *You may receive a Security Warning from Windows. If you do, choose the option to "Install".*

Step 10 — Setting a Port Pt.1

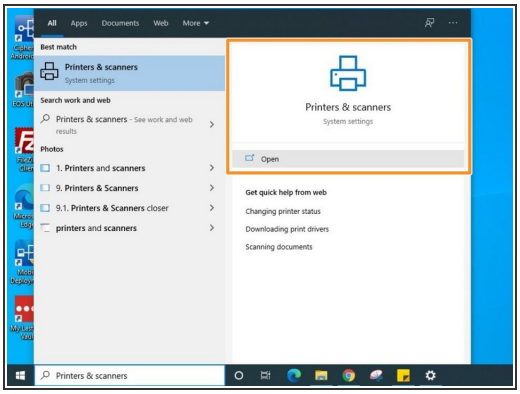


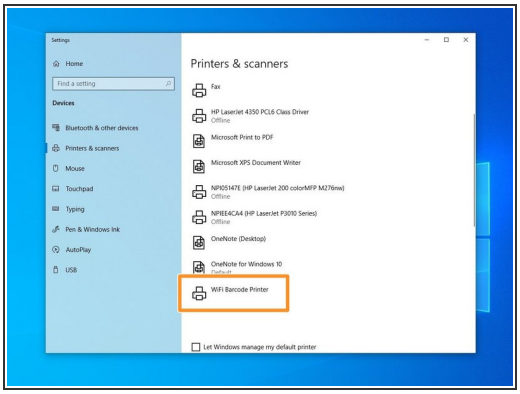


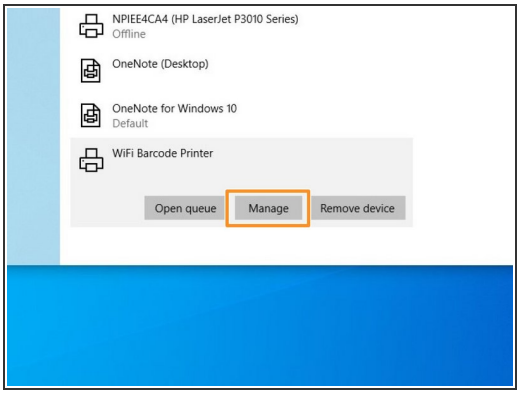


- Use the windows search bar on your taskbar to find and open "Printers & Scanners".
- Find the printer you just installed, and click on it once.
- Click on "Manage".

Step 11 — Setting a Port Pt.2

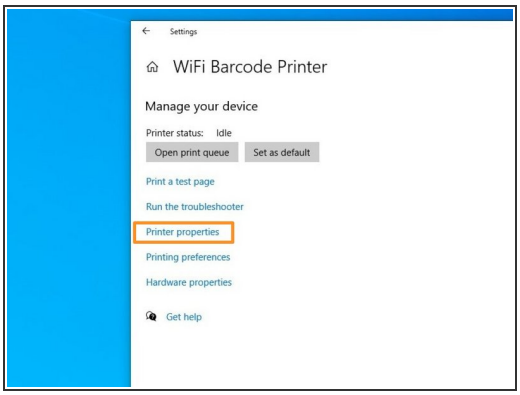


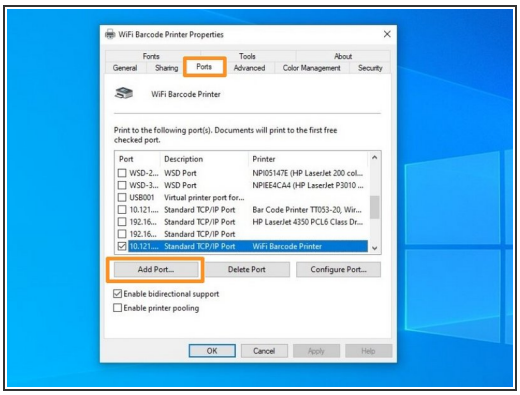


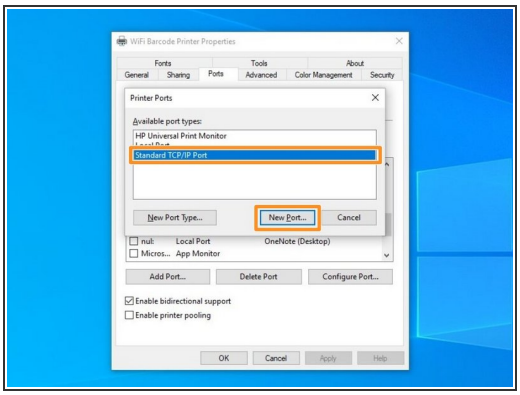


- Click on "Printer properties".
- Select the "Ports" tab at the top, and then "Add Port..." at the bottom left.
- Select "Standard ICP/IP Port," and then click "New Port".

Step 12 — Setting a Port Pt.3

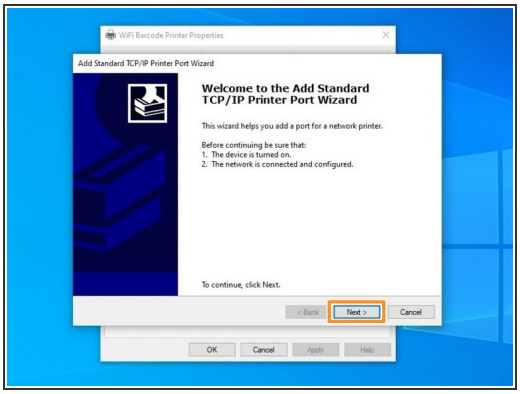


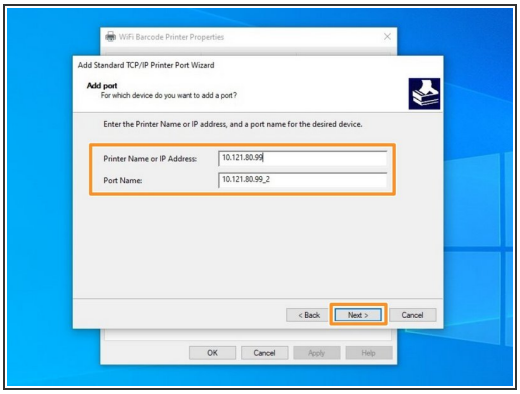


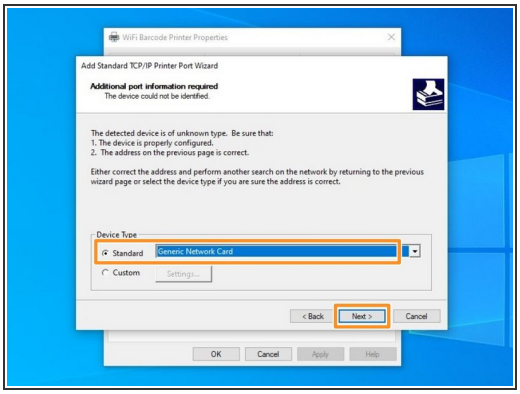

- Check that the printer is turned on, and that the network is connected and configured, then hit "Next".
- In the first text box, enter the IP address the printer is assigned to. This should also populate the "Port Name" box. Hit "Next" at the bottom right.
- Select the option for "Standard" device type, and from the dropdown select "Generic Network Card" - this is the built-in network card of the printer. Once it's selected, hit the "Next" button.


Step 13 — Setting a Port Pt.4

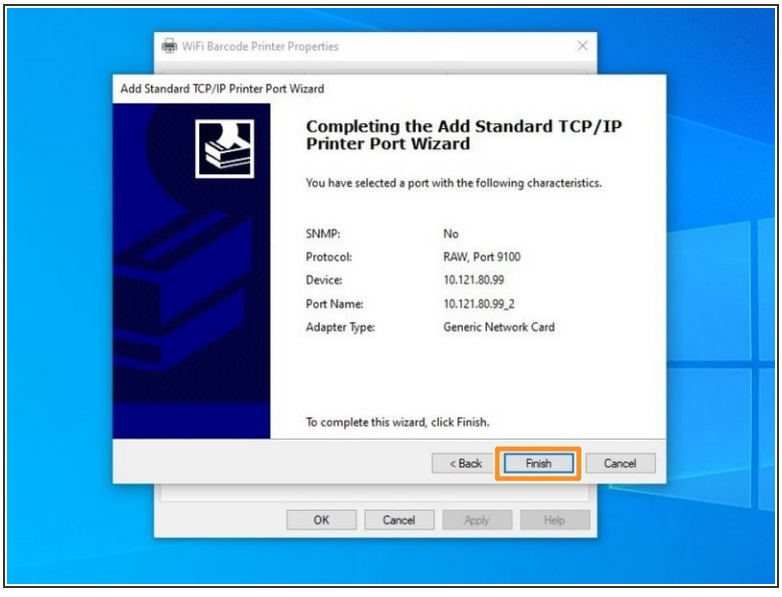


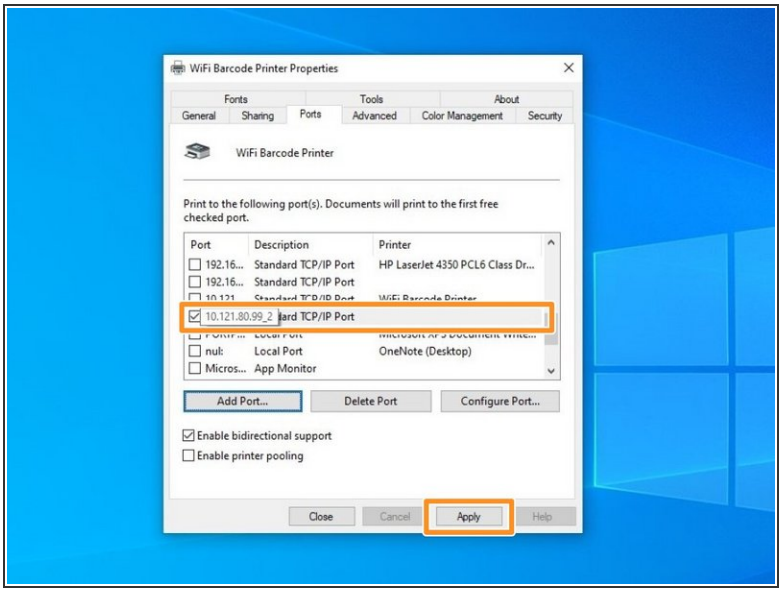


- Review the selections, and then hit "Next".
- Scroll down to the new port, check the box, and then click "Apply".

Step 14 — Testing the Port Pt.1

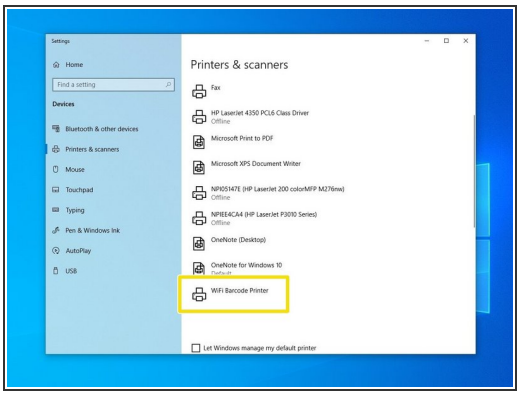


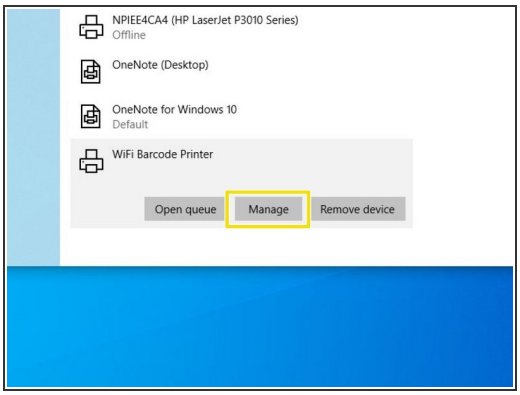


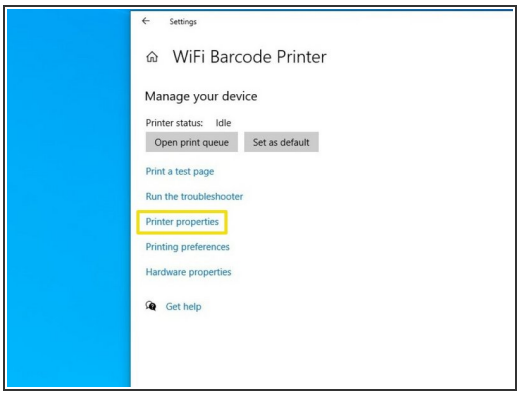

- At this point, make sure to unplug any cables connecting the printer and the computer, so that they are only connected via the network. This is to make sure that you can print through the port you just set up.
- Open the Printers & Scanners menu. Click on the printer we just installed a port for.
- Click on "Manage".
- Click on "Printer properties".

Step 15 — Testing the Port Pt.2

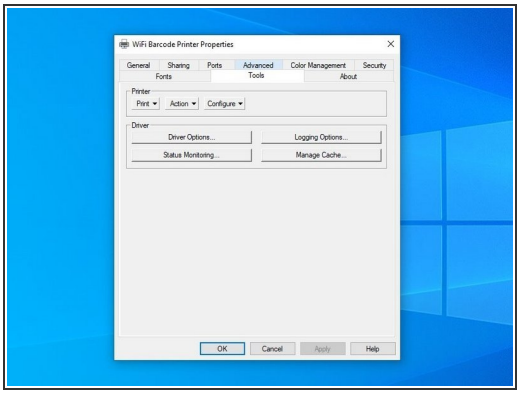

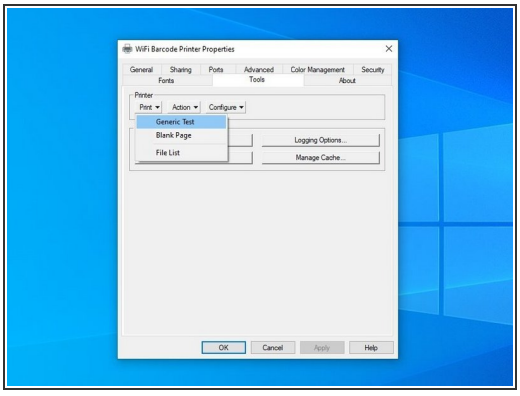



- Click on the "Tools" tab at the top, then click on the "Print" option.
- From the dropdown, select "Generic Print".
- The printer should print a test sheet like the one pictured. If the test page has printed over the network, that means the port you set up is working. If the page doesn't print, go back through this guide and the previous (5 - Assigning an IP to your printer Wireless & Wired).

This document was generated on 2026-11-07 09:22:14 AM (MST).

The drivers for your printer are now installed! You may return to the guide list.