04 - Mini PC

Written By: Eric Sutter

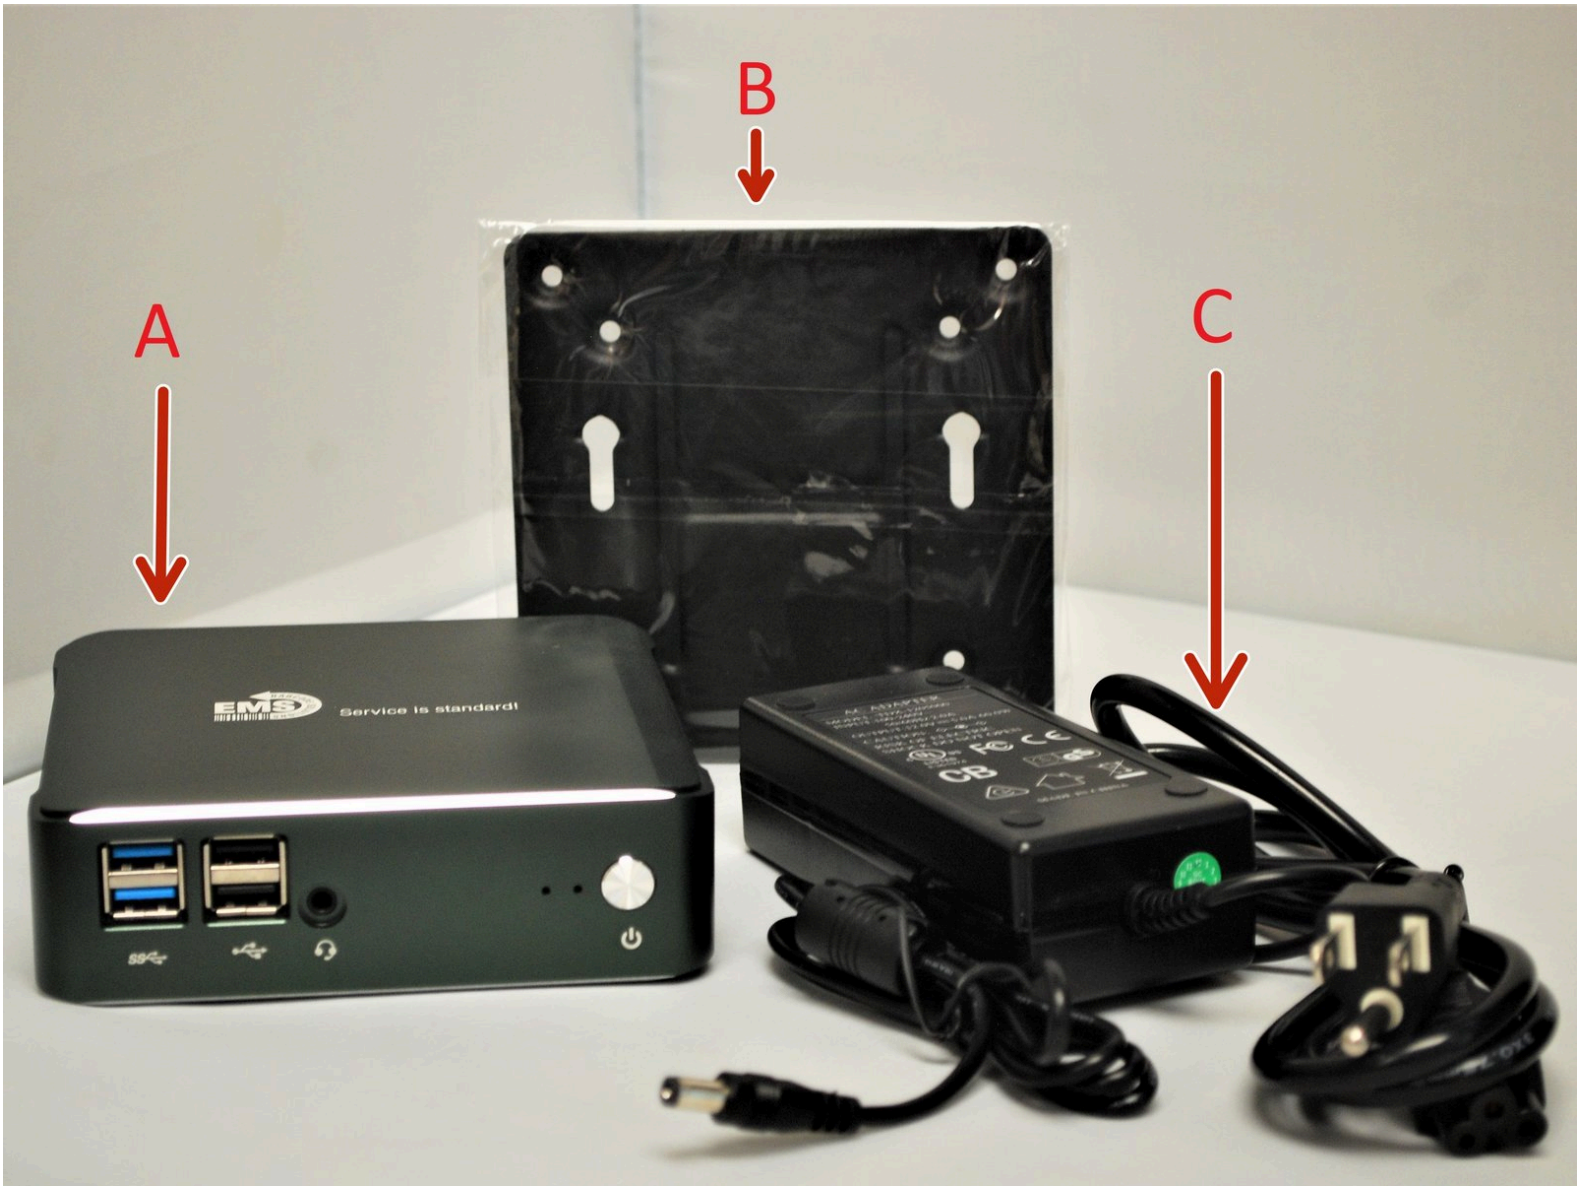

Step 1 — Unpacking and Inspection





- A. Mini PC
- B. Mounting Plate
- C. Power Cable with AC Adapter
- D. HDMI Cable
- E. Screw Bag

Step 2 — Front Ports Breakdown

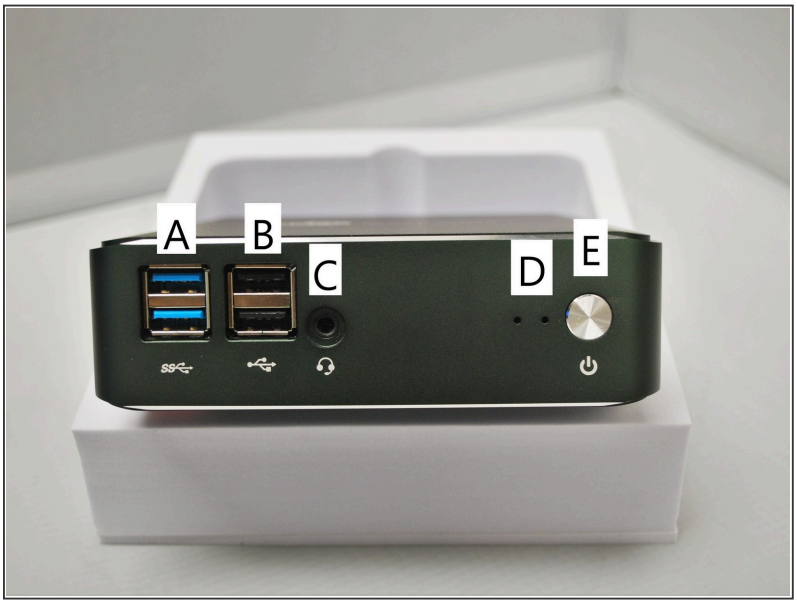

- A: Two USB 3.0 "SuperSpeed" ports.
- B: Two USB 2.0 ports.
- C: Auxiliary cable port for headphones, earbuds, or speakers.
- D: Indicator LEDs. The left LED is the bot indicator, and the one on the right is the hardrive indicator.
- E: Power button.

Step 3 — Rear Ports Breakdown



- A: A/C power port.
- B: Ethernet port.
- C: Two USB 3.0 "SuperSpeed" ports.
- D: HDMI port.
- E: DisplayPort port.
- F: USB type C port.

Step 4 — Preparing the PC to Mount

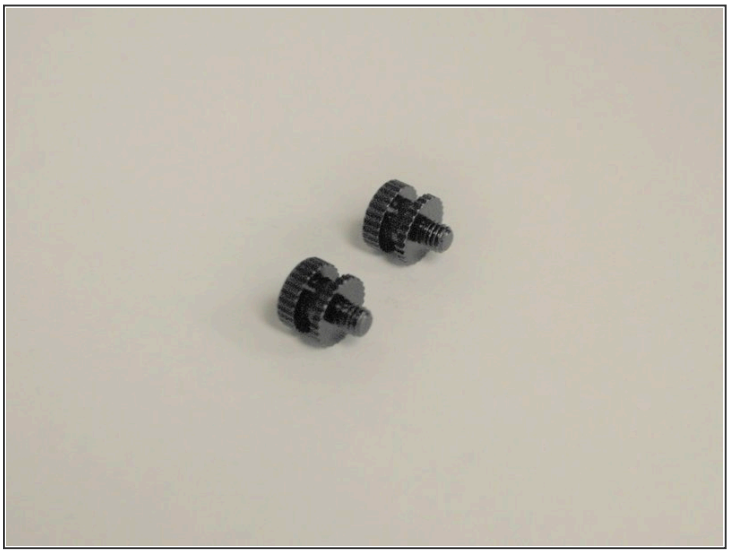



- Find and pull out these two screws from the bag.
- Attach the screws onto the back of the mini PC.

Step 5 — Preparing the Mount for the PC





- Press the Mounting Plate against the mounting extension bracket.
  - ⓘ Make sure the plate is facing the same way as it is shown in the Image.
- Screw the Mounting Plate to the mounting extension bracket.

Step 6 — Mounting the PC



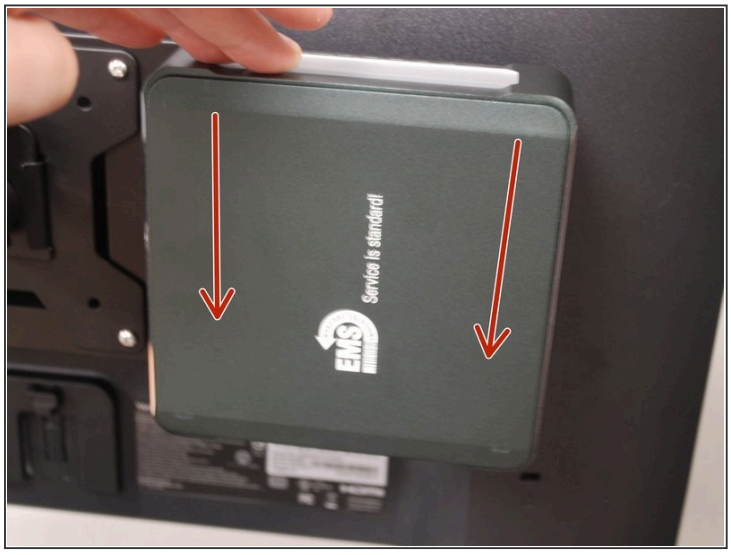

- Insert the metal pegs on the bottom of the PC into the holes of the mount plate.
- Push the PC down into place. It should flit snugly and securely.

Step 7 — Plugging in the PC

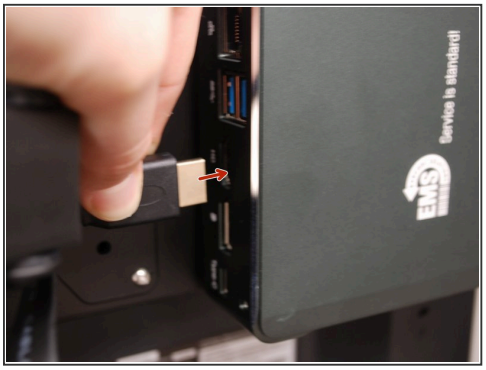




- Plug one end of the HDMI cable into the Mini PC
- Plug the other end of the HDMI cable into the monitor.
- Plug the power cable into the Mini PC then into an outlet.