



Arch Linux on the Framework Laptop 12

How to install Arch Linux on a Framework Laptop 12

Written By: Matt Hartley



INTRODUCTION

Once you have your Framework Laptop 12 set up following the [Quick Start Guide](#), you're ready to install your preferred OS. With the latest release of Arch Linux, everything works pretty smoothly. You can check our [Linux page](#) for additional Linux compatibility notes.

NOTE: This is a [Compatible Community Supported Linux Distribution](#). [Learn more here](#).



TOOLS:


- [Storage Expansion Card](#) (1)
-

Step 1 — Arch on the Framework Laptop 12 (13th Gen Intel® Core™) and Intel® Core™ Series 3)





- ✦ This guide is for Arch on both Framework Laptop 12 (13th Gen Intel® Core™) and Intel® Core™ Series 3).

Step 2 — (From Mac OS) Preparing USB Arch Linux Installation Media

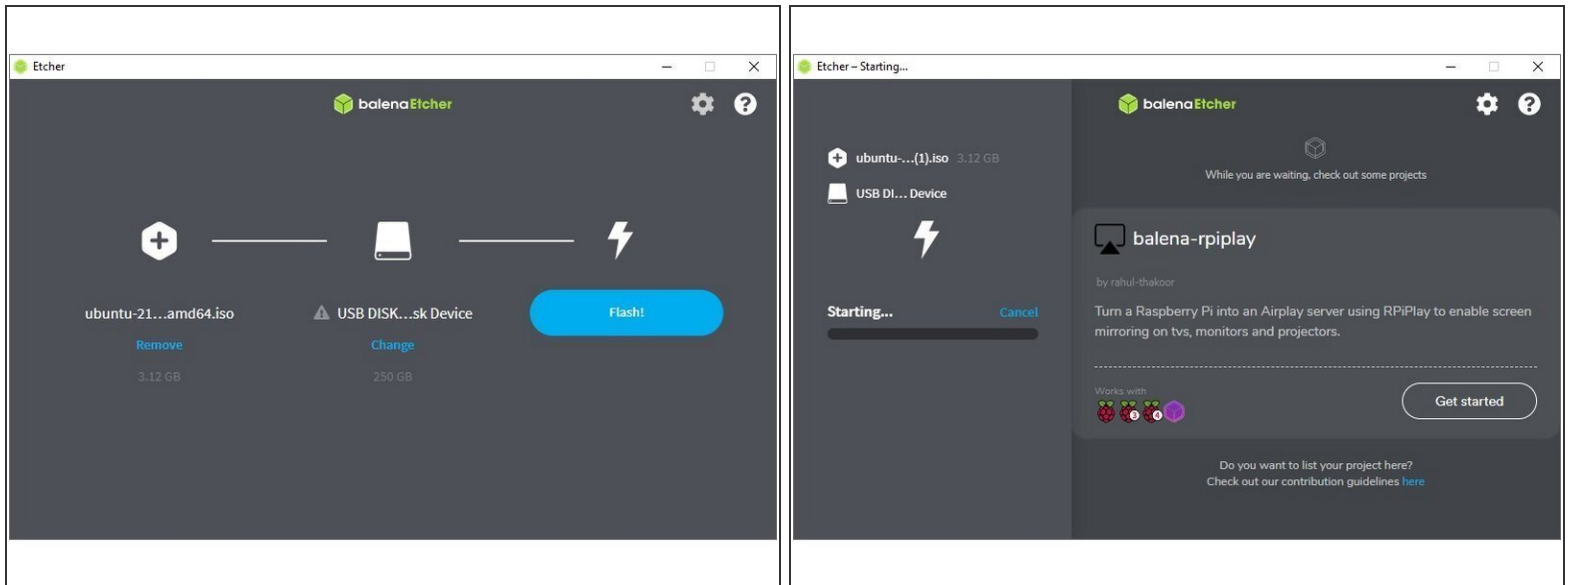


- First, download [Arch Linux](#) from Arch's website. Arch Linux has [a detailed installation guide](#) that you can follow. We'll go through the steps in this Guide assuming you have a simple installation scenario of a fresh install on a blank drive.
- Download [balenaEtcher](#) as a tool to create the USB installer from the ISO. balenaEtcher is available for MacOS. Install it.
- Launch balenaEtcher. Insert your USB drive (8GB or larger). Click on "Flash from file" and select the Arch Linux iso that you downloaded. Click on "Select target" and choose your USB drive. Click "Flash" and wait a minute or two for it to complete.
- Once the USB drive creation is complete, you can close balenaEtcher and eject the USB drive from your OS.

Step 3 — (From Windows) Preparing USB Arch Linux Installation Media

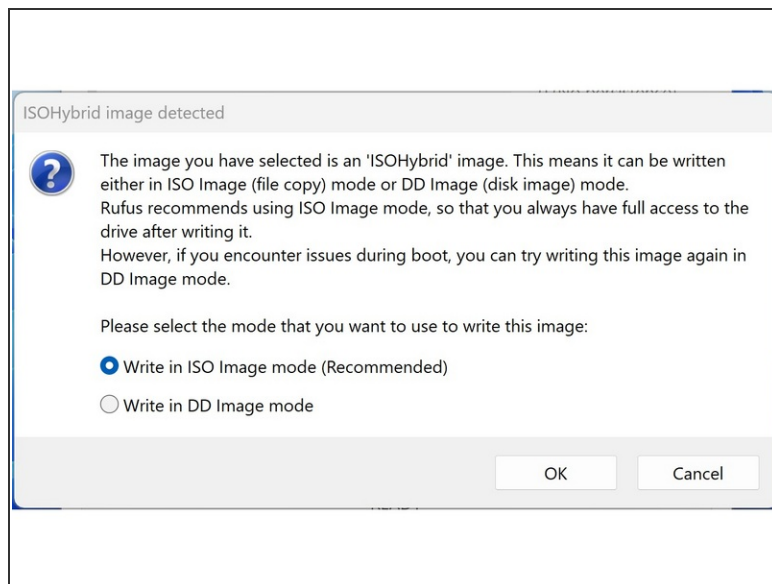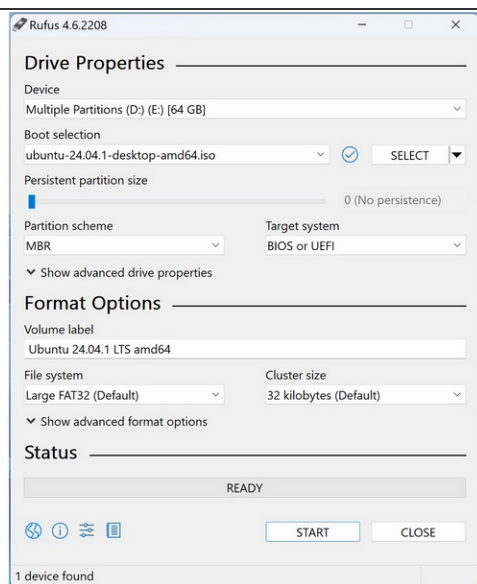

- First, download [Arch Linux](#) from Arch's website. Arch Linux has [a detailed installation guide](#) that you can follow. We'll go through the steps in this Guide assuming you have a simple installation scenario of a fresh install on a blank drive.
- Download [Rufus](#) as a tool to create the USB installer from the ISO - select the top download option from the link provided. Rufus is available for Windows. Install it.
- Open Rufus, from the Device drop-down, select the USB flash drive stick.
 - ⚠ In order to use devices like external hard drives, external solid state drives, or the Framework Storage Expansion Card to create a live USB, *List USB Hard Drives* must be enabled under *Show advanced drive properties*.
- Use the *Select* Button next to *Boot selection* to choose the downloaded Arch Linux ISO.
- ⚠ Set *Partition scheme* to *GPT* to ensure the live USB is properly recognized at boot.
- Click Start. A window will pop up to prompt for a choice between *dd image mode* and *ISOHybrid image mode*. Select *ISOHybrid image mode* then *OK*.


Step 4 — Secure Boot

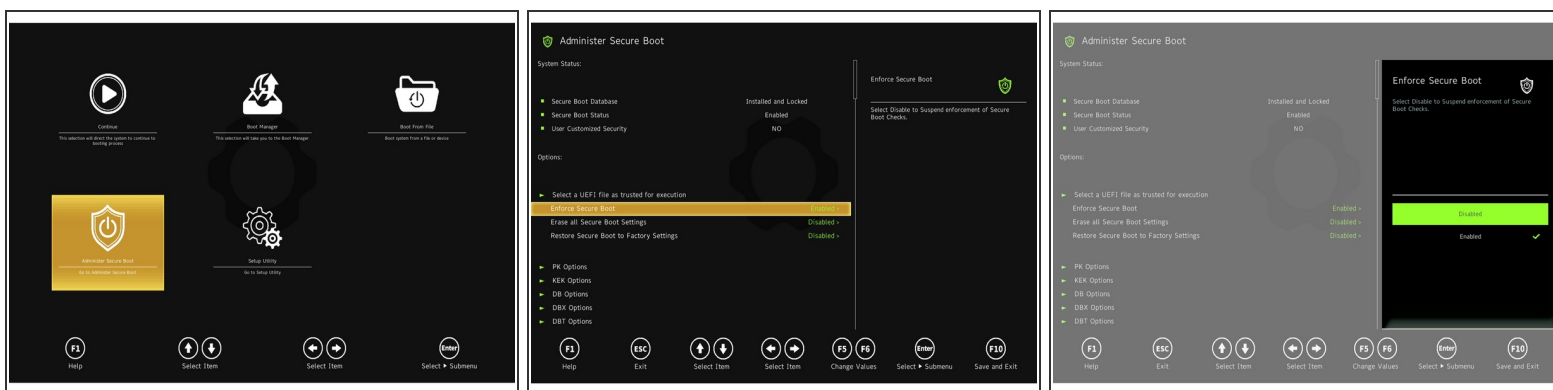

⚠ **Enforce Secure Boot must be Disabled:** While Arch Linux can be configured to support Secure Boot, the Live ISO does not ship with a signed bootloader by default. [Information about Secure Boot on Framework Computers can be found here.](#)


- To disable Secure Boot, repeatedly tap F2 after turning on the computer to enter the BIOS Menu. Then use the arrow keys to select "Administer Secure Boot" then use the arrow keys to change "Enforce Secure Boot" to "Disabled". Press F10 to save the changes and reboot.
- Information about implementing Secure Boot with Arch Linux can be found on the [Arch Wiki](#).

Step 5 — Booting the Arch Linux Install Media

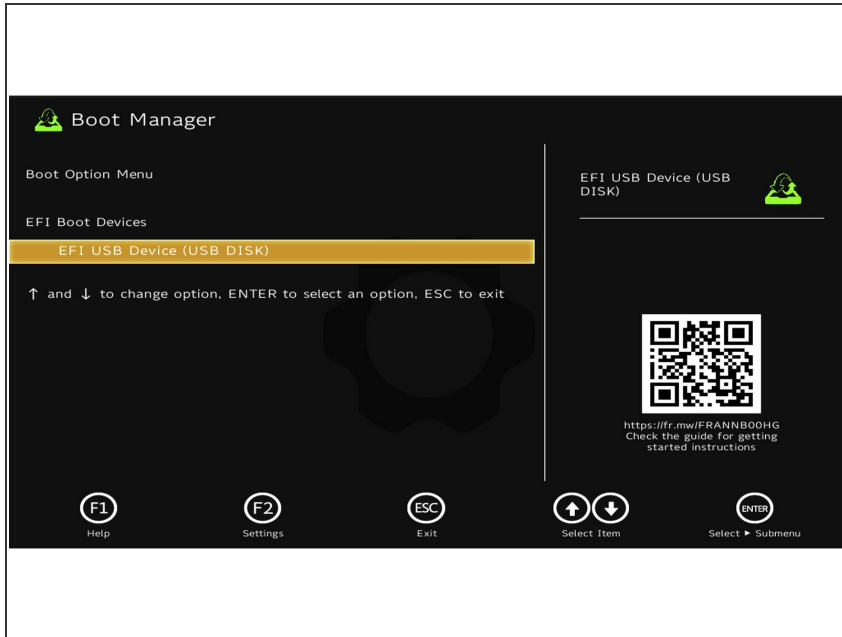


- Insert the USB drive into the powered off computer, and then power on. If an existing OS is installed on the Storage drive in your laptop, immediately after the power light turns on, repeatedly tap the F12 key.
- ⓘ If there is no internal storage drive installed or it is blank, the laptop will boot to the USB drive directly.
- Hit Enter again to boot into and install Arch Linux.
- ✦ This is a distribution of Linux that ships in an extremely minimal state. Please utilize the Arch Wiki to for more detailed information on [how to install it](https://wiki.archlinux.org/title/how_to_install_it).
- ⓘ This guide follows a fast track method for installation using [archinstall](https://wiki.archlinux.org/title/archinstall) designed to make the process more user friendly.

Step 6 — Starting the Archinstall Script

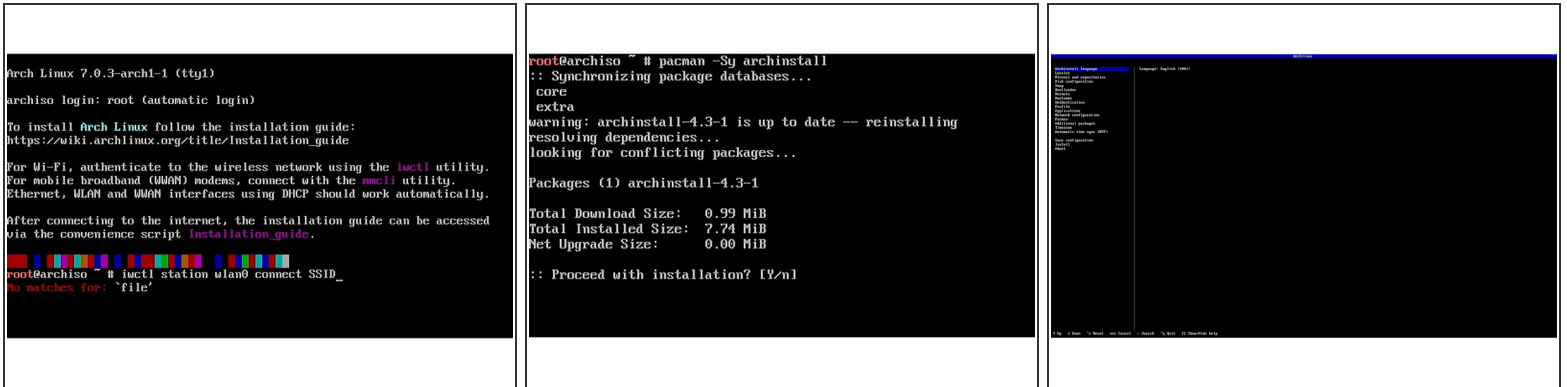

- Once booted into a live environment, a command line is presented automatically logged in with the root account to provide full admin access.
 - ⚠ Having root access means that anything targeting the internal drive or other drives connected to the computer can result of loss of data. If possible, back up any important data before continuing with this install process.
- Start by connecting to a network. Wired networks over the Ethernet expansion card will automatically configure. For wireless networks use the command `iwctl station wlan0 connect SSID` replacing SSID with the name of the desired wireless network.
- Once connected to the internet, install the latest version of the `archinstall` script by running `pacman -Sy archinstall` then entering Y when prompted.
- When this finishes, start the `archinstall` script. The true Arch Linux installer starts here.
 - ❗ The starting point for `archinstall` is a list of stages, with the first stage being to select a language for the installer. The installer is primarily navigated using the arrow keys, enter key, and space bar.

Step 7 — Configuring System Region

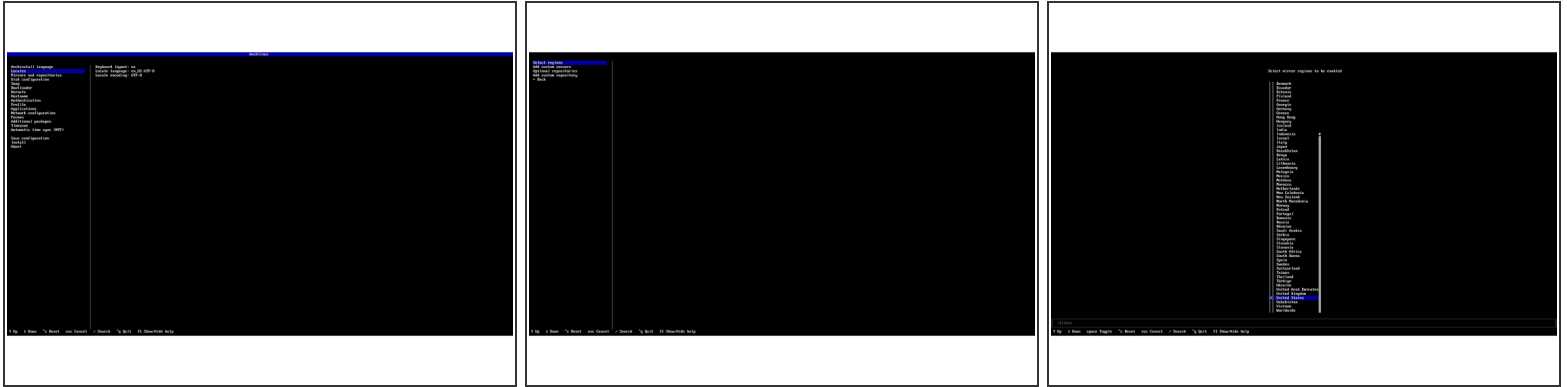

- After choosing a language for the installer, use the arrow keys and enter key to select Locales. If the default options shown are acceptable, this can be skipped.
- Now use the keyboard to select the Mirrors and Repositories menu.
 - Choose "Select regions" and use the arrow keys to select the nearest geographic region to get the best performance for system updates.
 - ❗ Choose "Optional repositories" if the multilib repository is needed to provide libraries for packages such as Steam.

Step 8 — Configuring Storage




- Select "Disk configuration" to bring up a screen showing just options for "Partitioning" and "Back". Choose "Partitioning".
- Select "Use a best-effort partitioning layout" to enter the disk selection menu.
- Select a disk for install by using the space bar to mark that disk with an X while its line is highlighted. Typically the disk should be the one with the path `/dev/nvme0n1`.
- On the "Select main filesystem" screen, select the preferred filesystem. Users who do not know the differences between filesystems are probably safest choosing ext4 or xfs as these are generally considered time-tested.
 - ❗ btrfs includes additional prompts for choosing whether to use features like subvolumes, compression, and snapshots. More information about these features can be found on the [Arch Wiki](#).
- Encryption can be enabled by entering the Disk encryption submenu, choosing LUKS, then using the space bar to select the main partition made earlier for encryption.
- Back out of "Disk configuration" when finished and enter the "Swap" menu. Here select Yes to enable zram, which uses compressed sections of system memory in place of a swap file or partition. Then select the default option of zstd for compression.

Step 9 — Configuring System




- Select the "Bootloader" menu, then again the "Bootloader" submenu. For maximum compatibility and ease of maintenance later, select GRUB or Limine as a bootloader.
- Back out of the "Bootloader" menu and move on to the "Kernels" menu. For simplicity's sake select Linux here.
- Back out of the "Kernels" menu and enter the Hostname menu. This is where the name the computer uses to identify itself on the network is set. It is usually safest to limit this to alphanumeric characters.
- After setting hostname, enter the "Authentication" menu to create the first user.
 - ❗ Root password can be skipped, which disables the administrator account. The first user created will be given administrator privileges.
- Select "User account", then enter a username and password. After confirming the password, choose yes when asked if the new user should be a superuser. Then select "Confirm and exit".

Step 10 — Configuring Desktop

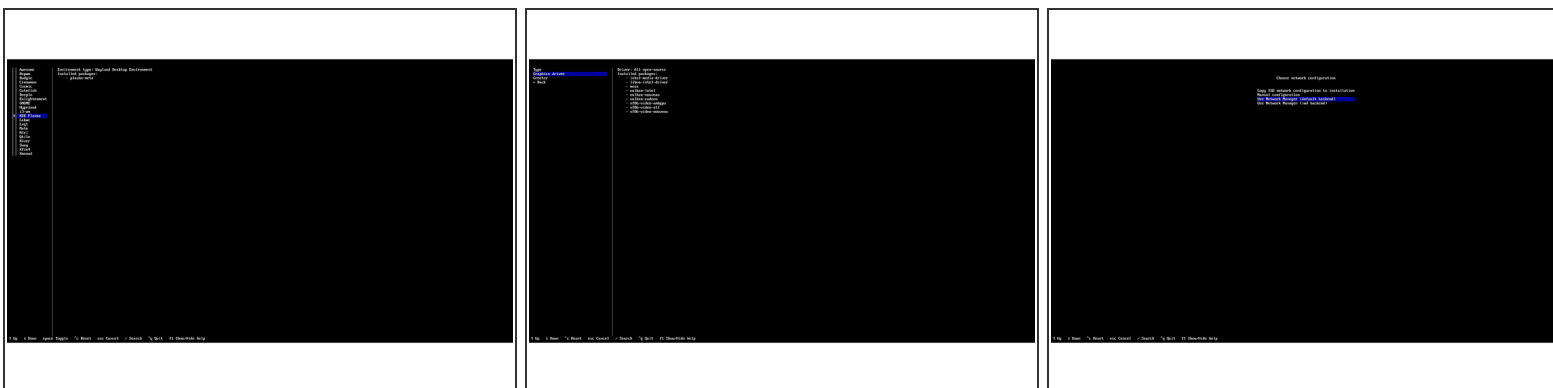

- Back out of "Authentication" and enter the "Profile" menu then the "Type" submenu. Select the "Desktop" profile. This will open a selection for desktops. Choose according to preference.
 - ❗ KDE, Gnome, and Cosmic will most likely be the most comfortable choices for users new to Linux.
- Enter the "Graphics driver" submenu. The default of "All open-source" is safe and makes it easier to transfer the drive between computers.
- Select a greeter if one was not already selected by the desktop selection. This is a matter of user preference.
- Back out of "Profile" and enter the "Applications" to set up some essential apps and services including Bluetooth and Additional Fonts.
 - ❗ The recommended option for Audio is pipewire, and the recommended option for Power Management is tuned. It is also helpful to install all of the additional fonts.
- Back out of "Applications" and enter the "Network configuration" menu. Select "Use Network Manager (default backend)" for the simplest configuration.

Step 11 — Finalizing Install

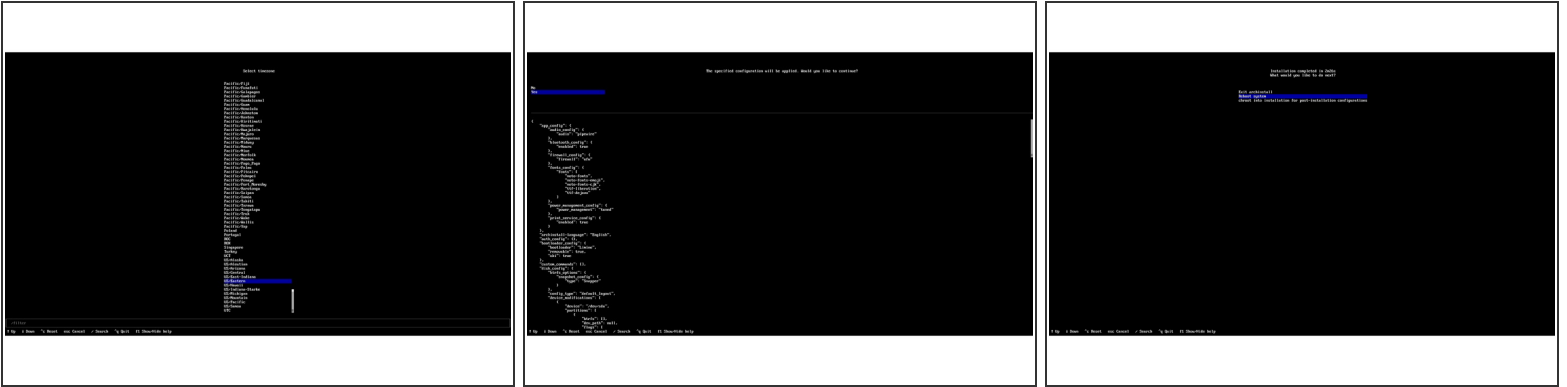

- Back out of "Network Configuration". The "Pacman" section can be skipped as it only has a toggle for colorizing terminal text on compatible terminals and displays.
 - The "Additional Packages" section lets you install packages not selected earlier. For the Framework Laptop 12 there are additional packages needed to use the touchscreen, handle tablet mode, automatic display rotation, and the optional fingerprint sensor, use this menu to select the `fpriind`, `libinput`, and `iio-sensor-proxy` packages.
 - Enter the "Timezone" to select the timezone for displayed time on the system. "Automatic time sync (NTP)" can be skipped as it is already enabled by default. Select "Install," confirm "Yes," then "Reboot system" when done. Select "Reboot system" when the install is completed.
 - Almost there, follow the completion guide for your hardware, then fold the screen back into tablet mode. The on-screen keyboard appears whenever you tap a text field.
- ① [Framework Laptop 12 \(Core Series 3\)](#)
- ① [Framework Laptop 12 \(13th Gen\)](#)

⚠ [Stylus Setup and Troubleshooting on Linux](#)

Step 12 — Fingerprint Reader Setup

```
Using device /net/reactivated/Fprint/Device/0
Enrolling right-middle-finger finger.
Enroll result: enroll-stage-passed
Enroll result: enroll-stage-passed
Enroll result: enroll-stage-passed
Enroll result: enroll-stage-passed
Enroll result: enroll-stage-passed
Enroll result: enroll-remove-and-retry
Enroll result: enroll-stage-passed
Enroll result: enroll-remove-and-retry
Enroll result: enroll-stage-passed
Enroll result: enroll-stage-passed
Enroll result: enroll-remove-and-retry
Enroll result: enroll-remove-and-retry
Enroll result: enroll-stage-passed
Enroll result: enroll-stage-passed
Enroll result: enroll-stage-passed
Enroll result: enroll-stage-passed
Enroll result: enroll-completed
```

- ❗ Arch Linux allows for many different choices of desktop environment or window manager, so this guide will focus on the command line method for enrolling fingerprints.
- Install the package `fprintd` for managing fingerprints if it is not already installed. This can be done by opening a terminal and running `sudo pacman -S fprintd`.
- With `fprintd` installed, fingerprints can be enrolled by running the command ```fprintd-enroll``` which defaults to enrolling the right index finger.
 - ❗ Other fingers can be chosen by adding `-f` after the `fprintd-enroll` command. Fingers are named in all lower case with dashes used in place of spaces. For example `fprintd-enroll -f right-middle-finger`.
- After running this command tap and lift the finger repeatedly until enrollment is complete.
- Further information on the `fprint` can be found on the [Arch Wiki](#).

⚠ If you're experiencing issues getting your fingerprint reader working, please [follow our help](#)

[guide](#) to get your reader working
for you on Fedora.

Step 13 — Completing Setup



- We're almost done. Please follow the links to your Framework Laptop 12.
 - Click here for the completion guide for [Framework Laptop 12 \(13th Gen\)](#).
 - Click here for the completion guide for [Framework Laptop 12 \(Core Series 3\)](#).
- Using Tablet Mode. Simply follow the appropriate link above matching your hardware to complete setup. Once that step is completed, you can then fold back the screen into tablet mode. The on-screen keyboard appears when you enter any text field like application search, text editing, etc.

 [Stylus Setup and Troubleshooting on Linux](#)

Step 14 — Recommended: Updating to the latest firmware



- Update your BIOS/Firmware. Open the terminal, run the following command and follow the directions. If there are no updates available, that is completely fine. This just ensures you are current.
 - ⚠ **IMPORTANT:** We do NOT recommend updating BIOS and firmware using various GUIs. We recommend using fwupdmgr as provided in the step above. Using GUIs can potentially create issues that would not be present using fwupdmgr directly.
 - ⚠ LVFS may not update if the battery is at 100%. If you experience issues, discharge to 95%, plug AC back in, then re-run fwupdmgr update.
- `sudo pacman -S fwupd && sudo systemctl enable --now fwupd`
- `fwupdmgr refresh --force`
- `fwupdmgr get-updates`
- `fwupdmgr update`

Step 15 — Troubleshooting Arch Linux



- If you need additional help, feel free to visit our [active support community](#).

Enjoy using Arch on your Framework Laptop 12! If you have any questions or run into any issues, we recommend bringing them to the Community in the [Linux Arch topic](#). Members of the Framework team participate in discussions there.