





03 - Single Monitor Mount

Written By: Eric Sutter

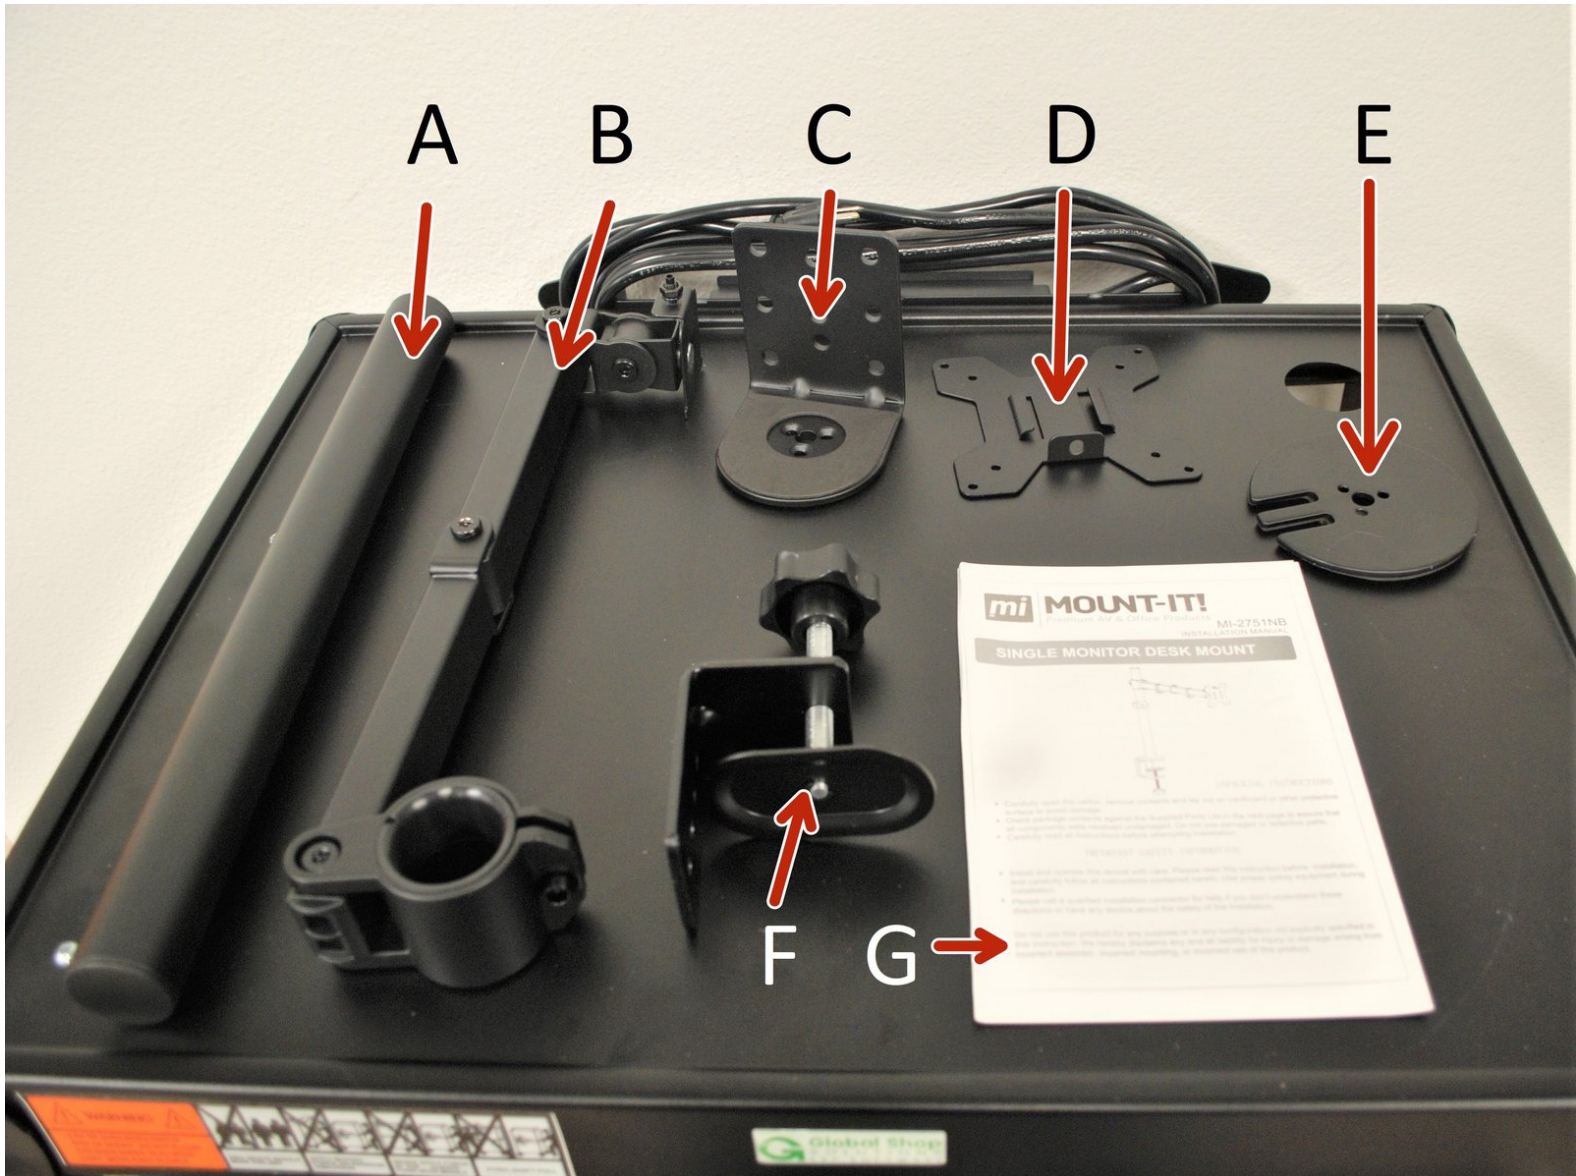


Step 1 — Unpacking and Inspection

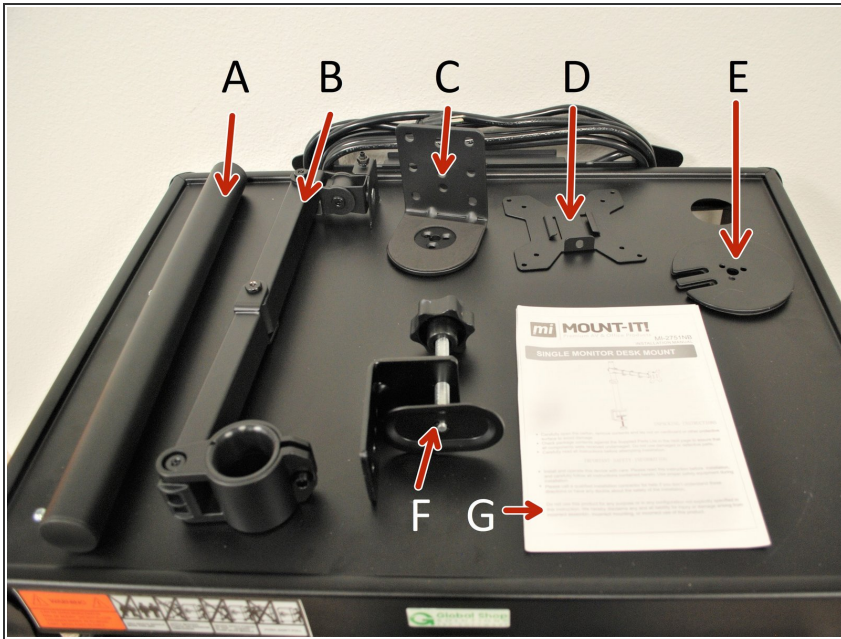


- A. Support Beam
- B. Swivel Arm
- C. Clamp Brace (not needed for this build)
- D. VESA Plate
- E. Grommet Base
- F. Clamp (not needed for this build)
- G. Installation Manual

Step 2 — Unpacking and Inspection

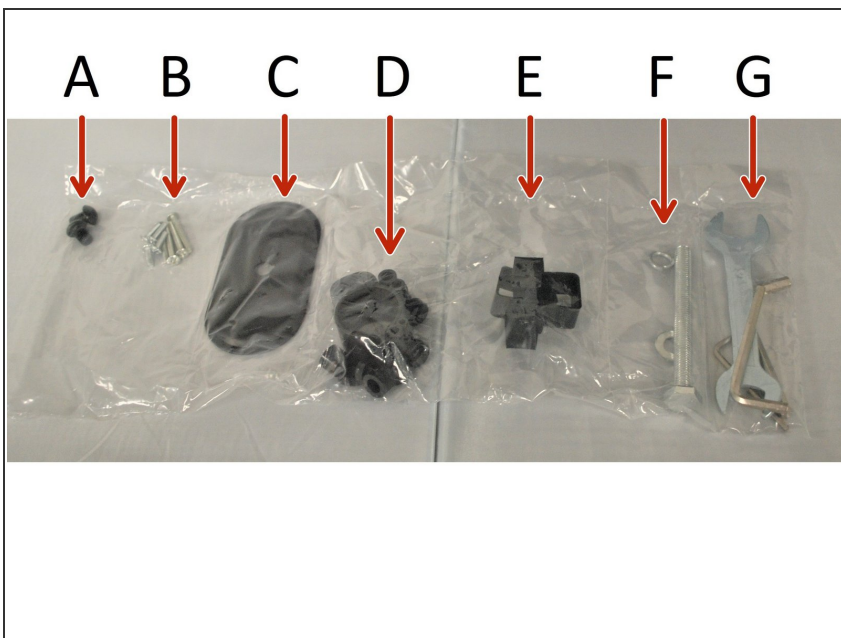

- A. (2) M8x12 Bolt
- B. (4) M4x12 Bolt, (4) M4x30 Bolt
- C. Support Plate
- D. (8) M8 Spacer, Wire Clip
- E. (2) Wire Clip
- F. M10 Bolt, M10 Washer, Spring Washer
- G. Wrench, Allen Key Set

Step 3 — Preparing the Support Beam

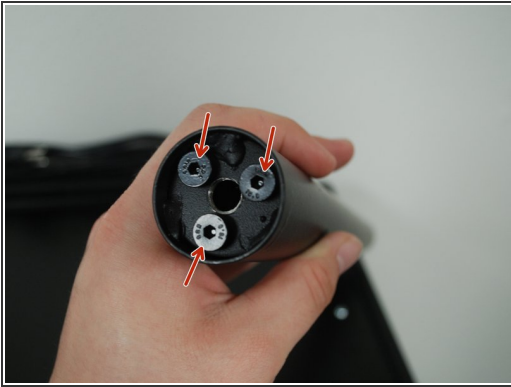

- Identify the 3 bolts at the base of the support beam.
- Remove the 3 bolts using the Allen Key.
- Place the Grommet Base on the Support Beam and align the holes.
- Reinsert the bolts through the Grommet Base and into the Support Beam and tighten with the Allen Key.
- Place the Support Beam on the Grommet Base over the hole on the top platform of the cart.

Step 4 — Preparing the Bolt




- Remove the following from the packaging:
 - A. M10 Washer
 - B. M10 Bolt
 - C. Support Plate
 - D. Spring Washer
- Take the M10 Bolt and slide on the Spring Washer, then the M10 Washer
- Add the Support Plate to the M10 Bolt facing the way shown in image 3

Step 5 — Adding the Bolt




- Look below the cart tier to view the bottom of the Support Beam through the hole.
- Begin to screw in the bolt to the center hole of the support beam using the wrench provided.
 - ❗ It helps if you hold the support plate against the shelf while you tighten the bolt.
- Once the bolt is tightened all the way, it should look like Image 3.

Step 6 — Adding the Swivel Arm

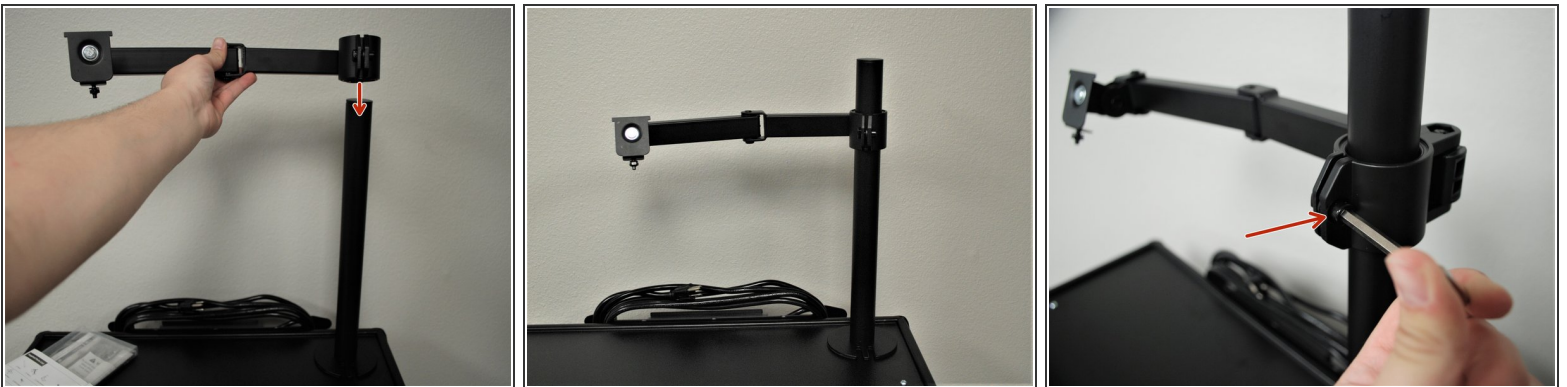


- Slide the Swivel Arm over the Support Beam to the desired height.
 - ❗ It is recommended you go 2-5 inches down to ensure there is enough room for the monitor.
- Use an Allen Key to tighten the bolt shown to tighten the grip the Swivel Arm has on the Support Beam.

Step 7 — Preparing the Monitor

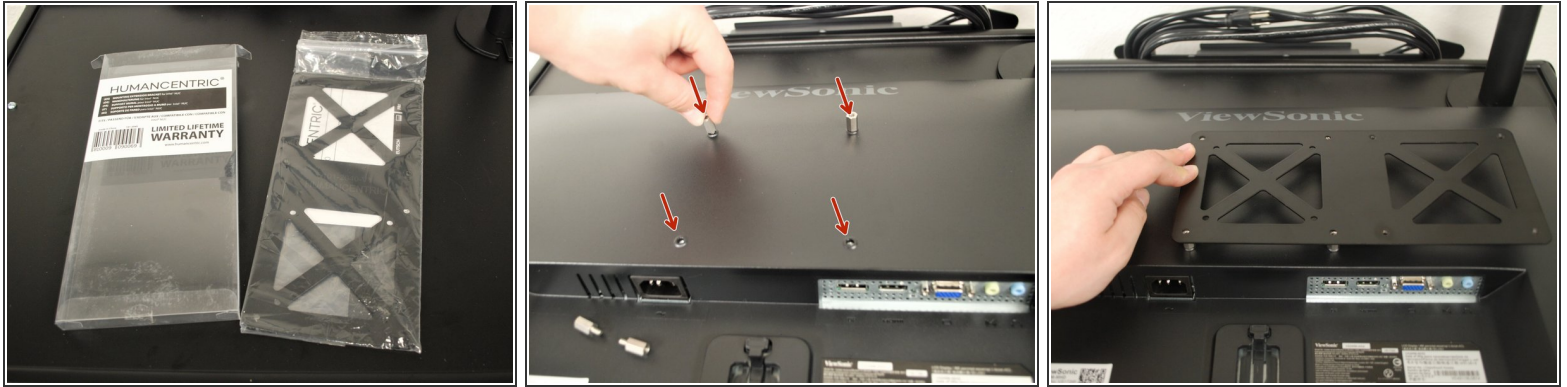



- Remove the provided monitor from the packaging.
- Remove the mounting extension bracket from the packaging.
- Twist the metal spacers into the 4 holes in the back of the monitor.
- Set the mounting extension bracket on the metal spacers and align the holes.

Step 8 — Securing the Bracket

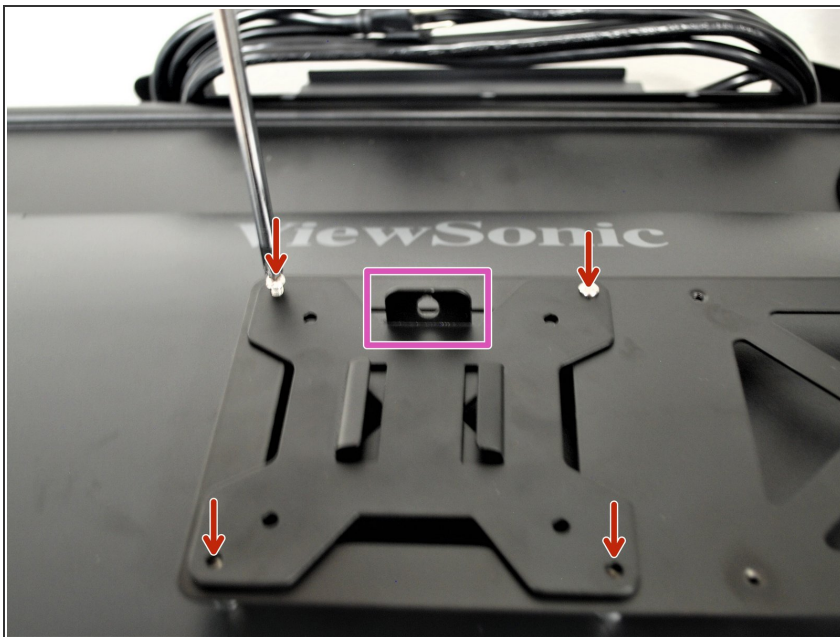



- Place the VESA Plate provided over the extension bracket.
 - ⓘ Ensure the tab with the hole (shown by the magenta box) is facing up.
- Using a screwdriver, screw in the screws provided with the extension bracket.
- Do this for all 4 holes into the metal spacers.

Step 9 — Preparing the Mount

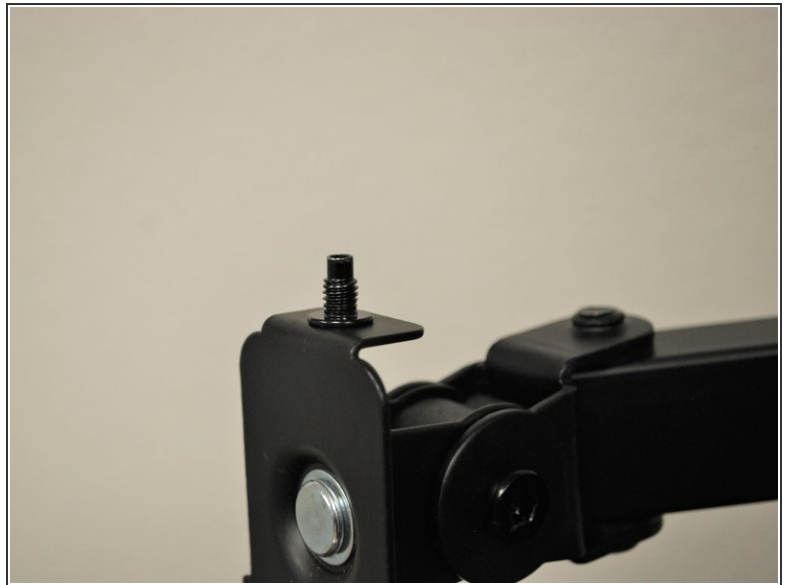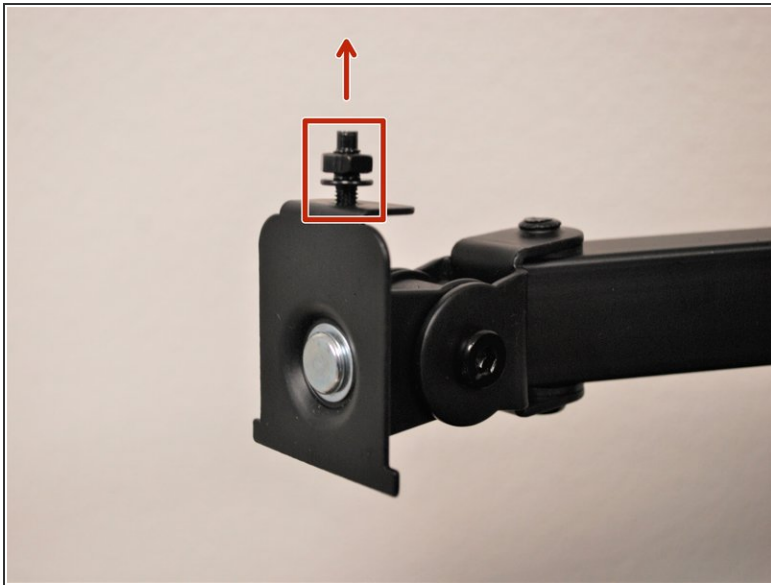


- Ensure the bolt with the nut is facing up.
- Remove the nut from the bolt.
- Tighten the bolt down into the mount.

Step 10 — Mounting the Monitor

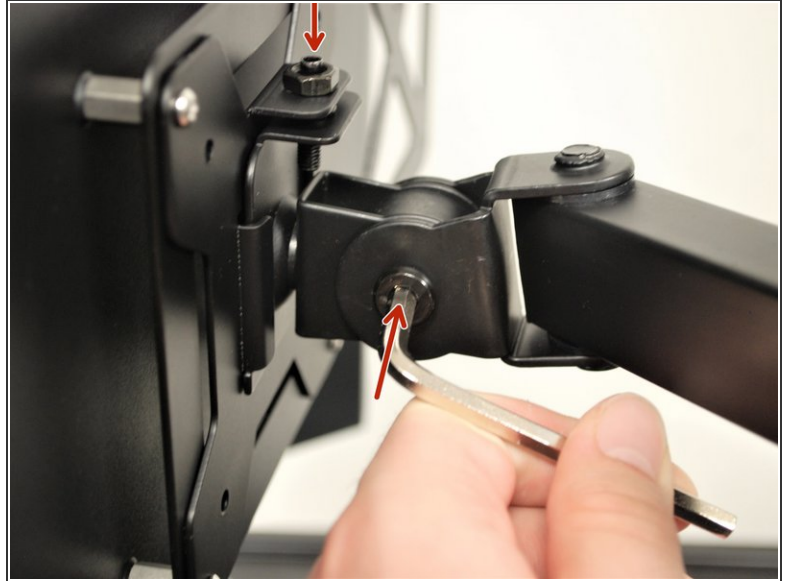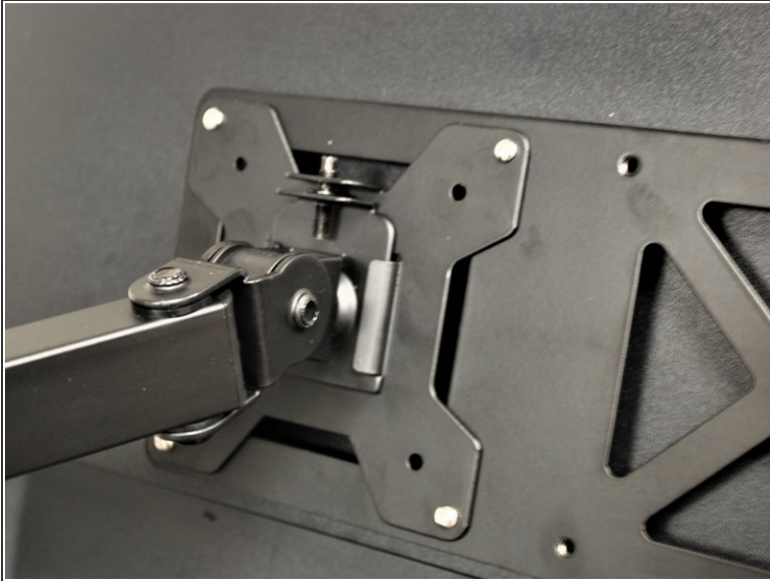

- Slide the monitor VESA Plate over the Swivel Arm mount.
- Reinstall the nut on the bolt to secure the monitor.
- Tighten the bolt shown to set the monitor in place. This will stop it from falling on it's own.

Step 11 — Powering the Monitor

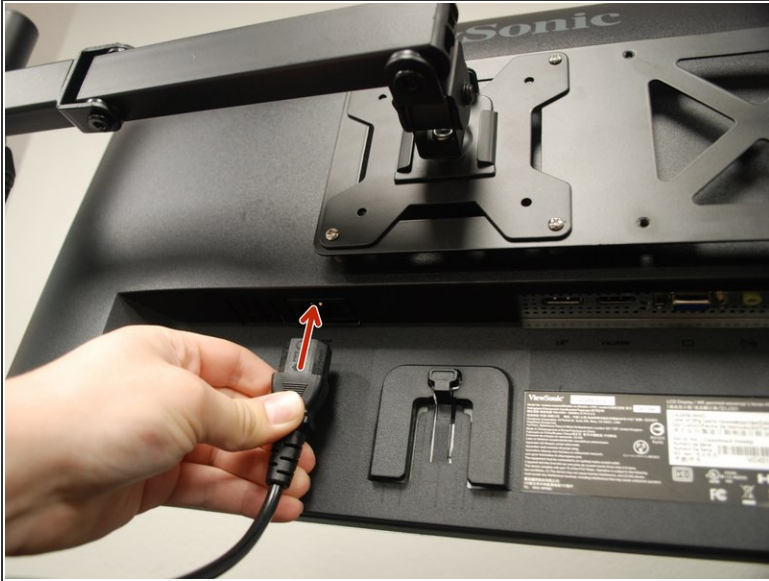

- Insert the power cable into the back of the monitor.
- Plug the other end into the outlet behind the cart.