
Connex: Wiper Cleaning


How to clean the wiper.

Written By: Erik Hung

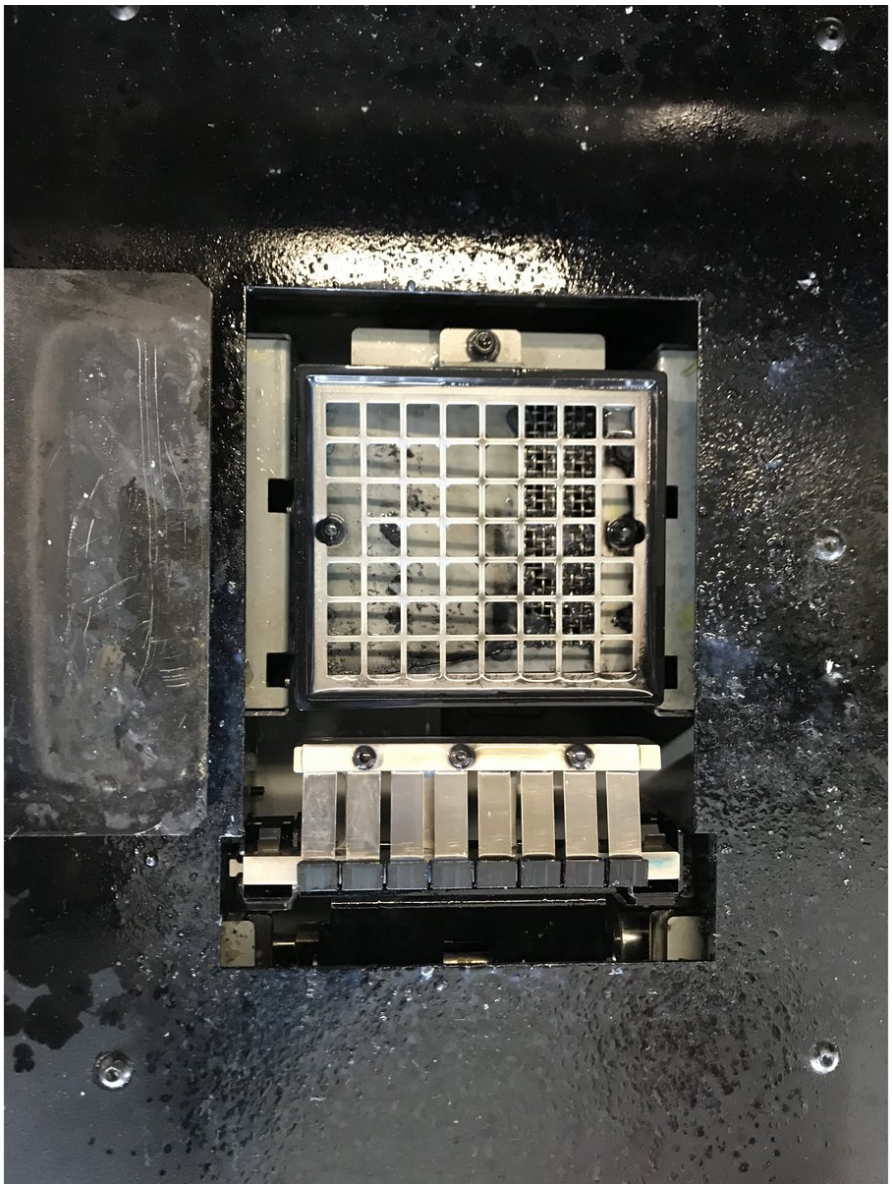

© 2022

Step 1 — Wiper Cleaning Wizard

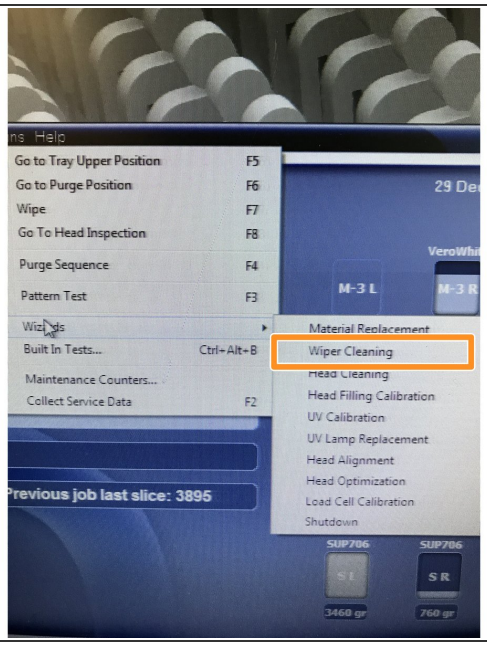

- Options -> Wizards -> Wiper Cleaning

Step 2 — Remove Wiper





- After the wiper is exposed, slide one finger under the top left corner of the beam and keep one finger on the bottom right corner
- Using the right corner as leverage, lift up the left side, popping the wiper out of the socket

⚠ Be careful not to bend the 8 metal strips holding the rubber wipers

- If the metal strips bend, the wiper will not come in contact with the print heads

Step 3 — Clean Wiper

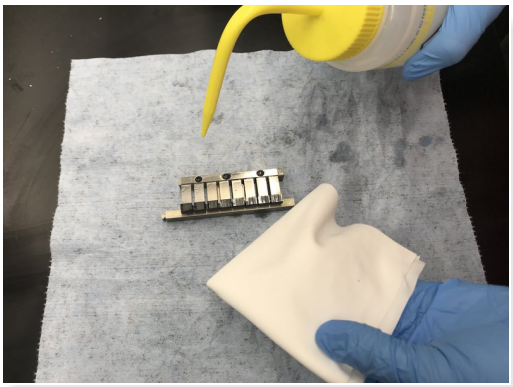

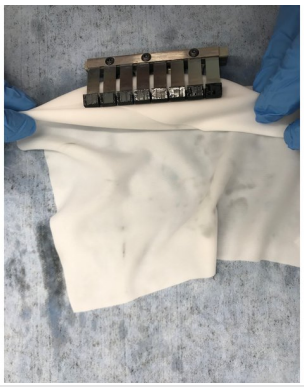



- Set the wiper on a blue towel and Isopropyl Alcohol and a microfiber cloth
- Soak the microfiber cloth with IPA
- Start by cleaning the sturdy frame, making sure to wipe down all the corners
- Clean in-between the rubber wipers and the frame, dragging the cloth slowly to catch resin
- Using a single layer of the microfiber cloth, "floss" between each rubber wiper

© 2022

Step 4 — Reattach Wiper



- To insert wiper back into the printer, insert the wiper from the non-slotted end first
- Support the black frame with one finger underneath and push the metal frame into the socket
- Once the right side is in, push the left side into the notch and the wiper will be in place

ⓘ If the black frame is not supported, it will get pushed down, you can reset the black frame by pushing back the door under the south side of the opening

© 2022