WEXXAR BEL

How to Maintain Your Dekka Tape Head


Perform these maintenance tips to keep your tape head operating at peak performance.

Written By: Wexxar WISE Admin




© 2024


Step 1 — Tape residue

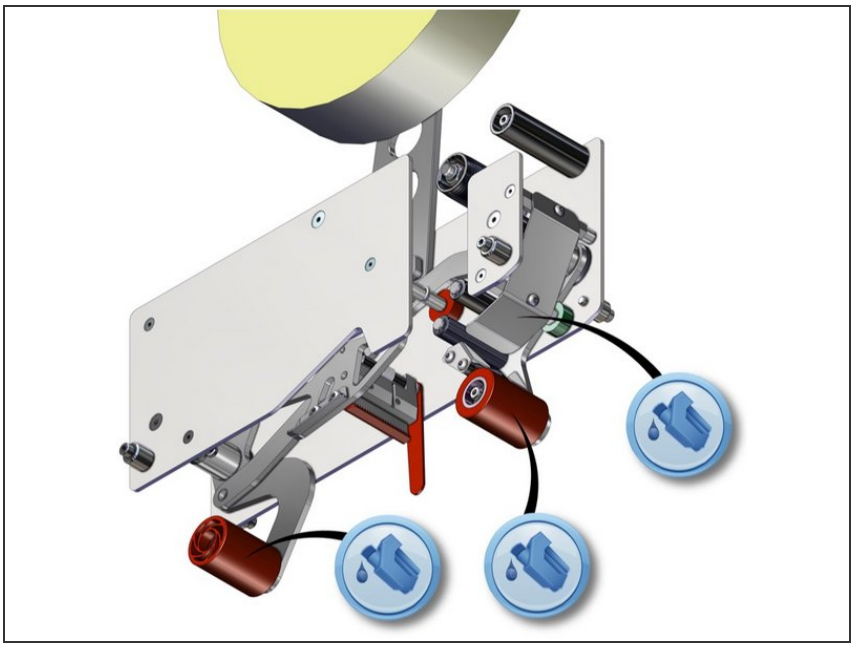

- Do this task at the end of every day.
- Use solvent to remove tape pieces and residue from the **Tape Guide**, **Finger Adjustment**, **Contact** and **Wipe Down rollers**.
- ⚠ Do not use a knife on the **Contact** and **Wipe Down** rollers.

Step 2 — Cut-off Knife

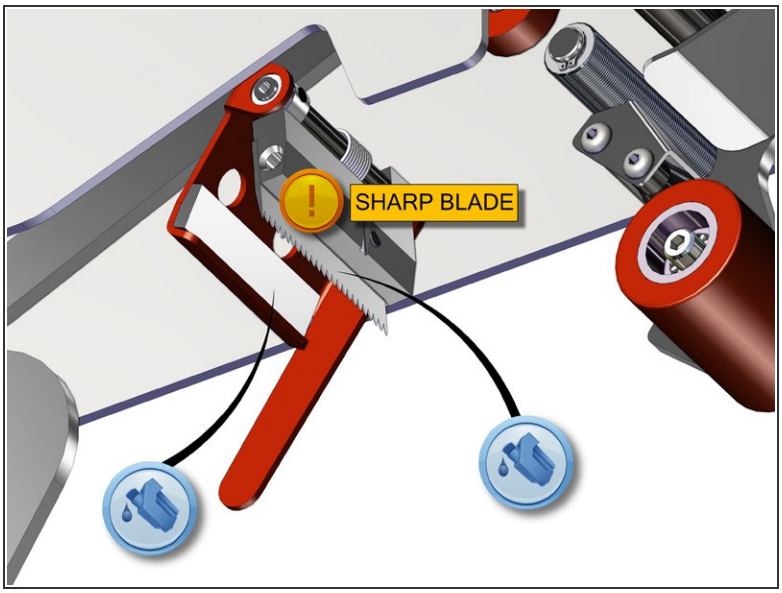

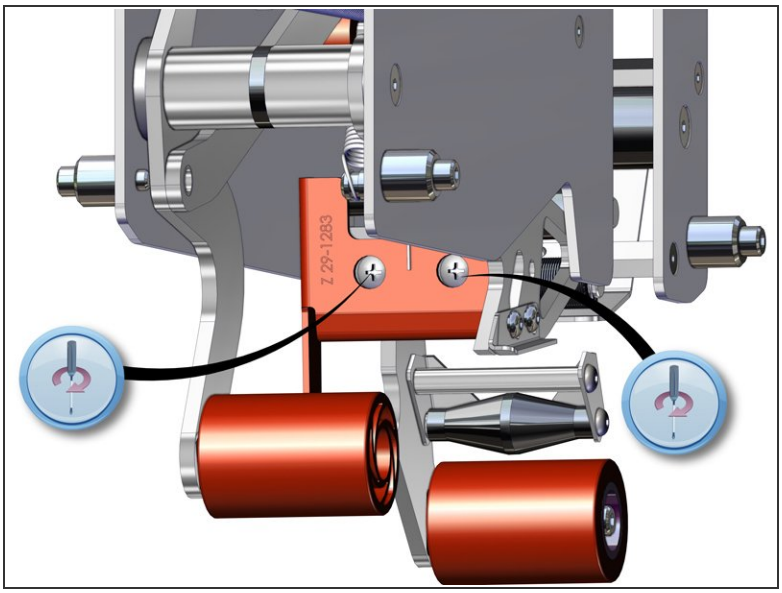

- (Daily) Oil the knife and felt pad with light machine oil.


⚠ The knife blade is extremely sharp. Use caution when cleaning.

- (Every 3 months) Tighten the knife blade's retainer screws.

ⓘ Use the holes in the guard to loosen and tighten retainer screws,

© 2024

Step 3 — Contact rollers and springs

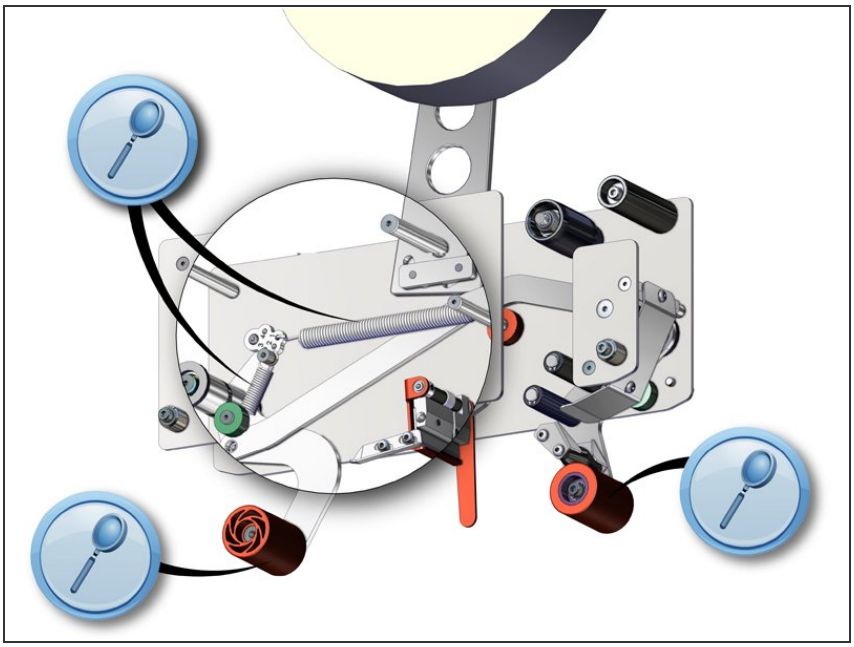



- (Daily) Apply talcum powder to the **Contact** and **Wipe Down** rollers to improve static cling to the tape.
- (Weekly) Check the rollers and replace them if they are freely spinning or damaged.

⚠ Do not oil the rollers.

- Check all springs for lively action and replace if necessary.

Step 4 — Tape Tension

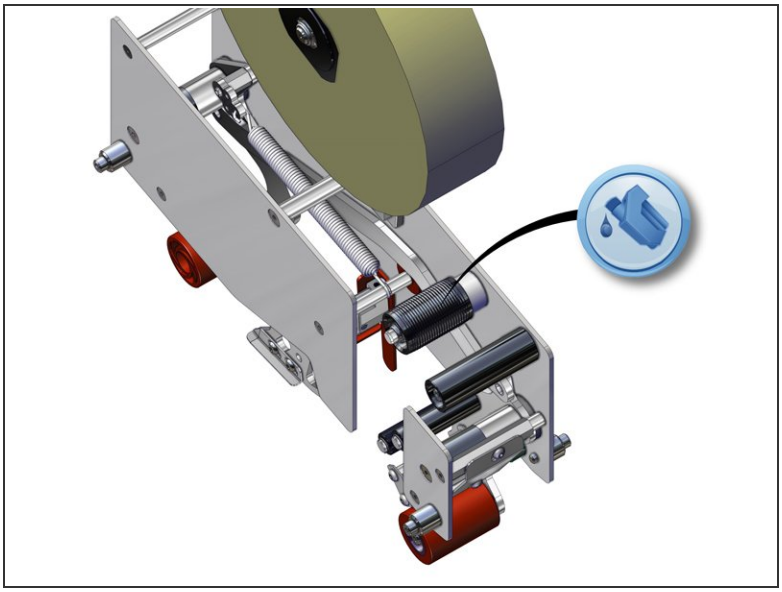

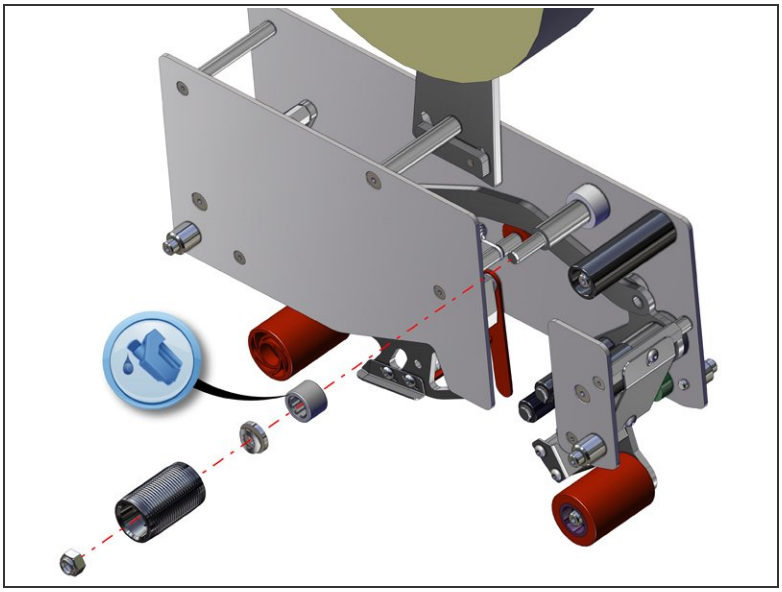

- (Weekly) Clean the Clutch Roller with light solvent.
- (Every 3 months) Remove the Clutch roller, wash bearing with solvent, and blow out with air. Oil with light machine oil and reassemble.

© 2024

Thank you for contacting us. For us to better assist you, please reach out to our technical support by phone at 1.888.565.3219 or 604.930.9300 or by email at Wexxar.Service@promachbuilt.com or Wexxar.Parts@promachbuilt.com along with your machine model and serial number. One of our tech support reps will be glad to answer any questions you may have.