
Splicing the Tape of Your DEKKA SE V3 Tape Head

Written By: Wexxar WISE Admin

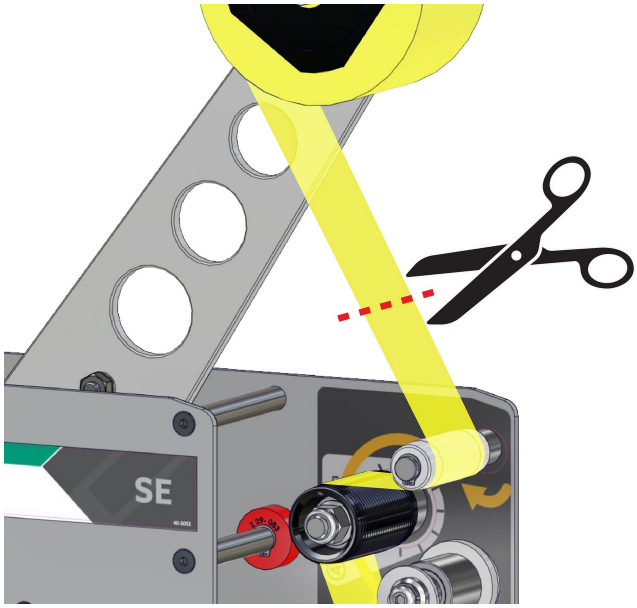


INTRODUCTION

Your Dekka SE V3 Tape Head can be loaded with a new tape roll without removing it from your machine. Two methods are used to load a new tape roll:

- **Threading**: Use this method if the roll has run out of tape or is being fed for the first time. To learn more, see Threading Your DEKKA SE V3 Tape Head .
- **Splicing**: Use this method if your tape head's roll is almost finished and is still threaded. Follow the steps below to learn more.

© 2024


Step 1 — Cut Between the Roll and the Threaded Tape

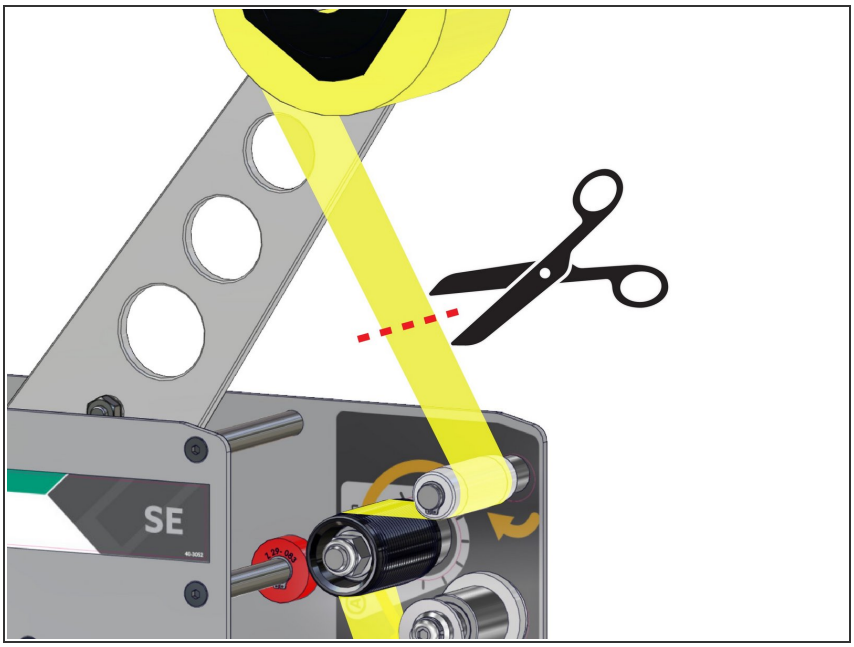


⚠ **NEVER use a blade to cut tape against the rollers.**

- Cut between the roll and the threaded tape so that tape remains threaded in the tape head feed rollers.

Step 2 — Replace the Tape Roll

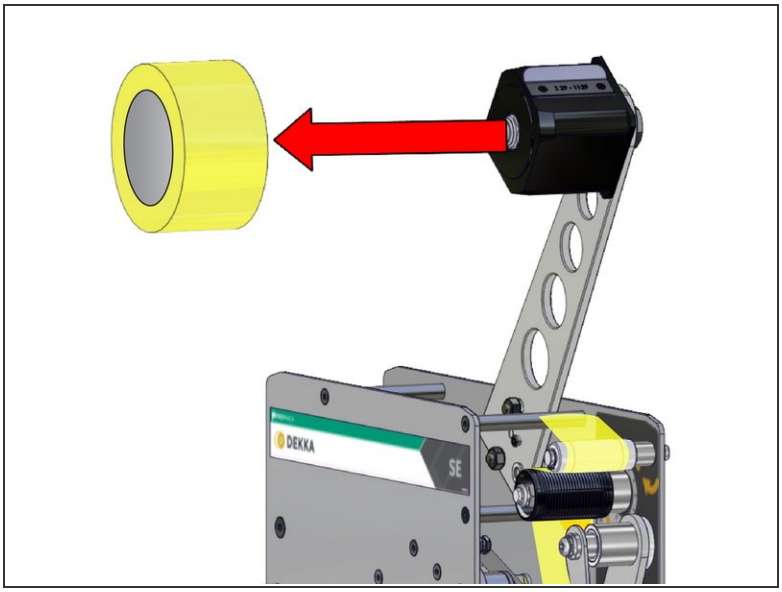


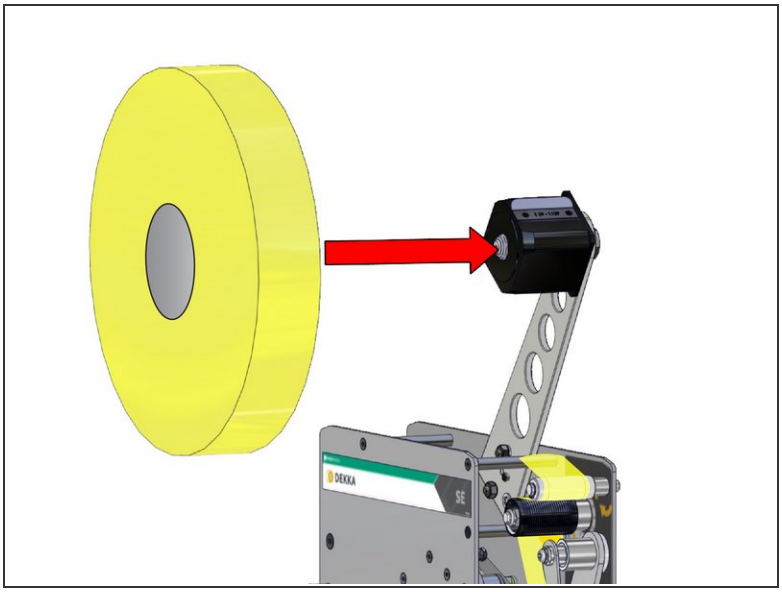

- Replace the old tape roll with a new one.


© 2024

Step 3 — Splice the New Tape Roll

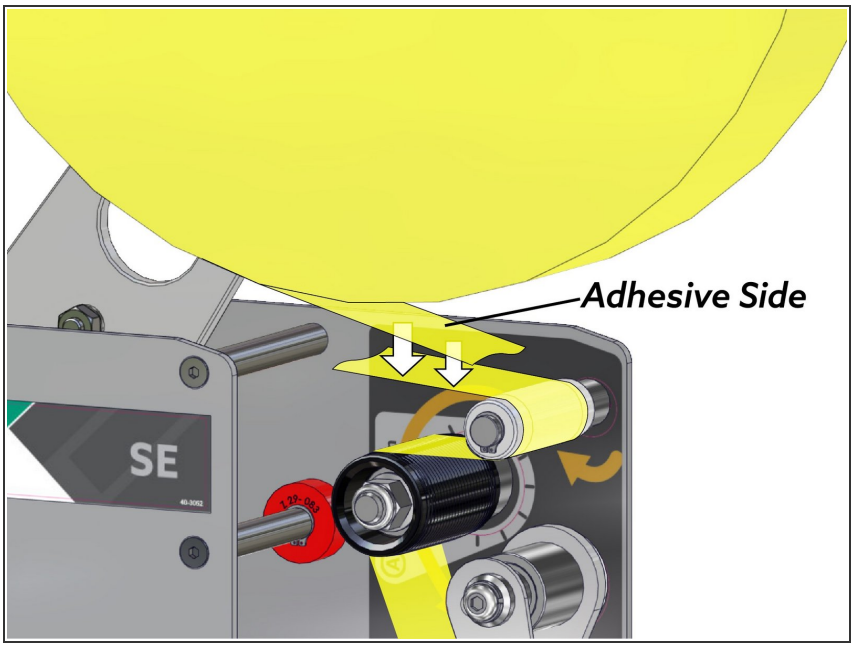

- Stick the end of the new tape roll onto the tape remaining in the feed rollers.

Step 4

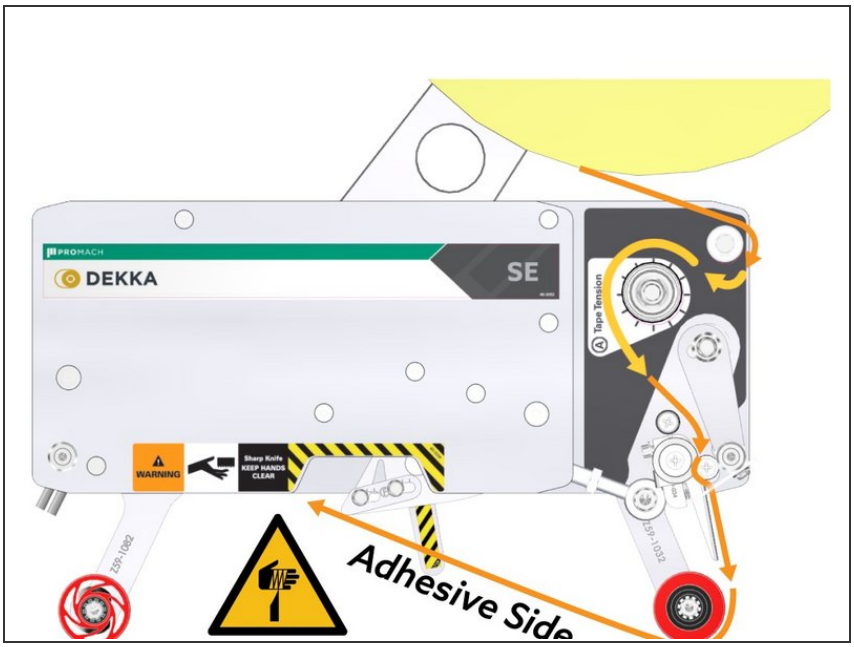

⚠ **NEVER use a blade to cut tape against the rollers.**

- Pull the old tape, attached to the new tape roll, through the feed rollers.
- Cut the threaded tape by pulling it across the tape head blade.
  - ⓘ The Roller Arm will move in as you pull the threaded tape across the blade.

Thank you for contacting us. For us to better assist you, please reach out to our technical support by phone at 1.888.565.3219 or 604.930.9300 or by email at Wexxar.Service@promachbuilt.com or Wexxar.Parts@promachbuilt.com along with your machine model and serial number. One of our tech support reps will be glad to answer any questions you may have.